


7286-PT SERIES

DOOR PROP ALARM HOOK UP


EXIT TIMER DELAY 0-60 SECONDS
SET FOR AUTHORIZED DOOR OPEN TIME

PROP TIMER DELAY 0-60 SECONDS
SET FOR DOOR PROP WARNING PERIOD
(SOUNDS STEADY FOR SET TIME THEN PULSES
IN ALARM MODE)

- ① *NOT USED
 - ② EXIT TIME JUMPER
ON=0-60 SEC.ADJUSTABLE
OFF=0-10 SEC.ADJUSTABLE
 - ③ PROP TIME JUMPER
ON=0-60 SEC.ADJUSTABLE
OFF=0-10 SEC.ADJUSTABLE

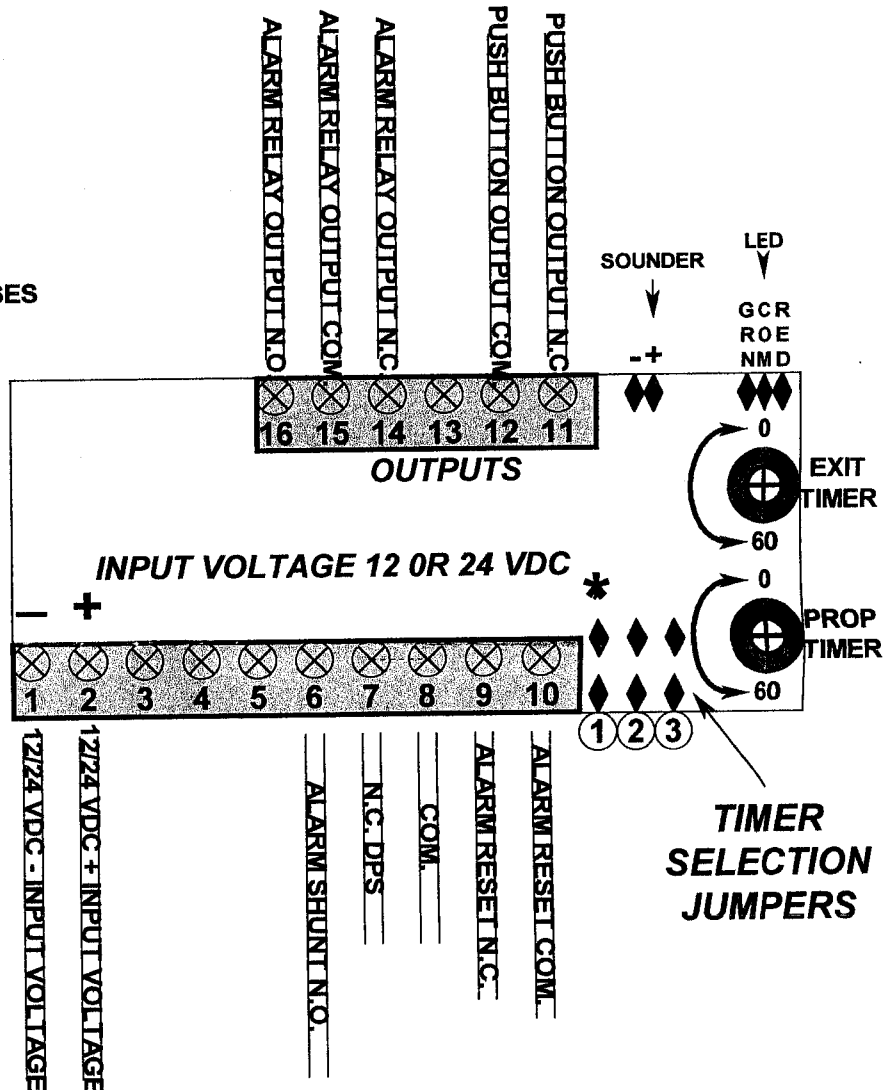

TIMER ADJUSTMENT

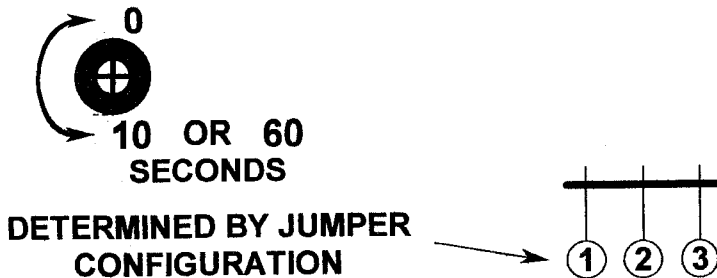

INPUT VOLTAGE 12 OR 24 VDC
SWITCH & RELAY RATING
SPDT UP TO 30 VDC
RATED @ 2 AMP
CURRENT DRAW 75 mA PER UNIT

7286-PT THEORY OF OPERATION

UPON POWER UP A SHORT BEEP WILL SOUND
THIS ARMS THE UNIT.

WITH THE DOOR CONTACT IN THE CLOSED (N.C.) STATE
THE LED IS STEADY AMBER UPON OPENING THE DOOR
CONTACT THE THE **EXIT TIMER** BEGINS COUNTING DOWN.

UPON COMPLETION OF THE EXIT TIME COUNT DOWN THE
LED TURNS RED AND A STEADY AUDIBLE WARNING TONE
BEGINS. THIS PERIOD OF TIME IS DETERMINED BY THE **PROP
TIMER**.

UPON COMPLETION OF PROP WARNING PERIOD THE
LED FLASHES, THE PIEZO EMITS A PULSING
AUDIBLE AND SIMULTANEOUSLY ACTIVATES THE
ALARM RELAY OUTPUT.

**RESET IS AUTOMATIC BY CLOSING DOOR (WITHOUT RESET
SWITCH ACROSS TERMINALS #9 & #10)**

OR

**RESET BY N.C. RESET SWITCH ACROSS TERMINALS #9 & #10
(CLOSING DOOR WILL NOT RESET)**