

Reel Catalog



Hose, cord and cable reels



Why use hose reels?

Why use hose reels? Because they make hose handling more efficient and safer. Your hoses, cables and cords will last up to five times longer. You will improve hose management, which decreases labor costs. Your chances of injuries from tripping

hazards will decrease, which saves lost work time, medical bills and higher insurance. You also save the expense and time to replace expensive hoses, cables and cords that get run over by fork lifts and other vehicles.



Truck courtesy of E&B Paving, Anderson IN

Five reasons why hose reels add value



Improve efficiency

Hoses, cable and cords are where you want/need them.



Increase safety

Reduce tripping accidents and lost work time.



Minimize leakages

Reduce costs of air and water leakages.



Reduce hose wear

Hose and cords on reels can last up to five times longer.



Increase productivity

No more tangled hoses improves efficiency.



Series 7000

Front Cover: L-R: Nordic Series Large Frame Reels; Series 7000; Series 7000 & 80000 Reels, photo courtesy of Utility Fleet Sales, Bryan, TX

Back Cover: L-R: Series 30000; Series TW7000, truck provided by E&B Paving, Anderson, IN; Series 30000, photo courtesy of Zedos United, Singapore.

OSHA says reduce your trips and falls

"There are many situations that may cause slips, trips and falls. The controls needed to prevent these hazards are usually obvious, but too often ignored, such as... coiling up extension cords, lines and hoses when not in use and keeping electrical and

other wires out of the way." OSHA's "Fall Prevention Tips" include, "Practice good housekeeping. Keep cords, welding leads and air hoses out of walkways or adjacent work areas."

Source: www.osha.gov

Same-day quick ship program offers fastest service

Because we are centrally located in the US and have three North American warehouses, upon request, we can quickly ship our standard products the same day for domestic orders of five or fewer standard models. Orders must be received by 11:30 am local time. Look for the shipping icons in this catalog for designated models. For the most current list of Quick Ship reels, please visit www.reelcraft.com.



Two Year Limited Warranty and Return Policy

Reelcraft now offers a two* year limited warranty. All products manufactured by Reelcraft Industries, Inc. are warranted to be free of defects due to faulty material or workmanship for 24 months from date of shipment, except hose. For complete warranty information, online warranty registration, service manuals, and return information please visit www.reelcraft.com or call Reelcraft's Customer Service Department toll-free at 1-800-444-3134. *90 days for Series LD, LG and LH cord reels.





Reelcraft: Better by Design

Reelcraft's reels are better by design because of our lasting commitment to excellence. Our engineering team is well known for designing durable, high quality products. Our standard

features include durable, corrosion-resistant powder coat paint, multi-position guide arms for versatile mounting options and heavy-duty, reinforced steel stampings for increased

strength. Our reels are permanently factory-lubricated for a long, trouble-free service life. All of these features, and many more, add up to make "The Reelcraft Difference."

Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

Improved Connection

The elongated brass connector and proprietary adhesion process provide a better crimp to the hose.

Stress-free Swivel

Our full-flow design combines the highest grade seal design with supporting bearing surfaces to insure the longest possible life.

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.

Long Service Life

Field-proven swivel assures long service life.

Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

Kinkless Hose

High quality PVC hose is specially blended for use on reels

Scaled Connection Points

Swivel and hose inlet connections seal against leaks

Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment

Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance

Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.



Robust Latch

Wide profile combined with special spring assures maximum service life.

Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Series 7000

Shown: 7850 OLP

Table of Contents



Reelcraft is the industry leader for hose, cord and cable reels available anywhere in the world. We manufacture a complete line of products for many professional and commercial applications including industrial, automotive, construction, aviation, fuel delivery, welding, maritime, food processing, chemical delivery, turf/ag, custom reels and much more. Our key focus is to develop quality products that make hoses, cords and cables more productive, keep them easily accessible and make them last longer. Reelcraft is a highly innovative company in our product development and our manufacturing techniques. We have been ISO 9001:2008 accredited since 1996 and we lead the industry in developing new cutting edge products. Our lean manufacturing and Six Sigma programs give us the core competencies to continue to deliver the world's best reel products.

Reelcraft Industries is
ISO 9001:2008
Certified Since 1996

Lighter, economical 8 Series RT

1/4", 3/8", 1/2" I.D.

An economical, lighter hose reel designed for low, medium and high pressure applications.



Series RT
Patent No. 7,150,425

Compact reels 9 Series 4000 / 5000 / 5005

1/4", 3/8", 1/2" I.D.

For all general air, water, oil or grease applications.



Series 5005

Heavy duty reels 10 Series 7000

1/4", 3/8", 1/2", 3/4" I.D.

Our best-selling reel for low, medium and high pressure applications.



Series 7000

Dual pedestal reels 11 Series DP5000 / DP7000

1/4", 3/8", 1/2" I.D.

Compact interlocking base and balanced swivel.

NEW!

Series DP5000
Patent Pending



Mobile base reels 12 Series D8000 / E8000

1/4", 3/8", 1/2" I.D.

The aluminum cast base and arm offer the highest rigidity among this class of hose reels.



Series D8000

Dual pedestal reels 13 Series 80000 / D80000

3/8", 1/2", 3/4", 1" I.D.

Our largest pedestal-style hose reel with heavy-duty, ball-bearing style swivel for low, medium and high pressure applications.



Series 80000

Low profile reels 14 Series SD10000

3/4", 1" I.D.

Low profile spring driven hose reel designed to handle up to 50' of 3/4" or 1" hose.



Series SD10000

Vehicle-mount reels 15 Series 9000

1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.

Mobile base reel ideal for high volume air, water, fuel and petroleum applications.



Series 9000

Large mobile reels 16 Nordic Series 3100 / 4800

1/2", 3/4", 1", 1 1/4", 1 1/2", 2" I.D.

Great for high volume air, water, fuel and petroleum applications.



Nordic
Series 4800

Twin hydraulic 17 Series TH

1/4", 3/8", 1/2" I.D.

Medium pressure for operating hydraulic cylinders, motors or tools.



Series TH80000

To place an order, please advise:

1. Model number.
2. Product to be handled such as air, oil, water, etc.
3. Maximum operating pressure in P.S.I.
4. Maximum operating temperature in degrees Fahrenheit.
5. Hose inside and outside diameters and length.
6. Installation height, especially if more than 16 feet.

7. Desired guide arm position by adding one of the suffixes to the model number. Example: 5635 OLP SW for side wind. Refer to the guide arm chart for guide arm suffix codes.

Additional Considerations:

A flexible connection between the reel and the source of supply is required to prevent possible misalignment and binding. Non-flexible connections will void the warranty.

The pressure rating of inlet hose must be equal or greater than the rating of the reel.

Accessories

Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hose.

Additional questions? Please visit reelcraft.com or call for assistance.





Table of Contents

Fuel reels

18

3/4", 1", 1 1/4", 1 1/2" I.D.

For low pressure applications.
Equipped with fuel-grade hose.

Series 80000 Fuel



Grounding reels

18

Series G 3000

Used to dissipate static electricity when transferring flammable materials on fuel trucks, in chemical plants and more.



Grounding Reels

Stainless steel reels

19

3/8", 1/2", 3/4", 1" I.D.

Full line of stainless steel reels for low and medium pressure applications.

7000 OMS



Pre-rinse, drinking water hose reels

20

3/8", 1/2" I.D.

Several models for pre-rinse applications and potable (drinking) water.



Drinking water

Pre-rinse

Composite reels

21

Series S

3/8", 1/2", 5/8" I.D.

Lighter weight, easy-to-handle for low pressure air, water, chemical delivery or welding. Ideal for wash-down applications.



Series S

Pressure wash

22

Series PW / H18006 / 30000

1/4", 3/8", 1/2" I.D.

Many models for high pressure applications. Spring driven, hand crank and motor driven rewind.

Series PW7000



General use

23

Series CU / CT / CM

3/8", 1/2" I.D.

Hand crank: ideal for lighter duty general use or pressure wash applications.

Series CU



NEW!



Series CT

Medium Duty

24

Series H

3/8", 1/2", 3/4" I.D.

Hand crank: ideal for medium duty applications requiring longer hose.



Series H

Heavy duty, long hose lengths

24-25

Series 30000

1/2", 3/4", 1" I.D.

For low and medium pressure applications requiring long hose. Hand crank, air motor, bevel crank and electric motor rewind.



Series 30000

COPYRIGHT NOTICE

All rights reserved. No part of the material protected by this copyright may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording, broadcasting or by any other information storage and retrieval system without written permission from Reelcraft Industries, Inc.

Reelcraft, Work Smarter, Nordic, Hose Boss, Safe-T-Reel, Better by Design, Built Better to Perform Better and Rely on Reelcraft are the trademarks and service marks of Reelcraft Industries, Inc. registered in the United States and/or other jurisdictions. You shall not display, disparage, dilute or taint our trademarks and service marks, or use our marks in such a way that would misrepresent the identity of the owner.

All other trademarks, service marks or registered trademarks appearing on these pages are the trademarks or service marks of their respective owners. Super Swivel, Full Circle swivel, Viton, Quiet Speed, Buna, Push Lok, Stubby, Stubby II, Delrin and Pos-i-Latch are not owned by Reelcraft Industries, Inc.



Located in Northeast Indiana since 1971, Reelcraft's global headquarters' office and manufacturing space is a state-of-the-art 130,000 square foot facility.

Reelcraft's global offices serve:

- ✓ Australia
- ✓ Europe/UK
- ✓ Canada
- ✓ Asia/Pacific Rim
- ✓ Central America
- ✓ South America
- ✓ Middle East

Reelcraft Industries is
ISO 9001:2008
Certified Since 1996

1.800.444.3134
www.reelcraft.com

 **REELCRAFT**®

Table of Contents



Reelcraft's product quality starts with modern engineering techniques for maximum strength through better design, better materials and tested and proven products. We are committed to superior manufacturing processes by producing our steel components from hard tooling (dies) that increase product strength and reliability compared with simply bending metal in press breaks. In addition, we offer more levels of industrial products: Good, Better, Best and Ultimate. Our customers report that superior value is why they choose Reelcraft reels. All of these qualities and more add up to make "The Reelcraft Difference."

Reelcraft Industries is
ISO 9001:2008
Certified Since 1996

"A" frame 27

Nordic Series 1200

1/2", 3/4", 1" I.D.

"A" frame design for increased rigidity and maximum durability. Hand crank or motor driven.



Series 1200

Modular, t-slot 30

Series 40

1", 1 1/4", 1 1/2" I.D.

Durable, reliable, modular large frame reel is fully customizable to fit your specs. Gear drive, chain drive, hand crank and bevel crank.



Series 40

Steel large frame 29-33

Nordic Series 2400 / 3900 / 3700 / 5900

1/2", 3/4", 1", 1 1/4", 1 3/8", 1 1/2", 2", 2 1/2", 3", 4" I.D.

Rugged and durable, gear-drive, crank rewind or chain and sprocket drive powered by electric motor.




Series 3700

Propane reels 32

Nordic Series 3900 LPG / LP80000 / LPD80000

1/2", 3/4", 1", 1 1/4", 1 1/2", 2" I.D.

Propane reels designed with U/L certified swivel for LPG dispensing. Motor driven and spring driven reels.



Series 3900 LPG

Petroleum service 34

Nordic Series 3800

1 1/4", 1 3/8", 1 1/2", 2" I.D.

Inverted reel fits under the canopy of petroleum service trucks. Fluid path is designed for dispensing petroleum.



Series 3800

Single wrap reels 35

Nordic Series 6000

1 3/8", 1 1/2", 2", 2 1/2", 3" I.D.

Single wrap reel offers the narrowest profile available to store and retrieve fueling hoses.



Series 6000

Light and medium duty 36

Series LD / LG

Light and power cord reels for less demanding applications. Quality materials offering lighter weight solutions.



LG3050 143 9

Hand crank cord reels 36

Series LH

Portable power made easier with the storage of up to 100' of 10/3 power cord.



LH2080 143

Heavy duty reels 37-41

Series L4000 / L5000 / L7000 / 30000 / Nordic CR

A variety of light and power source options.



L 4035 163 3




LE312 123 12D

Guide Arm Positions and Suffix Codes

Guide Arm Suffix Codes:

The suffix codes (as indicated at right) must be added after the model number to specify desired guide arm position. For example, 5635 OLP **SW** designates side wind guide arm position.

Additional Notes: 9000 series reels are shipped in the **BW** position and the 80000 series is shipped in the **SW** position. All other series reels are shipped in the **TW** position unless otherwise specified. Series 4000 and 5000 reels ordered in the **BW** position are available in constant tension only.

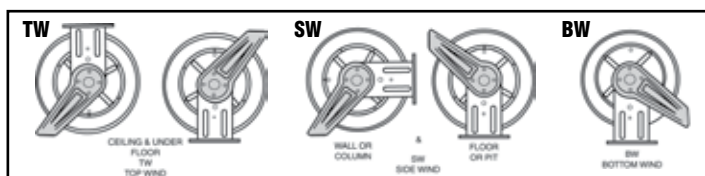

Suffix Codes

- TW Top Wind**
Ceiling and under floor
- SW Side Wind**
Wall or column; floor or pit
- BW Bottom Wind**

Models listed with an icon can be shipped same day upon request when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 Indiana & California Warehouses

California Warehouse
 Canadian Warehouse



Table of Contents

Welding hose reels 42-43

Series TW / STW / BA

1/4", 3/8" I.D.

For low pressure oxygen/acetylene applications. Includes "T" grade reels for a variety of gases.



Series STW

Spring driven welding cable

Series WC7000 / WC80000

Stores work lead or electrode lead cable when not in use.

44



Series WC7000

Hand crank welding cable

Series CEA 30000

Stores work lead or electrode lead cable when not in use.

44



Series CEA30000

Multiple spools

Safe-T-Reel Series

Ideal where space, weight and flexibility are key for manual winding of hose, cord, oxygen / acetylene and welding cable.

45



Safe-T-Reel Series

Tool balancers

Series TB / TBL

Makes tools nearly weightless.

Reduces operator fatigue and damage from dropping tools.

46



Series TB



Low pressure air/water hose

Parts/accessories 47-50

Mounting brackets, chain shrouds, roller brackets, motors, switches, hose bumpers, hose assemblies and replacement hoses.

Eight reel display stand



Display stands

Three reel tabletop display S602155


Four reel tabletop display S602155-1

Six reel display S602037-2

Eight reel display S602037-1

Eight reel centerpiece display *S600539

Conveniently displays up to eight reels and features removable universal brackets for ease of mounting. It is easily assembled/disassembled. Reels sold separately.



Eight reel centerpiece display stand

*Any four Series 4000 or 5000 can be installed on the top. Any four Series RT, 5005 or 7000 can be installed on the bottom. Series RT and 5005 require either 600626 or 600230 additional mounting brackets.

Custom Built Reels

Reelcraft's engineered products group custom builds reels to your specifications. Our special engineered products are developed for demanding applications in areas such as marine, military, aviation, hydro-seeding, sewer and well cleaning, offshore oil rigs, robotic cable and much more. We offer flexibility, competitive pricing and a lasting commitment to excellence. For more than 20 years, Reelcraft's engineered products group has produced custom products to meet individualized requirements.

Reelcraft's Capabilities

Very few size and weight constraints

We build to meet most extreme size and weight constraints.

Special finishes/paint options

Options include galvanized, CARC paint, marine grade epoxy, liquid enamel coat paint and powder coat paint in any color.

Various drive types

Manual crank, motorized, spring drive, hand-over-hand and more.

Wide range of pressures

A wide variety of pressure ranges available

Custom Reels

Built to your specs



from 50 to 15,000 PSI and beyond.

Unique options - Hose Boss™ rewind assist, tensioning bars, multiple fluid paths, level rewinds and much more.

No minimum quantities

Order from 1 to as many as you need.



Marine grade epoxy



Multiple spools



Turn-key solutions



Galvanized finish



Multiple fluid paths



Fiber optic cable



Sewer/jetter



Made

in USA

RT650-OLP
Patent No. 7,150,425

Dimensions		in / mm	
A	17 ⁷ / ₈	454	
B	16 ¹ / ₂	419	
C	6	152	
D	2 ¹ / ₄	57	
E	See Chart		

Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.



Nitrogen Reels
RT650-OLPG-GN20



Side-Mount Reels
RT650-OLPSM

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(M)NPTF Outlet in	(F)NPTF Inlet in	Hose Length ft / m	Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	E in / mm
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)											
RT425-OLP	19 9	300 21	1/4 6	.475 12	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5% 146
RT435-OLP	21 10	300 21	1/4 6	.475 12	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5% 146
RT450-OLP	24 11	300 21	1/4 6	.475 12	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5% 146
RT465-OLP	25 11	300 21	1/4 6	.475 12	1/4	3/8	65 20	RT406-OLP	21 10	300 21	5% 146
RT625-OLP	20 9	300 21	3/8 10	.600 15	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5% 146
RT635-OLP	21 10	300 21	3/8 10	.600 15	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5% 146
RT650-OLP	27 12	300 21	3/8 10	.600 15	1/4	1/2	50 15	RT605-OLP	22 10	300 21	6% 159
RT825-OLP	26 12	300 21	1/2 13	.750 19	1/2	1/2	25 8	RT802-OLP	23 10	300 21	6% 159
RT835-OLP	27 12	300 21	1/2 13	.750 19	1/2	1/2	35 11	RT803-OLP	23 10	300 21	6% 159
RT850-OLP	37 17	300 21	1/2 13	.750 19	1/2	1/2	50 15	RT805-OLP	25 11	300 21	7% 197
Medium Pressure Oil Reels Maximum Temperature 150° F (65° C)											
RT625-OMP	27 12	1000 69	3/8 10	.710 18	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5% 146
RT635-OMP	30 14	1000 69	3/8 10	.710 18	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5% 146
RT650-OMP	35 16	1000 69	3/8 10	.710 18	3/8	1/2	50 15	RT605-OMP	25 11	1000 69	7% 197
RT825-OMP	31 14	1000 69	1/2 13	.850 22	1/2	3/8	25 8	RT802-OMP	23 10	1000 69	6% 159
RT835-OMP	32 15	1000 69	1/2 13	.850 22	1/2	1/2	35 11	RT803-OMP	23 10	1000 69	6% 159
High Pressure Grease Reels Maximum Temperature 150° F (65° C)											
RT425-OHP	28 13	5000 345	1/4 6	.580 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5% 146
RT435-OHP	30 14	5000 345	1/4 6	.580 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5% 146
RT625-OHP	30 14	4000 276	3/8 10	.730 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5% 146
RT635-OHP	34 15	4000 276	3/8 10	.730 19	3/8	1/2	35 11	RT603-OHP	22 10	5000 345	6% 159
RT650-OHP	46 21	4000 276	3/8 10	.730 19	3/8	1/2	50 15	RT605-OHP	25 11	5000 345	7% 197

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Premium Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series 4000, 5000 and 5005 reels are all-steel construction and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. Guide arm adjusts to two positions.

Enclosed Model

5435 ELP



Made in USA


Enclosed Models: Series 5000 E reels are the same as 5000 O reels except E Series reels are fully enclosed. To order, change the model number suffix letter O to E, Example: 5430 OHP becomes 5430 EHP. Add 8 lbs. to open reel weight. Enclosed version is only available for Series 5000 reels (size index 2 reels). Refer to reelcraft.com for dimensional information.



4625 OLP

5635 OLP

5650 OLP

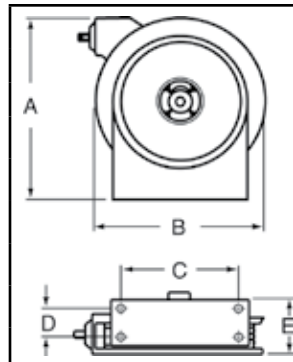

Dimensions - Size Index

No.	1	2	3	4
	in / mm	in / mm	in / mm	in / mm
A	12 ⁷ / ₈ 327	14 ¹ / ₂ 368	17 ¹ / ₂ 445	17 ¹ / ₂ 445
B	12 ⁵ / ₈ 321	13 ¹ / ₂ 343	16 ¹ / ₂ 419	16 ¹ / ₂ 419
C	8 203	9 ³ / ₄ 248	9 ³ / ₄ 248	9 ³ / ₄ 248
D	2 ¹ / ₂ 64	2 ¹ / ₂ 64	2 ¹ / ₂ 64	2 ¹ / ₂ 64
E	5 ³ / ₈ 137	6 152	6 152	7 178

Four 5/16" (8mm) diameter mounting holes.

NOTE: See operating instructions for optimum mounting configuration.

	Quiet latch with Hose	Ratchet latch with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Quiet latch without hose & bumper	Shipping Weight	Pressure	Size Index #
			lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar	
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)													
4420 OLP	-----		18 8	300 21	1/4 6	.475 12	1/4	3/8	20 6	4400 OLP	17 8	500 35	1
4425 OLP	B4425 OLP		19 9	300 21	1/4 6	.475 12	1/4	3/8	25 8	4400 OLP	17 8	500 35	1
4435 OLP	B4435 OLP		19 9	300 21	1/4 6	.475 12	1/4	3/8	35 11	4400 OLP	17 8	500 35	1
5450 OLP	B5450 OLP		26 12	300 21	1/4 6	.475 12	1/4	3/8	50 15	5400 OLP	20 9	500 35	2
4617 OLP	-----		19 9	300 21	3/8 10	.600 15	1/4	3/8	17 5	4600 OLP	17 8	500 35	1
4625 OLP	B4625 OLP		20 9	300 21	3/8 10	.600 15	1/4	3/8	25 8	4600 OLP	17 8	500 35	1
5635 OLP	B5635 OLP		25 11	300 21	3/8 10	.600 15	1/4	3/8	35 11	5600 OLP	21 10	500 35	2
5650 OLP	B5650 OLP		36 16	300 21	3/8 10	.600 15	1/4	3/8	50 15	5605 OLP	31 14	500 35	3
A5825 OLP	B5825 OLP		27 12	300 21	1/2 13	.750 19	1/2	3/8	25 8	A5800 OLP	22 10	500 35	2
A5835 OLP	B5835 OLP		39 18	300 21	1/2 13	.750 19	1/2	3/8	35 11	A5805 OLP	32 15	500 35	3
A5850 OLP	B5850 OLP		41 19	300 21	1/2 13	.750 19	1/2	3/8	50 15	A5806 OLP	35 16	500 35	4
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)													
5435 OMP	B5435 OMP		31 14	2750 190	1/4 6	.530 13	1/4	3/8	35 11	5400 OMP	23 10	3000 207	2
5630 OMP	B5630 OMP		31 14	2250 155	3/8 10	.710 18	3/8	3/8	30 9	5600 OMP	24 11	3000 207	2
A5825 OMP*	B5825 OMP*		34 15	2000 138	1/2 13	.850 22	1/2	3/8	25 8	A5800 OMP	24 11	3000 207	2
A5835 OMP	B5835 OMP		42 19	2000 138	1/2 13	.850 22	1/2	3/8	35 11	A5805 OMP	32 15	3000 207	3
High Pressure Grease Reels Maximum Temperature 210° F (99° C)													
5430 OHP	-----		30 14	5000 345	1/4 6	.580 15	1/4	1/4	30 9	5400 OHP	23 10	5000 345	2
5435 OHP	B5435 OHP		39 18	5000 345	1/4 6	.580 15	1/4	1/4	35 11	5405 OHP	33 15	5000 345	3
5625 OHP	B5625 OHP		32 15	4000 276	3/8 10	.730 19	1/4	1/4	25 8	5600 OHP	26 12	5000 345	2

Low pressure hose reels furnished standard with PVC hose. Compressed air hoses should not be converted to oxygen service - may cause explosion when O₂ mixes with fuel. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. ***Floor tank mount only - do not mount on ceiling.** High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Heavy Duty Hose Reels | Series 7000



Fry's Napa AutoCare Center, Columbia City, IN



7850 OLP

Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2", 3/4" I.D.

Series 7000 is very robust and ideal for the most demanding applications. The reel's base and guide arm are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The standard low pressure hose is for air or water service only. The basic reel without hose can be used for air, water or oil. Consult Reelcraft for other products and hoses. Guide arm adjusts to 3 positions.

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example 7900 OLP70.

	Dimensions			
	7000 O		7000 E	
	in / mm		in / mm	
A	20 ¹ / ₄	514	20 ³ / ₄	527
B	19	483	20 ³ / ₄	527
C	7 ¹³ / ₁₆	198	7 ¹³ / ₁₆	198
D	3 ⁷ / ₈	98	3 ⁷ / ₈	98
E	6 ¹ / ₈	146	6 ³ / ₄	171

Four 1/2" (12.7mm) diameter mounting holes.

Series 7000 E reels are the same as 7000 O reels except **E Series reels are fully enclosed**. To order, change the model number suffix letter O to E. Example, 7650 OHP becomes 7650 EHP. Add 17 lbs. to open reel weight.

Applications

- Industrial
- Automotive Service Centers
- Transmission Shops
- Fleet Maintenance Facilities
- Pneumatic Tools
- Aircraft Maintenance
- Tire Stores
- Agriculture
- Service Trucks
- Wash Down



Model with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Model without hose & bumper	Shipping Weight	Pressure
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)										
7650 OLP	43 20	300 21	3/8 10	.600 15	1/4	1/2	50 15	7600 OLP	40 18	500 35
7670 OLP	47 21	300 21	3/8 10	.600 15	1/4	1/2	70 22	7600 OLP	40 18	500 35
7850 OLP	47 21	300 21	1/2 13	.750 19	3/8	1/2	50 15	7800 OLP	41 19	500 35
7850 OLP121	47 21	300 21	1/2 13	.750 19	1/2	1/2	50 15	7800 OLP	41 19	500 35
7925 OLP	47 21	250 17	3/4 19	1.075 27	3/4	3/4	25 8	7900 OLP	44 20	500 35
F7925 OLP*	47 21	50 3	3/4 19	1.075 27	3/4	3/4	25 8	F7900 OLP	45 20	500 35
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)										
7650 OMP	55 25	2250 155	3/8 10	.710 18	3/8	1/2	50 15	7600 OMP	43 20	3000 207
7850 OMP	57 26	2000 138	1/2 13	.850 22	1/2	1/2	50 15	7800 OMP	43 20	3000 207
High Pressure Grease Reels Maximum Temperature 210° F (99° C)										
7450 OHP	55 25	5000 345	1/4 6	.580 15	1/4	1/2	50 15	7400 OHP	43 20	5000 345
7650 OHP	60 27	4000 276	3/8 10	.730 19	1/4	1/2	50 15	7600 OHP	46 21	5000 345

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. For hydraulic or other applications please consult manufacturer. *Series F7925 OLP supplied with fuel grade hose and UL330 and UCL approved hose with a 250 psi (17 bar) minimum burst.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Reelcraft's new compact dual pedestal Series DP5000 and DP7000 feature an innovative, non-welded, interlocking base. Independent testing to military standards has proven these reels stand up to heavy vibration and won't vibrate apart, which makes them especially strong and ideal for truck-mounted applications. Superbly engineered dual pedestal base and guide arm are structurally reinforced. All-steel construction and a baked-on powder coat finish combine to produce a rugged corrosion-resistant product suitable for a wide variety of heavy duty applications.


✓ Superior corrosion-resistance

A double adhesive gasket seals the spring case and steel parts are powder coated to provide excellent protection against weathering.

✓ Ease of operation

The latch pawl is mounted on the guide arm to prevent latch out at full extension and the high impact, nylon-filled guide rollers make retraction and pay out nearly effortless.


NEW!

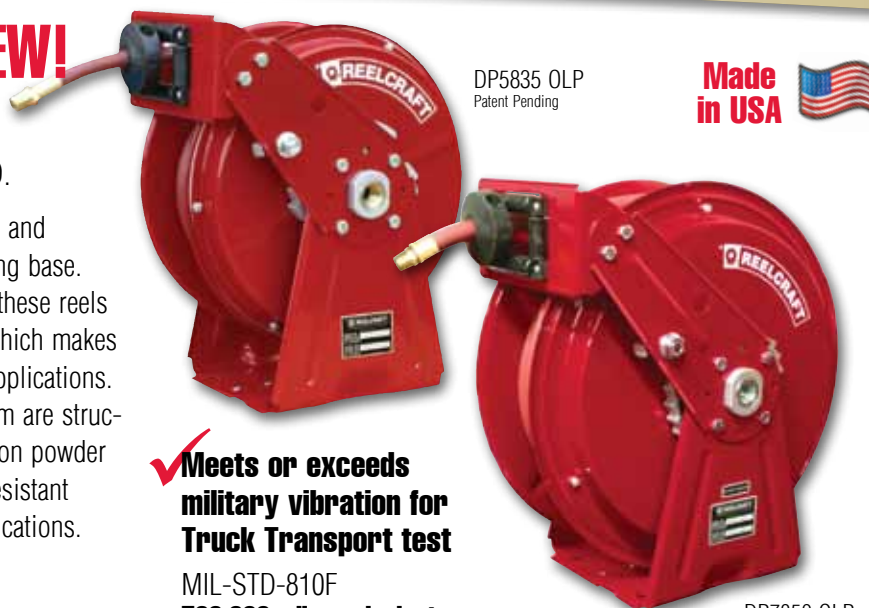

✓ **Meets or exceeds military vibration for Truck Transport test**

MIL-STD-810F
500,000 mile equivalent

DP7850 OLP
Patent Pending

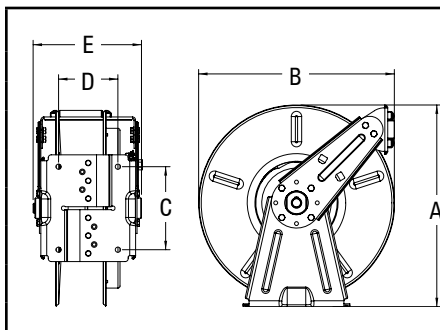

Dimensions - Size Index

No.	1	2	3	4
	in / mm	in / mm	in / mm	in / mm
A	16 ³ / ₈ 416	16 ³ / ₈ 416	17 432	17 432
B	14 ³ / ₈ 365	14 ³ / ₈ 365	16 ¹ / ₂ 419	16 ¹ / ₂ 419
C	7 178	7 178	7 178	7 178
D	4 102	5 127	4 102	5 127
E	8 203	9 229	8 203	9 229

Four 7/16" (11mm) diameter mounting holes.

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(M)NPTF Outlet in	(F)NPTF Inlet in	Hose Length ft / m	Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	Size Index #
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C) w/hose / 210° F (99° C) w/o hose											
DP5435 OLP	34 15	300 21	1/4 6	.475 12	1/4	1/2	35 11	DP5400 OLP	29 13	500 35	1
DP5450 OLP	37 17	300 21	1/4 6	.475 12	1/4	1/2	50 15	DP5400 OLP	29 13	500 35	1
DP7450 OLP	46 21	300 21	1/4 6	.475 12	1/4	1/2	50 15	DP7400 OLP	44 20	500 35	3
DP5635 OLP	41 19	300 21	3/8 10	.600 15	1/4	1/2	35 11	DP5600 OLP	37 17	500 35	1
DP5650 OLP	44 20	300 21	3/8 10	.600 15	1/4	1/2	50 15	DP5605 OLP	38 17	500 35	2
DP7650 OLP	50 23	300 21	3/8 10	.600 15	1/4	1/2	50 15	DP7600 OLP	44 20	500 35	3
DP5835 OLP	52 24	300 21	1/2 13	.750 19	3/8	1/2	35 11	DP5800 OLP	38 17	500 35	2
DP7850 OLP	53 24	300 21	1/2 13	.750 19	3/8	1/2	50 15	DP7800 OLP	45 20	500 35	4
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)											
DP7650 OMP	55 25	2250 155	3/8 10	.710 18	3/8	1/2	50 15	DP7600 OMP	45 20	3000 207	3
DP5835 OMP	54 24	2000 138	1/2 13	.850 22	1/2	1/2	35 11	DP5800 OMP	40 18	3000 207	2
DP7850 OMP	64 29	2000 138	1/2 13	.850 22	1/2	1/2	50 15	DP7800 OMP	45 20	3000 207	4
High Pressure Grease Reels Maximum Temperature 210° F (99° C)											
DP7450 OHP	59 27	5000 345	1/4 6	.580 15	1/4	1/2	50 15	DP7400 OHP	44 20	5000 345	3
DP5635 OHP	43 20	4000 276	3/8 10	.730 19	1/4	1/2	35 11	DP5600 OHP	40 18	5000 345	2
DP7650 OHP	65 29	4000 276	3/8 10	.730 19	1/4	1/2	50 15	DP7600 OHP	46 21	5000 345	3
Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T Two wire braid hose.											

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Made in USA 


Enclosed Model



D8650 ELP

D8650 OLP

Series D8000 E reels are the same as D8000 O reels except **these reels are fully enclosed**. To order, change the model number suffix letter O to E. Example, D8650 OLP becomes D8650 ELP. Add 17 pounds to open reel weight.



Dimensions

	D/E8000 O		D8000 E	
	in / mm		in / mm	
A	21 ¹ / ₈	537	21 ⁹ / ₁₆	548
B	19	483	20 ⁷ / ₈	530
C	7 ⁷ / ₈	200	7 ⁷ / ₈	200
D	3 ³ / ₄	95	3 ³ / ₄	98
E	9 ¹ / ₄	235	10 ¹ / ₂	267

Four 1/2" (12.7mm) diameter mounting holes.

Ultimate Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

The ultra duty aluminum cast base and arm of the Series D8000 and E8000 offers the highest rigidity among this class of hose reels. The guide arm is field-adjustable for floor, wall, ceiling, pit and truck mounting. The durable baked-on, powder-coat finish provides a high quality ultra-violet radiation (sunlight) weather and chip-resistant finish.

FEATURES

- ✓ Aluminum guide arm and base are cast from 40,000 P.S.I. tensile strength material with 7% elongation which assures ultimate shock resistance. Cast aluminum frame gives maximum strength with minimum payload weight.
- ✓ A special heavy, double adhesive sided spring case gasket protects the main spring from damage (failure) caused by water, dirt or other foreign matter entering the spring case.
- ✓ Guide arm is field adjustable for floor, wall, ceiling, pit and truck mounting.
- ✓ Full flow shaft and swivel.
- ✓ Reel springs are manufactured from the highest quality scale-less blue tempered steel.
- ✓ Individually coated components with a durable baked-on powder coat finish provides excellent high quality ultra violet radiation (sunlight) weather and chip-resistant finish.

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(M)NPTF Outlet	(F)NPTF Inlet	Hose Length		Model without hose & bumper	Shipping Weight		Pressure	
	lbs / kg		psi / bar		in / mm		in / mm		in	in	ft / m			lbs / kg		psi / bar	
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C) w/hose / 210° F (99° C) w/o hose																	
D8650 OLP	45	20	300	21	3/8	10	.600	15	1/4	1/2	50	15	D8600 OLP	40	18	500	35
D8670 OLP	47	21	300	21	3/8	10	.600	15	1/4	1/2	70	21	D8600 OLP	40	18	500	35
D8850 OLP	47	21	300	21	1/2	13	.750	19	3/8	1/2	50	15	D8800 OLP	41	19	500	35
E8850 OLP*	47	21	300	21	1/2	13	.750	19	3/8	1/2	50	15	E8800 OLP	41	19	500	35
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)																	
D8650 OMP	47	21	2250	155	3/8	10	.710	18	1/2	1/2	50	15	D8600 OMP	43	20	3000	207
D8840 OMP	53	24	2000	138	1/2	13	.850	22	1/2	1/2	40	12	D8800 OMP	43	20	3000	207
D8850 OMP	57	26	2000	138	1/2	13	.850	22	1/2	1/2	50	15	D8800 OMP	43	20	3000	207
E8850 OMP*	57	26	2000	138	1/2	13	.850	22	1/2	1/2	50	15	E8800 OMP	43	20	3000	207
High Pressure Grease Reels Maximum Temperature 210° F (99° C)																	
D8450 OHP	53	24	5000	345	1/4	6	.580	15	1/4	1/2	50	15	D8400 OHP	44	20	5000	345
D8650 OHP	60	27	4000	276	3/8	10	.730	19	1/4	1/2	50	15	D8600 OHP	44	20	5000	345
E8650 OHP*	60	27	4000	276	3/8	10	.730	19	1/4	1/2	50	15	E8600 OHP	44	20	5000	345

*Series E8000 models are for lubrication trucks. Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100R2T two wire braid hose.

Available Options

Optional Roller Guides
See page 47

Inlet Hose Assemblies
See page 49

Replacement Bumpers
See page 49

Replacement Hoses
See page 50

Heavy Duty Spring Retractable Reels

Air/Water/Oil/Grease - 3/8", 1/2", 3/4", 1" I.D.


Reelcraft's Series 80000 and D80000 spring retractable reels incorporate the most current design and manufacturing techniques to guarantee long life and trouble-free performance. All-steel construction and a baked-on powder coat finish combine to produce a rugged, corrosion-resistant product suitable for a wide variety of heavy duty applications. Series D80000 reels are also supplied with Reelcraft's ball-bearing style swivel.



82100 OLP

FEATURES

- ✓ Hose anti latch-out feature ensures hose retracts every time.
- ✓ Guide arm is field adjustable for wall, ceiling, or truck mounting positions.
- ✓ Dual pedestal base and guide arm design are structurally reinforced.
- ✓ Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- ✓ Containerized spring assembly provides safer and easier handling during maintenance.
- ✓ Two sealed ball bearings for smooth rotation of main shaft.

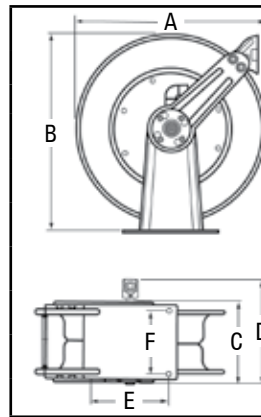

Dimensions - Size Index						
No.	1		2		3	
	in / mm		in / mm		in / mm	
A	24	610	24	610	24	610
B	25 ³ / ₈	645	25 ³ / ₈	645	25 ³ / ₈	645
C	8 ³ / ₈	213	9 ³ / ₈	238	9 ³ / ₈	238
D	10 ¹ / ₈	257	14 ¹ / ₄	362	15 ¹ / ₄	387
E	10	254	10 ¹ / ₂	267	10 ¹ / ₂	267
F	6	152	7 ⁷ / ₈	200	7 ⁷ / ₈	200

Four 1/2" (12.7mm) diameter mounting holes.

Model with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Model without hose & bumper	Shipping Weight	Pressure	Size Index #
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar	
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C) w/hose / 210° F (99° C) w/o hose											
81100 OLP	82 37	300 21	3/8 10	.600 15	3/8	1/2	100 30	81000 OLP	77 35	500 35	1
82075 OLP	87 39	300 21	1/2 13	.750 19	1/2	1/2	75 23	82000 OLP	82 37	500 35	1
82100 OLP	95 43	300 21	1/2 13	.750 19	1/2	1/2	100 30	82000 OLP	82 37	500 35	1
83050 OLP	88 40	250 17	3/4 19	1.075 27	3/4	3/4	50 15	83000 OLP	77 35	500 35	1
+F83050 OLP*	89 41	50 3	3/4 19	1.075 27	3/4	3/4	50 15	F83000 OLP	74 34	500 35	1
D83075 OLP	102 46	250 17	3/4 19	1.075 27	3/4	3/4	75 23	D83000 OLP	83 38	500 35	2
D84050 OLP	103 47	250 17	1 25	1.375 35	1	1	50 15	D84000 OLP	91 41	500 35	3
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)											
82075 OMP	101 46	2000 138	1/2 13	.850 22	1/2	1/2	75 23	82000 OMP	82 37	2000 138	1
83050 OMP	98 44	1250 86	3/4 19	1.188 30	3/4	3/4	50 15	83000 OMP	84 38	1500 104	1
High Pressure Grease Reels Maximum Temperature 210° F (99° C)											
81075 OHP	111 50	4000 276	3/8 10	.730 19	3/8	3/8	75 23	81000 OHP	85 39	5000 345	1
81100 OHP	127 58	4000 276	3/8 10	.730 19	3/8	3/8	100 30	81000 OHP	85 39	5000 345	1

+UL330 and ULC approved hose. 250 psi minimum burst. (17 Bar) / For all metric thread connections over 1/2" add the suffix number -70 to indicate BSPT threads - example 83050-OLP70. Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. Modification - Reels without hose can be modified to handle gasoline and diesel fuel, to order place prefix "F" before model number (F83000 OLP). *Model F83050 OLP equipped with fuel grade hose. High pressure reels furnished standard with SAE 100R2T two wire braid hose.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50





SD14035 OVP

NEW!

Spring Retractable Low Profile Reels Air/Water/Oil/Vacuum Recovery - 3/4", 1" I.D.


Series SD10000 hose reels are designed to facilitate larger diameter 3/4" and 1" hose up to 50 ft. They feature a high quality external drive spring and a heavy gauge all-bolted together frame. This is the most compact reel in its class, making it ideal for mounting in truck cabinets or other areas where space is limited.

Benefits

- **Compact** reel features extreme space saving design, ideal for applications with minimal space constraints.
- **Strength** reel is built with high quality industrial grade components for superior strength and design.

SPECIFICATIONS

- High impact UHMW guide rollers
- Corrosion resistant powder coat paint
- 1 3/8" solid main shaft
- 4 - 5/8" tie rods maintain reel integrity and provide added support
- Containerized external drive spring assembly is easily and safely serviced
- Ultra low profile design for mounting in cabinetry
- Ductile iron fluid path parts
- Stainless latch spring and widened aluminum ratchet/pawl
- Torsion spring for longer service life

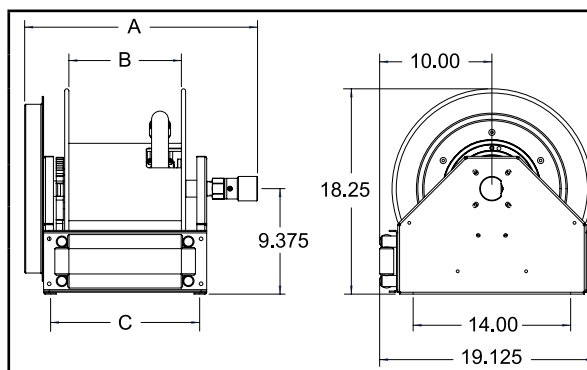

Size Index

No.	1	2
	in / mm	in / mm
A	18 ³ / ₄ 476	20 ³ / ₄ 527
B	8 203	10 254
C	11 ¹ / ₄ 286	13 ¹ / ₄ 337

Four 1/2" (12.7mm) mounting holes. All models are bottom wind unless otherwise specified. Additional bracket required for other guide arm positions.

Model with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Model without hose & bumper	Shipping Weight	Pressure	Size Index
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar	#
Low Pressure Air/Water Reels Maximum Temperature 210° F (99° C)											
SD13035 OLP	95 43	300 21	3/4 19	1.188 30	3/4	1	35 11	SD13000 OLP	85 39	500 35	1
SD13050 OLP	105 48	300 21	3/4 19	1.188 30	3/4	1	50 15	SD13000 OLP	85 39	500 35	1
SD14035 OLP	102 46	300 21	1 25	1.375 35	1	1	35 11	SD14000 OLP	85 39	500 35	1
SD14050 OLP	125 57	300 21	1 25	1.375 35	1	1	50 15	SD14005 OLP	92 42	500 35	2
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)											
SD13050 OMP	95 43	1250 86	3/4 19	1.188 30	3/4	1	50 15	SD13000 OMP	85 39	3000 207	1
Vacuum Recovery Reels Maximum Temperature 210° F (99° C)											
SD13035 OVP	95 43	28 Hg~300 psi	3/4 19	1.260 32	3/4	1	35 11	SD13000 OVP	85 39	28 Hg~300 psi	1
SD13050 OVP	105 48	28 Hg~300 psi	3/4 19	1.260 32	3/4	1	50 15	SD13000 OVP	85 39	28 Hg~300 psi	1
SD14035 OVP	102 46	28 Hg~250 psi	1 25	1.496 38	1	1	35 11	SD14000 OVP	85 39	28 Hg~300 psi	1
SD14050 OVP	125 57	28 Hg~250 psi	1 25	1.496 38	1	1	50 15	SD14005 OVP	92 42	28 Hg~300 psi	2

NOTE: Vacuum Recovery Reel capacities based on using SAE 100 R4 hose or equivalent. Minimum bend radius is 8", max O.D. 1.500".

Available Options

Optional Roller Guides
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Ultimate Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.










Series 9000 mobile base reels offer the greatest amount of stability for high volume air, water, diesel fuel and gasoline. Ideal for portable service trucks, permanent service or plant work areas. A durable baked-on powder coat finish produces a rugged corrosion resistant product suitable for a wide variety of heavy duty applications. Basic reels without hose will handle air, water or oil; consult Reelcraft for other applications.

Made

in USA



D9350 OLPBW

		Dimensions - Size Index					
No.		1		2		3	
		in / mm		in / mm		in / mm	
A		26 1/4	667	26 1/4	667	26 1/4	667
B		24 1/8	613	24 1/8	613	24 1/8	613
C		4 3/4	121	3 7/8	98	4 1/2	114
D		12	305	17 11/16	449	13 3/8	340
E		7 3/4	195	13 7/16	341	7 3/4	195
F		22 1/4	556	22 1/4	556	22 1/4	556
G		12 1/4	311	12 1/4	311	12 1/4	311
H		13 7/8	352	13 7/8	352	13 7/8	352
J		26 3/8	670	26 3/8	670	26 3/8	670
Four 1/4" (6mm) mounting holes.							

Hose Guide Roller Position



TW
RIGHT HAND INLET



BW
RIGHT HAND INLET



SW
LEFT HAND INLET

A suffix code (see diagram) must be added after the model number to specify desired position. Reels are shipped in the BW position unless specified otherwise. FF9500/9600 in BW only.

Model with Hose	Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Model without hose & bumper	Weight	Pressure	Size Index #
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar	
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)											
D9275 OLP	122 55	300 21	1/2 13	.750 19	1/2	1/2	75 23	D9200 OLP	115 52	500 35	1
D9299 OLP	127 58	300 21	1/2 13	.750 19	1/2	1/2	100 30	D9200 OLP	115 52	500 35	1
D9350 OLP	140 64	250 17	3/4 19	1.075 27	3/4	3/4	50 15	D9300 OLP	115 52	500 35	1
D9375 OLP	152 69	250 17	3/4 19	1.075 27	3/4	3/4	75 23	D9300 OLP	115 52	500 35	1
D9399 OLPBW	143 65	250 17	3/4 19	1.075 27	3/4	3/4	100 30	D9305 OLPBW	115 52	500 35	3
D9450 OLP	157 71	250 17	1 25	1.375 35	1	1	50 15	D9400 OLP	115 52	500 35	1
Not available with hose			1 1/4 32	1.750 44	1 1/4	1 1/2	50 15	FF9500 OLPBW	125 57	600 41	2
Not available with hose			1 1/2 38	2.000 51	1 1/2	1 1/2	50 15	FF9600 OLPBW	135 61	600 41	2
Medium Pressure Oil Reels Maximum Temperature 210° F (99° C)											
D9275 OMP	131 59	2000 138	1/2 13	.850 22	1/2	1/2	75 23	D9200 OMP	117 53	3000 207	1
D9350 OMP	142 64	1250 86	3/4 19	1.188 30	3/4	3/4	50 15	D9300 OMP	117 53	3000 207	1
High Pressure Grease Reels Maximum Temperature 210° F (99° C)											
D9175 OHP	153 69	4000 276	3/8 10	.730 19	1/2	3/8	75 23	D9100 OHP	118 54	5000 345	1
Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100R2T two wire braid hose. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example D9300 OLP70. FF9500 and FF9600 models will have BSPP threads. Note: To specify our heavy duty model, change prefix from D to E. Not available on FE9500 or FE9600. Modification - Reels without hose can be modified to handle gasoline and diesel fuel, to order place prefix "F" before model number - example (FF9300 OLP).											

Available Options

Optional Roller Guides
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Large Frame Hose Reels | Nordic Series 3100 / 4800

Twin hose models are available as standard.



Nordic Series 4800



Spring Driven Large Frame Reels

Nordic Series 3100 & 4800


1/2", 3/4", 1" or 1 1/2" Fluid Path for 1/2" through 2" I.D. Hose

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint.

Gooseneck: 1/2" up to 1" female/male NPT. **Series 3100** reels handle hose from 1/4" through 1" I.D. **Series 4830** reels handle hose from 1/2" through 1" I.D. Inlet is 1/2" up to 1" female/male NPT 90° swivel joint. Gooseneck is 1/2" up to 1" female/male NPT. **Series 4800** reels handle hose from 1" through 1 1/2" I.D. 2" straight victaulic x 1 1/2" NPT female inlet is standard. Gooseneck is 1" to 1 1/2" female/male NPT.

Roller position: You must specify roller position BW, SW or TW. If roller position is not specified, reels will be shipped with rollers in position BW, see page 15.

Dimensions Diagram

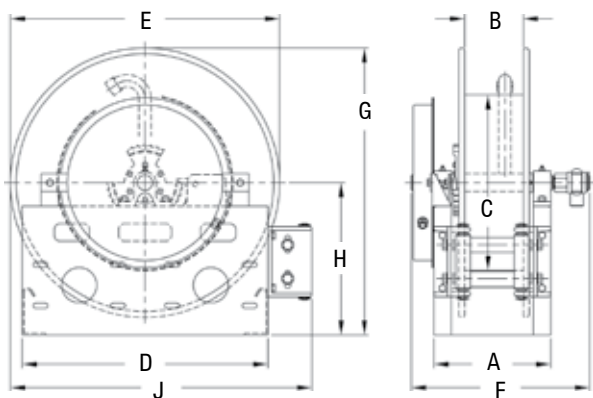

Series 3100 / 4830 product temperatures from -50° to +225° F and standard pressures to 3000 p.s.i. **Series 4800** product temperatures from -50° to + 225°F at standard pressures to 300 p.s.i. for 2" and 600 p.s.i. for 1 1/2" I.D. hose. Reels to operate at other temperatures or pressures can be furnished at extra cost. Consult manufacturer. The standard color for this series is red or gray.

Hose stop: A hose stop should be used to prevent damage to rollers and nozzles and to permit adjustment of free hose length. See description on page 49. Hose stops are available at extra cost.

Note: Other sizes and/or threads can be furnished for gooseneck when specified.

Hose I.D.	in mm	1/2 13	3/4 19	1 25	1 1/4 32	1 1/2 38	Specification - Hose Capacity and Reel Dimensions *20" (508mm) diameter drum on Model #4830-31-10 for 1/2" and 3/4" hose											
Hose O.D.	in mm	7/8 22	1 9/32 33	1 9/16 40	1 13/16 46	2 1/16 52												
Model	Hose Length						Est. Weight		A	B	C	D	E	F	G	H	J	
3101-19-4	ft	30	25	15			90 LB	in	9	4	11.25	21	19	15.5	22.5	13	25	
	m	9	8	5			41 KG	mm	229	102	286	533	483	394	572	330	635	
3101-23-4	ft	60	40	25			93 LB	in	9	4	11.25	21	23	15.5	24.5	13	26	
	m	18	12	8			42 KG	mm	229	102	286	533	584	394	622	330	660	
3101-23-6	ft	100	65	60			95 LB	in	11	6	11.25	21	23	17.5	24.5	13	26	
	m	30	20	18			43 KG	mm	279	152	286	533	584	445	622	330	660	
3101-23-8	ft	100	65	60			97 LB	in	13	8	11.25	21	23	19.5	24.5	13	26	
	m	30	20	18			44 KG	mm	330	203	286	533	584	495	622	330	660	
4830-31-5X	ft	75	75	65			122 LB	in	10.44	5.5	20	30	31	17	33	17.5	34.5	
	m	23	23	20			55 KG	mm	265	140	508	762	787	432	838	445	876	
4830-31-8	ft	80	80	90			125 LB	in	13.44	8	15	30	31	19.5	33	17.5	34.5	
	m	24	24	27			57 KG	mm	341	203	381	762	787	495	838	445	876	
4830-31-10	ft	*90	*100	100			128 LB	in	15.44	10	*15	30	31	21.5	33	17.5	34.5	
	m	*27	*30	30			58 KG	mm	392	254	*381	762	787	546	838	445	876	
4800-31-6	ft			70	50	40	122 LB	in	11.44	6	11.25	30	31	17	33	17.5	34.5	
	m			21	15	12	55 KG	mm	291	152	286	762	787	432	838	445	876	
4800-31-8	ft			75	75	50	125 LB	in	13.44	8	11.25	30	31	19	33	17.5	34.5	
	m			23	23	15	57 KG	mm	341	203	286	762	787	483	838	445	876	

Twin Hose, Spring Retractable Reels

Dual Hydraulic - 1/4", 3/8", 1/2" I.D.

Reelcraft's hydraulic reels are used for medium pressure dual hydraulic hose applications and are ideal for operating hydraulic cylinders, tools and equipment. High volume dual-body swivel for maximum product delivery (excluding the 80000). Series TH reels incorporate contemporary engineering and manufacturing techniques for trouble-free performance. Reels are all-steel construction and compact for applications with critical space requirements.

Applications


- Cranes
- Construction Equipment
- Hydraulic Tools
- Vehicle Extraction Tools
- Aerial Device
- Hydraulic Cylinders
- Tree Cutters
- Digger Derricks
- Railroad Maintenance Tools

Questions? We can help!

Our friendly customer service team is ready to help you with expert assistance. When you call us, you get a live voice and fast, friendly service.

FEATURES

- ✓ Constant tension or pos-i-latch spool mechanism
- ✓ All-steel construction
- ✓ Reels have a durable, abrasion-resistant, baked-on powder coat finish spring motor
- ✓ Compact design for critical space requirements

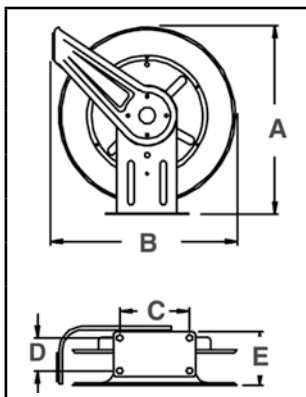

Dimensions - Size Index					
No.	1		2		3
	in / mm		in / mm		in / mm
A	14 1/2	368	20 1/4	514	25 3/8 645
B	13 1/2	343	19	483	24 610
C	9 3/4	248	7 7/8	200	10 254
D	2 1/2	64	3 7/8	98	6 152
E	6	152	7	178	13 330

5000 reels have four 5/16" (8mm) mounting holes. 7000 and 80000 reels have four 1/2" (12.7mm) mounting holes.



TH5425 OMP



TH7445 OMP

**Made
in USA**

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(M)NPT Outlet in	(F)NPT Inlet in	Hose Length ft / m	Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	Size Index #
Medium Pressure Hydraulic Hose Reels Maximum Temperature 210° F (99° C)											
TH5425 OMP	34 15	2000 138	1/4 6	.530 13	1/4	1/4	25 8	TH5400 OMP	24 11	3000 207	1
TH7445 OMP	60 27	2000 138	1/4 6	.530 13	1/4	1/4	45 14	TH7400 OMP	44 20	3000 207	2
THA7630 OMP	53 24	2000 138	3/8 10	.660 17	3/8	3/8	30 9	THA7600 OMP CA	44 20	3000 207	2
TH86050 OMP	99 45	2000 138	3/8 10	.710 18	3/8	3/8	50 15	TH86000 OMP	88 40	3000 207	3
TH88050 OMP	104 47	2000 138	1/2 13	.850 22	1/2	1/2	50 15	TH88000 OMP CA	88 40	3000 207	3

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50





FD83075 OLP

Spring Retractable Fuel Reels

F7000 - 3/4" I.D. / **FF9000** - 1 1/4", 1 1/2" I.D.

FE9000, FD9000 - 3/4", 1" I.D.

F80000, FD80000 - 3/4", 1" I.D.

FSD10000 - 3/4", 1" I.D.



Reelcraft's spring retractable fuel delivery reels, equipped with Viton seals, incorporate metal forms to insure the greatest possible strength and are ideal for mobile and permanent-mount applications. These rugged, corrosion-resistant reels are suitable for a wide variety of fuel applications including E85. Series F/FD/FE/FSD reels are all supplied with our ball-bearing style swivel.

Model with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Outlet	(F)NPTF Inlet	Hose Length	Model without hose & bumper	Shipping Weight	Pressure	Size Index Page	Size Index #
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m		lbs / kg	psi / bar		
Low Pressure Fuel Reels Maximum Temperature 150° F (65° C) w/hose / 210° F (99° C) w/o hose												
CA F7925 OLP	47 21	*50 3	3/4 19	1.188 30	3/4	3/4	25 8	CA F7900 OLP	45 20	500 35	10	----
CA F83050 OLP	89 40	*50 3	3/4 19	1.188 30	3/4	3/4	50 15	CA F83000 OLP	74 34	500 35	13	1
FD83075 OLP	115 52	*50 3	3/4 19	1.188 30	3/4	3/4	75 23	GS FD83000 OLP	82 37	500 35	13	2
FD84035 OLP	94 43	*50 3	1 25	1.500 38	1	1	35 11	CA FD84000 OLP	84 38	500 35	13	3
CA FD84050 OLP	115 52	*50 3	1 25	1.500 38	1	1	50 15	CA FD84000 OLP	84 38	500 35	13	3
FE9350 OLP	140 64	*50 3	3/4 19	1.188 30	3/4	3/4	50 15	FE9300 OLP	115 52	500 35	15	1
FE9450 OLP	157 71	*50 3	1 25	1.500 38	1	1	50 15	FE9400 OLP	115 52	500 35	15	1
CA FD9350 OLP	140 64	*50 3	3/4 19	1.188 30	3/4	3/4	50 15	FD9300 OLP	114 52	500 35	15	1
CA FD9450 OLP	157 71	*50 3	1 25	1.500 38	1	1	50 15	FD9400 OLP	113 51	500 35	15	1
Not available with hose			1 1/4 32	1.750 44	1 1/4	1 1/2	50 15	FF9500 OLPBW	125 57	600 41	15	2
Not available with hose			1 1/2 38	2.000 51	1 1/2	1 1/2	50 15	FF9600 OLPBW	135 61	600 41	15	2
FSD13035 OLP	102 46	*50 3	3/4 19	1.188 30	3/4	1	35 11	FSD13000 OLP	85 39	500 35	14	1
FSD13050 OLP	110 50	*50 3	3/4 19	1.188 30	3/4	1	50 15	FSD13000 OLP	85 39	500 35	14	1
FSD14035 OLP	105 48	*50 3	1 25	1.500 38	1	1	35 11	FSD14000 OLP	85 39	500 35	14	1
FSD14050 OLP	127 58	*50 3	1 25	1.500 38	1	1	50 15	FSD14005 OLP	92 42	500 35	14	2

***Models equipped with fuel grade hose. UL330 and ULC approved hose. 250 PSI minimum burst (17 Bar)** For all metric thread connections 1" and under add the suffix number -70 to indicate BSPT threads - example FD80000-OLP70. For all metric threads above 1" add -118 for BSPP threads. FF Models supplied with 1 1/2" inlet. Reel inlet on all models in this chart is NPTF (F) and matches hose I.D. Flow rates of fuel hose are reduced by 30% with addition of internal spring type bend restrictors. For example, flow rate of F7925 OLP with internal bend restrictors is 9.0 GPM at 40 psi; flow without internal bend restrictors is 13.0 GPM at 40 psi.

Spring Retractable Grounding Reels

Series G 3000

Static discharge reels are used to ground equipment operating in hazardous atmospheres. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reducing the chances of sparking and the potential for explosion.



GA3100 N

G 3050 Y

G 3050

Model	Cable Extended	Y	Clamp Rating	Max Temp	Cable Notes	Shipping Weight
	ft / m	ft / m		F / C		lbs / kg
G 3050	50 15	N/A	100 AMP	150 66	Single 7 x 7 stranded steel*	12 5
G 3050 Y	50 15	2 @ 15' (5)	100 AMP	150 66	35' (9.2m) plus dual 15' (4.6m) for Y* Total extension 50' (15m)	12 5
G 3050 N	50 15	N/A	100 AMP	150 66	Nylon covered cable**	12 5
GA3100 N	100 30	N/A	100 AMP	125 52	Hi-vis orange nylon covered cable**	16 7

*3/32" OD steel aircraft cable. DC resistance is approximately one ohm per 50 ft. of steel cable. **Nylon covered cable (1/8" O.D.). Dimensions: G 3050's = 8.62" x 3.35" x 8.81" (L x W x H); 4 mounting holes (3/8") 7 7/8" x 1 1/2". GA3100 N = 9.25" x 4.31" x 9 3/4" (L x W x H); 4 mounting holes (1/2") 7 7/8" x 1 1/8".

Stainless Steel Spring Retractable Reels

Air/Water/Oil - 3/8", 1/2", 3/4", 1" I.D.

Reelcraft's stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial-solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® O-rings.

Note: Standard latch parts are made from aluminium. Stainless latch parts are available as a standard option (except 80000 Series) by placing a -S at the end. Example: OLS-S. *Series 80000 and D80000 stainless reels have an aluminum fluid path and may not be suitable for all applications.

FEATURES

- ✓ Full-flow stainless steel shaft and swivel assures maximum product delivery.
Exception: Series 80000 - aluminum fluid path.
- ✓ Heavy duty brackets eliminate bending due to angular hose pull.
- ✓ Banded drive spring gives smooth automatic hose retrieval.
- ✓ Multi-position guide arm permits wall, floor, ceiling, pit or truck mounting.
- ✓ Nylon guide rollers reduce hose drag and abrasion.
- ✓ Pos-i-latch will maintain the desired working length of hose. Mechanism assures a positive latch of the hose.
- ✓ 7000 Series offers weatherproof gasketed spring motor, assures maximum service life.
- ✓ Vibration-proof self-locking fasteners assures assembly integrity.
- ✓ 304L grade of stainless steel.



Series 7000

General Use

Many versatile applications in corrosive or sanitary environments



Series D9000

Ultra Heavy Duty

Heavy duty dual pedestal for maximum strength

Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(F)NPTF Outlet in	(F)NPTF Inlet in	Hose Length ft / m	Size Index Page	Size Index #
Low and Medium Pressure Reels Maximum Temperature 210° F (99° C)									
CA 5600 OLS	22 10	500 35	3/8 10	.600 15	3/8	3/8	35 11	9	2
5600 OMS	24 11	3000 207	3/8 10	.710 18	3/8	3/8	30 9	9	2
QS 7800 OLS	41 19	500 35	1/2 13	.750 19	1/2	1/2	50 15	10	----
7600 OMS55	42 19	3000 207	3/8 10	.710 18	3/8	3/8	66 20	10	----
CA 7800 OMS	43 20	3000 207	1/2 13	.850 22	1/2	1/2	50 15	10	----
82000 OLS	81 37	500 35	1/2 13	.750 19	1/2	1/2	100 30	13	1
82000 OMS	83 38	1500 104	1/2 13	.850 22	1/2	1/2	75 23	13	1
83000 OLS	81 37	500 35	3/4 19	1.188 30	3/4	3/4	50 15	13	1
83000 OMS	83 38	1250 86	3/4 19	1.188 30	3/4	3/4	50 15	13	1
D83000 OLS	84 38	500 35	3/4 19	1.188 30	3/4	3/4	75 23	13	2
D84000 OLS	92 42	500 35	1 25	1.375 35	1	1	50 15	13	3
D9200 OLS	115 52	500 35	1/2 13	.750 19	1/2	1/2	100 30	15	1
D9300 OLS	116 53	500 35	3/4 19	1.188 30	3/4	3/4	75 23	15	1
D9400 OLS	117 53	500 35	1 25	1.375 35	1	1	50 15	15	1
D9200 OMS	118 54	3000 207	1/2 13	.850 22	1/2	1/2	75 23	15	1
D9300 OMS	118 54	3000 207	3/4 19	1.188 30	3/4	3/4	50 15	15	1

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example D83000 OLS70.

Model without Hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	(F)NPTF Outlet in	(F)NPTF Inlet in	I.D. O.D.	1/4 6	3/8 10	1/2 13	3/4 19	1 25	Size Index # (see pg. 24)
Manual Crank Medium Pressure Reels Maximum Temperature 210° F (99° C)											
CA HS18000 M	36 16	3000 207	1/2	1/2	Hose Length	425 130	300 91	200 61	---	---	1
HS28000 M	35 16	3000 207	1/2	1/2		625 191	450 137	300 91	---	---	2
HS19000 M	38 17	3000 207	3/4	3/4		425 130	300 91	200 61	75 23	---	1
HS29000 M	36 16	3000 207	3/4	3/4		625 191	450 137	300 91	125 38	---	2
HS37000 L	47 21	500 35	1" (M)NPTF	1		---	---	---	---	100 30	refer to reelcraft.com

Applications

- Restaurants
- Dairies
- Marinas
- Pharmaceutical
- Food Processing
- Ships

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49




Replacement Bumpers
See page 49



Replacement Hoses
See page 50



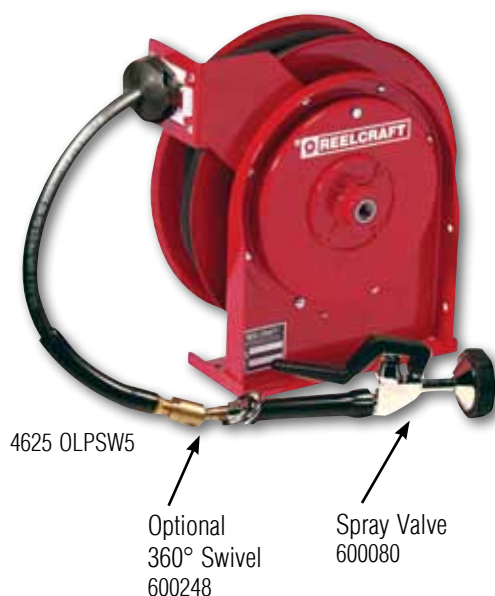

Spring Retractable Pre-Rinse Reels - 3/8" I.D.

Engineered for use in highly corrosive environments such as restaurants, institutions, and home and garden applications. Reelcraft's pre-rinse reels include a standard lever-operated spray valve. Available in stainless or powder-coat finish. Rated for hot water up to 210° F (99° C).

Hot water washdown and food prep

Commercial use, restaurants, schools, home/garden and more



A5835 OLBSW23

Spring Retractable Potable (Drinking) Water Reel - 1/2" I.D.

Designed for potable water systems, the A5835 OLBSW23 is suitable for use as a drinking water system component. Fluid path is stainless steel and CPVC material.

Drinking Water

Boats, RVs, buses and much more

PRE-RINSE REEL FEATURES


- ✓ Lever-operated spray valve is included
- ✓ Optional 360° rotating swivel (600248) offers 20 degrees of angular motion
- ✓ Push-Lok, field replaceable, hose-end fittings
- ✓ Reels can be mounted on the wall, ceiling, or under a counter, making water conveniently available
- ✓ Latching mechanism holds hose at desired length

Made in USA

POTABLE WATER REEL FEATURES

- ✓ Stainless steel, full flow shaft and PVC swivel
- ✓ Convenient fast hook-up and disconnect
- ✓ Drain and standard female garden hose outlet fitting are standard
- ✓ Maximum operating temperature 86° F (30° C)

Dimensions - Size Index

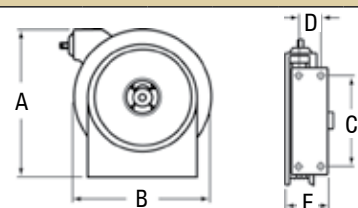

No.	1	2	3
	in / mm	in / mm	in / mm
A	12 ⁷ / ₈ 327	14 ¹ / ₂ 368	18 ¹ / ₂ 470
B	12 ⁵ / ₈ 321	13 ¹ / ₂ 343	15 381
C	8 203	9 ³ / ₄ 248	9 ³ / ₄ 248
D	2 ¹ / ₂ 64	2 ¹ / ₂ 64	2 ¹ / ₂ 64
E	5 ³ / ₈ 137	6 152	7 178

Four 5/16" (8mm) diameter mounting holes.

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(F)NPTF Inlet in	Hose Length ft / m	Size Index #
Pre-Rinse Hose Reels							
4625 OLPSW5	22 10	250 17	3/8 10	.640 16	3/8	25 8	1
5635 OLPSW5	27 12	250 17	3/8 10	.640 16	3/8	35 11	2
5635 ELPSW5	37 17	250 17	3/8 10	.640 16	3/8	35 11	3
Pre-Rinse Stainless Steel Hose Reels							
5635 OLSSW5	28 13	250 17	3/8 10	.640 16	3/8	35 11	2
5635 ELSSW5	38 17	250 17	3/8 10	.640 16	3/8	35 11	3
Potable (Drinking) Water Hose Reels Garden hose fitting 3/4" N/H threads (F)							
A5835 OLBSW23*	28 13	150 10	1/2 13	.781 20	1/2 male	35 11	2

*Maximum operating temperature is 86° F (30° C).

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Call customer service for special hoses



Spring Retractable Composite Reels

Air/Water/Chemical Delivery/Welding - 3/8", 1/2" I.D.

Series S reels are economical, lighter weight, easy to handle and meet the demands of a medium-duty industrial grade reel for continuous operation. Made of corrosion-proof, tough polypropylene, extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV rays. The design protects the hose and allows easy cleaning of both hose and reel. Wall, ceiling or floor mount.

A unique combination of composites and metals

The tough composite polypropylene outer case houses solid brass swivel and fluid path, a steel main shaft and high quality spring steel motor.

Corrosion-resistant, durable

The tough composite polypropylene outer case is UV stabilized and resistant to most acids and alkalis with excellent impact resistance. Suitable for general applications and environments where corrosion is an issue.

Positive latching system

The design of the latching system ensures positive latching in any mounting position.

Unique mounting

The bracket system supplied with the reel allows mounting in any position with the advantage of the swivel feature.

Lighter weight

Pound for pound the S Series offers distinct weight advantages due to the composite case construction.




Arbor Farms Nursery, Fort Wayne, Indiana



SGA3650 OLP

Series S reels are made in Australia.

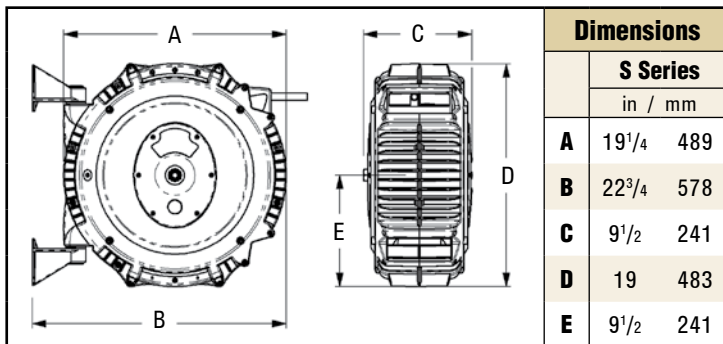

Applications

- ✓ Combination Air/Water
- ✓ Water Service
- ✓ Hot Water Wash
- ✓ Chemical Delivery
- ✓ Oxygen Acetylene

Suitable for all position mounting.

Model with Hose	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Hose Length
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m
Air* & Water* Hose Reels Working Temperature 150° F (65° C)							
SGA3650 OLP	21 10	232 16	3/8 10	.621 16	3/8	3/8	50 15
SGA3665 OLP	25 11	232 16	3/8 10	.621 16	3/8	3/8	65 20
SGA3850 OLP	23 10	232 16	1/2 13	.781 20	1/2	1/2	50 15
Water Hose Reel Garden-style hose end. Working Temperature 150° F (65° C)							
SWA3850 OLP	23 10	125 9	5/8 16	.750 19	3/4 NH	1/2	50 15
Hot Water Wash Reel Working Temperature 185° F (85° C). Working pressure is related to working temperature.							
SHA3850 OLP	22 10	232 16	1/2 13	.781 20	1/2	1/2	50 15
Chemical Delivery Hose Reel Working Temperature 140° F (60° C)							
SCA3850 OLP	22 10	232 16	1/2 13	.781 20	1/2	1/2	50 15
Oxygen/Acetylene Hose Reel Working Temperature 150° F (65° C)							
STW3450 OLP	27 12	300 21	1/4 6	.530 13	9/16"18(F)LH-RH	9/16"18(F)LH-RH	50 15

STW3450 OLP C dimension = 11.25" / 286mm. *NOTE: Air hose can be used for water on these models.

Available Options

Inlet Hose Assemblies
See page 49

Replacement Bumpers
See page 49

Replacement Hoses
See page 50

Spring driven

Pressure up to 5000 PSI
and up to 100 feet of hose

PW7650 OHP



Spring Retractable, Hand Crank, Motor Driven

Air/Water - 1/4", 3/8", 1/2" I.D.

Compact design and quality steel construction are incorporated into Reelcraft's full line of pressure wash reels, rated up to 5000 PSI. Series PW, H18006 and 30000 reels are able to carry 50 to 425 feet of tangle-free hose and are complete with a high pressure water swivel for maximum product delivery. The high pressure water swivel is designed to handle a broad range of pressures, temperatures and chemicals; perfect for agricultural/marine, equipment cleaning and pressure washing applications.



CA38106 M

Applications

Agricultural
Marine
Equipment cleaning
Pressure washing
Much more


Hand crank

Pressure up to 5000 PSI
and up to 425 feet of hose

Made
in USA



Dimensions - 7000 & 80000					
No.	1		2		
	in / mm		in / mm		
A	19	483	24	610	
B	20 ¹ / ₄	514	25 ³ / ₈	645	
C	7	178	8 ⁵ / ₁₆	211	
D	7	178	10 ¹ / ₂	267	
E	7 ⁷ / ₈	200	10	254	
F	3 ⁷ / ₈	98	6	152	
Four 1/2" (12.7mm) mounting holes.					

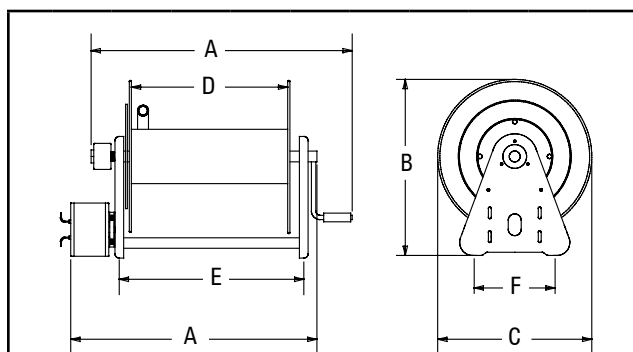

Dimensions - Series H & 30000										
No.	3		4		5		6		7	
	in / mm		in / mm		in / mm		in / mm		in / mm	
A	16 ¹ / ₄	413	19	483	25	635	19 ⁵ / ₈	499	25 ⁵ / ₈	651
B	20 ¹ / ₈	511	20 ¹ / ₄	514	20 ¹ / ₄	514	20 ¹ / ₄	514	20 ¹ / ₄	514
C	17 ³ / ₄	425	17 ³ / ₄	425	17 ³ / ₄	425	17 ³ / ₄	425	17 ³ / ₄	425
D	4 ⁷ / ₈	124	6	152	12	305	6	152	12	305
E	5 ³ / ₄	146	9 ³ / ₄	248	15 ³ / ₄	400	9 ³ / ₄	248	15 ³ / ₄	400
F	10	254	9	229	9	229	9	229	9	229

"A" is overall length. Four 1/2" (12.7mm) diameter mounting holes.

	in / mm		in / mm		in / mm		Shipping Weight	Size Index #
Hose I.D.	1/4 6		3/8 10		1/2 13			
Hose O.D.	.530 13		.730 19		.850 22			
Model without hose & bumper	Hose Length							
	ft / m		ft / m		ft / m		lbs / kg	
Spring Driven	Pressure 5000 psi / 345 bar							
PW7600 OHP	---	---	50 15	---	---	43 20	1	
PW7650 OHP*	---	---	50 15	---	---	60 27	1	
PW81000 OHP	---	---	100 30	---	---	86 39	2	
Hand Crank	Pressure 5000 psi / 345 bar							
H18006 M	150 46	100 30	---	---	31 14	3		
CA38106 M	200 61	140 43	100 30	41 19	4			
CA38112 M	425 130	300 91	200 61	46 21	5			
Electric Motor Driven	Pressure 5000 psi / 345 bar							
EA38106 M12D	200 61	140 43	100 30	63 29	6			
EA38112 M12D	425 130	300 91	200 61	71 32	7			
*Hose included - max temperature 212°F (100°C); Max temperature for models without hose 400°F (200°C). PSI rating based upon 2.4 to 1 safety factor.								

*Hose included - max temperature 212°F (100°C); Max temperature for models without hose 400°F (200°C). PSI rating based upon 2.4 to 1 safety factor.

Available
Options

Mounting
Brackets
See page 47



Inlet Hose
Assemblies
See page 49



Replacement
Bumpers
See page 49



Call customer
service for
special hoses



Light Industrial Hand Crank Hose Reels

Reelcraft's Series C hose reels are designed for lighter-duty applications that require longer lengths of hose. Hand crank with a balanced brass swivel and brass inlet, the Series C is the product of lighter weight components and forward-thinking design. Reels in this family benefit from a tough, corrosion-resistant powder coat paint. All reels feature a drag break to prevent de-spooling when reel is not in use. The Series C is an economical choice for storing and retrieving hose.

Series CU Air/Water - 3/8", 1/2" I.D.

Series CU features our most rigid base design and supports the reel on either side.

Series CT Air/Water/Pressure Wash - 3/8", 1/2" I.D.

The Series CT frame features a tubular design. The inlet is fed through the center of the tube frame, protecting the inlet hose and creating a cleaner look over all.

Series CM Pressure Wash - 3/8" I.D.

Series CM reels offer the greatest amount of flexibility by featuring a modular mounting platform. Reelcraft can configure custom mounts upon request or the customer may choose to supply their own.



CU6050LN

NEW!

CT6100HN

Dimensions - Series CT					
	5		6		
	in / mm		in / mm		
A	15 ² / ₃	397	15 ² / ₃	397	
B	15 ² / ₅	391	19 ⁴ / ₉	494	
C	13 ¹ / ₄	337	13 ¹ / ₄	337	
D	6	152	6	152	
E	3 ¹ / ₃	85	3 ¹ / ₃	85	
F	4 ¹ / ₄	108	4 ¹ / ₄	108	

Available Options


Inlet Hose Assemblies
See page 49



Replacement Hoses
See page 50




Dimensions - Series CU							
	1		2		3		4
	in / mm		in / mm		in / mm		in / mm
A	11 ¹ / ₂	292	11 ¹ / ₂	292	14 ³ / ₁₀	363	14 ³ / ₁₀ 363
B	16 ³ / ₄	425	20 ⁴ / ₅	528	16 ³ / ₄	425	20 ⁴ / ₅ 528
C	11	279	11	279	13 ¹ / ₄	337	13 ¹ / ₄ 337
D	4	102	4	102	4	102	6 152
E	9 ³ / ₈	238	13 ⁷ / ₈	352	9 ³ / ₁₀	237	13 ¹ / ₄ 337
F	6 ⁵ / ₈	168	11 ³ / ₈	289	6 ³ / ₅	168	10 ¹ / ₄ 260
G	1 ⁹ / ₁₀	49	1 ⁹ / ₁₀	49	1 ⁹ / ₁₀	49	2 ¹ / ₃ 59
H	3 ³ / ₈	86	3 ³ / ₈	86	3 ¹ / ₃	85	4 102

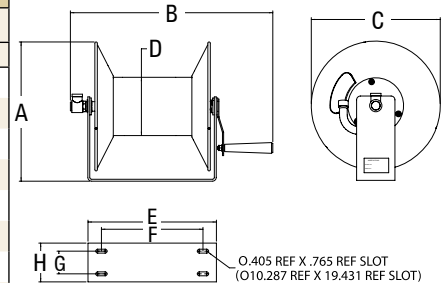

Model w/o Hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(F)NPTF Reel Outlet in	(F)NPTF Reel Inlet in	Hose Length ft / m	Size Index #
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)								
CU6050LN	11 5	300 21	3/8 10	.600 15	3/8	3/8	50 15	1
CU6100LN	16 7	300 21	3/8 10	.600 15	3/8	3/8	100 30	2
CU8050LN	13 6	300 21	1/2 13	.750 19	1/2	1/2	50 15	3
CU8100LN	20 9	300 21	1/2 13	.750 19	1/2	1/2	100 30	4
CT6050LN	13 6	300 21	3/8 10	.600 15	1/2	1/2	50 15	5
CT6100LN	17 7.5	300 21	3/8 10	.600 15	1/2	1/2	100 30	6
CT8050LN	13 6	300 21	1/2 13	.750 19	1/2	1/2	50 15	5
CT8100LN	17 7.5	300 21	1/2 13	.750 19	1/2	1/2	100 30	6
High Pressure Wash Reels Maximum Temperature 210° F (99° C)								
CT6050HN	13 6	5000 345	3/8 10	.730 19	3/8	1/2	50 15	5
CT6100HN	17 7.5	5000 345	3/8 10	.730 19	3/8	1/2	100 30	6
CM6050HN	14 6.5	5000 345	3/8 10	.730 19	3/8	1/2 (M)	50 15	7
CM6100HN	18 8	5000 345	3/8 10	.730 19	3/8	1/2 (M)	100 30	8

Reels are supplied without hose; assemblies will be quoted upon request.

Dimensions - Series CM			
	7		8
	in / mm		in / mm
A	13 ¹ / ₄	337	13 ¹ / ₄ 337
B	14 ³ / ₁₀	363	18 ³ / ₁₀ 465
C	16 ² / ₅	416	20 ² / ₅ 518
D	6	152	6 152
E	2 ¹ / ₂	64	2 ¹ / ₂ 64
F	3 ¹ / ₂	89	3 ¹ / ₂ 89



Medium Duty Hand Crank Reels

Series H - Air/Water/Oil/Grease - 3/8", 1/2", 3/4" I.D.

Series H is an economical reel designed for medium duty applications requiring long lengths of hose. It is equally suited for plant or field use such as turf care, pest control, steam cleaning and more. Shipped completely assembled, ready to install.


Made in USA 

Medium duty
H16000



Model without hose & bumper	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	(F)NPTF Reel Outlet in	(F)NPTF Reel Inlet in	Hose Length ft / m	Size Index #
Low Pressure Air/Water Hose Reels Max temperature 150°F (65°C)								
H16000	32 15	500 35	3/8 10	.600 15	3/8	3/8	300 91	1
H18000	34 15	1000 69	1/2 13	.750 19	1/2	1/2	200 61	1
H28005	34 15	1000 69	1/2 13	.750 19	1/2	1/2	300 91	4
H28000	37 17	1000 69	1/2 13	.750 19	1/2	1/2	300 91	2
H19000	33 15	1000 69	3/4 19	1.075 27	3/4	3/4	90 27	1
H29005	36 16	1000 69	3/4 19	1.075 27	3/4	3/4	100 30	3
H29000	41 19	1000 69	3/4 19	1.075 27	3/4	3/4	150 46	2
Medium Pressure Oil Hose Reels Max temperature 210°F (99°C)								
H16000 M	32 15	3000 207	3/8 10	.710 18	3/8	3/8	300 91	1
H18000 M	34 15	3000 207	1/2 13	.850 22	1/2	1/2	200 61	1
H19000 M	38 17	3000 207	3/4 19	1.188 30	3/4	3/4	90 27	1
H29000 M	35 16	3000 207	3/4 19	1.188 30	3/4	3/4	150 46	2
High Pressure Grease Hose Reels Max temperature 210°F (99°C)								
H16000 H	35 16	5000 345	3/8 10	.730 19	3/8	3/8	250 76	1

Reels are supplied without hose; assemblies will be quoted upon request. **CAUTION:** To prevent drum damage fully extend and pressurize hose and rewind on the reel. Stainless models available, see page 19.

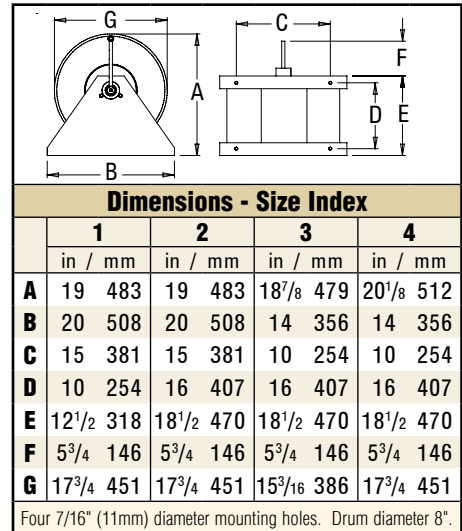

Motor Driven
EA33112 L12D

Heavy Duty Hand Crank and Motor Driven Reels

Series 30000 - Air/Water/Oil - 1/4", 1/2", 3/4", 1" I.D.

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue, full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life. Series 30000's vibration-proof, self-locking fasteners are ideal for industrial or field use such as turf care or pest control.

- ✓ Adjustable spool rotation drag that eliminates hose backlash
- ✓ Nickel-plated swivel with four O-ring options: AFLAS (standard), Buna, Viton® or -EPR* seals *Standard swivel
- ✓ Permanently lubricated dual main bearings
- ✓ Ball bearing swivel (excludes 1/2" low pressure models)
- ✓ Motor mounting at either end of reel
- ✓ All bolted construction - no welds
- ✓ Optional lock pin to prevent spool rotation when the reel is not in use, part #S600874
- ✓ Full flow shaft

Available Options

Pivot Brackets
See page 47



Hose Roller Guides
See page 47



Switches & Motors
See page 48



Hose Assemblies
See page 50



Hose I.D.	1/4"	3/8"	1/2"	3/4"	1"
	(6.4 mm)	(9.5 mm)	(12.7 mm)	(19.1 mm)	(25.4 mm)
Hose O.D.	.530"	.710"	.850"	1.188"	1.380"
	(13 mm)	(18 mm)	(22 mm)	(30 mm)	(35.0 mm)
"B" Width	Weight	Hose Capacity			
6"	38 lb	200'	140'	100'	50'
(152 mm)	(18 kg)	(61 m)	(43 m)	(30 m)	(15 m)
12"	46 lb	425'	300'	200'	100'
(305 mm)	(21 kg)	(130 m)	(91 m)	(61 m)	(30 m)
18"	54 lb	625'	450'	325'	175'
(457 mm)	(24 kg)	(191 m)	(137 m)	(99 m)	(54 m)
22"	58 lb	780'	550'	400'	225'
(559 mm)	(27 kg)	(238 m)	(168 m)	(122 m)	(69 m)
27"	66 lb	1000'	700'	500'	275'
(686 mm)	(30 kg)	(305 m)	(213 m)	(152 m)	(84 m)

Four 1/2 inch (12.7 mm) diameter mounting holes.



Hand Crank
CA32112 L



Hose Installation: The Series 30000 gooseneck is easily removed from the reel for hose attachment. Simply remove the four fasteners attaching gooseneck to reel, connect hose to the gooseneck and re-connect to the reel. NOTE: Do not discard the O-ring; insure that the O-ring is properly fitted into the grooves when replacing the gooseneck.

Note: Many more reel models available in addition to chart
Please contact manufacturer for details.

Model without hose & bumper	Shipping Weight	Pressure	Hose I.D.	Hose O.D.	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Capacity	A	B	C	D
	lbs / kg				psi / bar	in / mm					
Hand Crank Hose Reels Temperature operating range from -20° F (-29° C) to +250° F (121°C)											
CA32106 L	40 18	1000 69	1/2 13	.750 19	1/2	1/2	100 30	19 483	6 152	N/A	9¾ 248
CA32112 L	46 21	1000 69	1/2 13	.750 19	1/2	1/2	200 61	25 635	12 305	N/A	15¾ 400
CA32118 L	51 23	1000 69	1/2 13	.750 19	1/2	1/2	325 99	31 787	18 457	N/A	21¾ 552
CA32122 L	65 29	1000 69	1/2 13	.750 19	1/2	1/2	400 122	35 889	22 559	N/A	25¾ 654
CA32128 L	69 31	1000 69	1/2 13	.750 19	1/2	1/2	500 152	40 1016	27 686	N/A	30¾ 781
CA32106 M	42 19	3000 207	1/2 13	.850 22	1/2	1/2	100 30	19 483	6 152	N/A	9¾ 248
CA32112 M	46 21	3000 207	1/2 13	.850 22	1/2	1/2	200 61	25 635	12 305	N/A	15¾ 400
CA33106 L	41 19	1000 69	3/4 19	1.075 27	3/4	3/4	50 15	19 483	6 152	N/A	9¾ 248
CA33112 L	46 21	1000 69	3/4 19	1.075 27	3/4	3/4	100 30	25 635	12 305	N/A	15¾ 400
CA33118 L	51 23	1000 69	3/4 19	1.075 27	3/4	3/4	175 53	31 787	18 457	N/A	21¾ 552
CA33112 M	47 21	3000 207	3/4 19	1.188 30	3/4	3/4	100 30	25 635	12 305	N/A	15¾ 400
CA33118 M	51 23	3000 207	3/4 19	1.188 30	3/4	3/4	175 53	31 787	18 457	N/A	21¾ 552
CA37118 L*	54 24	300 21	1 25	1.375 35	1 (M)	1 (M)	100 30	31 787	18 457	N/A	21¾ 552
CA37122 L*	61 28	300 21	1 25	1.375 35	1 (M)	1 (M)	150 46	35 889	22 559	N/A	25¾ 654
CA37128 L*	65 29	300 21	1 25	1.375 35	1 (M)	1 (M)	175 53	40 1016	27 686	N/A	30¾ 781
Bevel Crank Hose Reels											
BA36112 L	57 26	200 14	1/4 6	Twin Welding	1/4	1/4	250 76	25 635	12 305	N/A	15¾ 400
BA34112 M	54 24	3000 207	1/2 13	Twin Hydraulic	1/2	1/2	100 30	25 635	12 305	N/A	15¾ 400
Electric Motor Driven Hose Reels Temperature operating range from -20° F (-29° C) to +250° F (121°C)											
EA32106 L10A	61 28	1000 69	1/2 13	.750 19	1/2	1/2	100 30	N/A	6 152	19⅝ 498	9¾ 248
EA32112 L12D	64 29	1000 69	1/2 13	.750 19	1/2	1/2	200 61	N/A	12 305	23⅝ 600	15¾ 400
EA32118 L12D	68 31	1000 69	1/2 13	.750 19	1/2	1/2	325 99	N/A	18 457	29⅝ 752	21¾ 552
EA33112 L12D	68 31	1000 69	3/4 19	1.075 27	3/4	3/4	100 30	N/A	12 305	23⅝ 600	15¾ 400
EA33118 L12D	68 31	1000 69	3/4 19	1.075 27	3/4	3/4	175 53	N/A	18 457	29⅝ 752	21¾ 552
EA33112 M12D	71 32	3000 207	3/4 19	1.188 30	3/4	3/4	100 30	N/A	12 305	23⅝ 600	15¾ 400
EA33128 M12D	91 41	3000 207	3/4 19	1.188 30	3/4	3/4	275 84	N/A	27 686	38⅝ 981	30¾ 781
EA33112 M24D	71 32	3000 207	3/4 19	1.188 30	3/4	3/4	100 30	N/A	12 305	23⅝ 600	15¾ 400
EA37118 L12D*	71 32	300 21	1 25	1.375 35	1	1 (M)	100 30	N/A	18 457	31 787	21¾ 552
Air Motor Driven Hose Reels Filter, regulator, lubricator required. Temperature operating range from -20° F (-29° C) to +250° F (121°C)											
AA32112 L4A	62 28	1000 69	1/2 13	.750 19	1/2	1/2	200 61	N/A	12 305	23¼ 591	15¾ 400
AA33106 L4A	59 27	1000 69	3/4 19	1.075 27	3/4	3/4	50 15	N/A	6 152	17¼ 438	9¾ 248
AA33112 L6A	68 31	1000 69	3/4 19	1.075 27	3/4	3/4	100 30	N/A	12 305	23¼ 591	15¾ 400
All Series 30000 reels are supplied without hose. Assemblies quoted upon request. *Series 37000 reels do not have a gooseneck. CAUTION: To prevent drum damage, fully extend and pressurize hose and rewind on the reel. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70											

All Series 30000 reels are supplied without hose. Assemblies quoted upon request. *Series 37000 reels do not have a gooseneck. **CAUTION:** To prevent drum damage, fully extend and pressurize hose and rewind on the reel. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70.

Portable Hose Reel and Cart



Hose Reel and Cart Package
600968

Hose Reel and Cart Packages	
Package	Items Included
600965	12" hand crank hose reel (CA32112 L); 12" hand cart with pneumatic tires (600741-1); 10' inlet hose (600962)
600966	12" hand crank hose reel (CA32112 L); 12" hand cart with semi-pneumatic tires (600741-2); 10' inlet hose (600962)
600967	12" hand crank hose reel (CA33112 L); 12" hand cart with pneumatic tires (600741-1); 10' inlet hose (600963)
600968	18" hand crank hose reel (CA37118 L); 18" hand cart with pneumatic tires (600885-1); 10' inlet hose (S600829-10)

Additional Accessories

Battery box (battery not included): S600812

Battery cable connector: 600814

Chain guard: S600518

Hose: 1" ID x 100', 1" NPT x 1" NPSH: 600829-100

Hose: 3/4" ID x 150', 3/4" NPT x 1" NPSH: 601044-150


Inlet hose 1" ID x 10', 1" NPT x 1" NPSH: S600829-10

Operating switch: S600808

Made in USA



600965

	Cart Size							
	12		305		18		457	
	in		/ mm		in		/ mm	
	A		Adjustable*					
	B		23¾	603	28¾		730	
C		18¼	464	18¼		464		

*Handle height of cart is adjustable to 35.625", 38.625", 41.5" or 44.5". Eight 5/16" (8mm) diameter mounting holes.


*Handle height of cart is adjustable to 35.625", 38.625", 41.5" or 44.5". Eight 5/16" (8mm) diameter mounting holes.

Hose Reel and Trailer

Made in USA



Reelcraft's rugged, self-contained hose reel trailer easily attaches to most off-road vehicles or carts and is pre-drilled 12" or 18" for Series 30000 hose reels. Reels hold up to 150' of 3/4" I.D. or 100' of 1" I.D. water hose. Makes spot watering easier, quicker and more convenient.

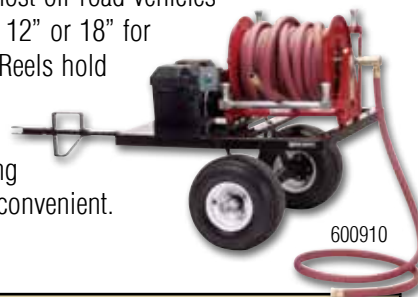


600910

Hose Reel and Trailer Packages	
Package	Items Included
600911	Trailer (600810); Hand rewind hose reel (CA37118 L); 10' lead hose (S600829-10); Roller Bracket, top wind (602133-3)
600910	Trailer (600810); 12V DC Motor driven hose reel (EA37118 L12D); Switch, complete (S600808); Battery box, battery not included (S600812); Chain guard (600518); Roller bracket, top wind (602133-3); Roller bracket, bottom wind (S602132-3); 10' lead hose with 1" I.D. (600829-10)
600810	Trailer only - does not include hose or reel. Reels designed for trailer include motor driven # EA37118 L12D and hand crank #CA37118L. Trailer weight 154 lbs / 70kg.

Hose Reel and Trailer Package
600910



Trailer Dimensions

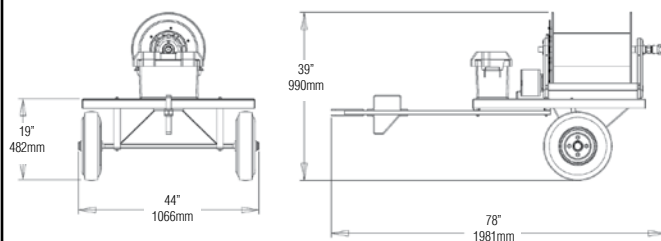

Trailer designed for off-road use only, not for passenger transport. Maximum weight capacity 400 pounds. Maximum speed 15 miles per hour. Trailer, reel and accessories sold separately.



Heavy Duty Large Frame Reels

Nordic™ Series 1200

1" Fluid Path for 1/2" through 1" I.D. Hose


Rewind: Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor. Crank is not supplied on power rewind models. A pin lock assembly is optional on manual rewind reels. A 3/8" pitch chain is standard.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2", 3/4", 1" female NPT. Other sizes and/or threads, including garden hose thread, can be furnished when specified.

The standard color for this series is red.

NEW!

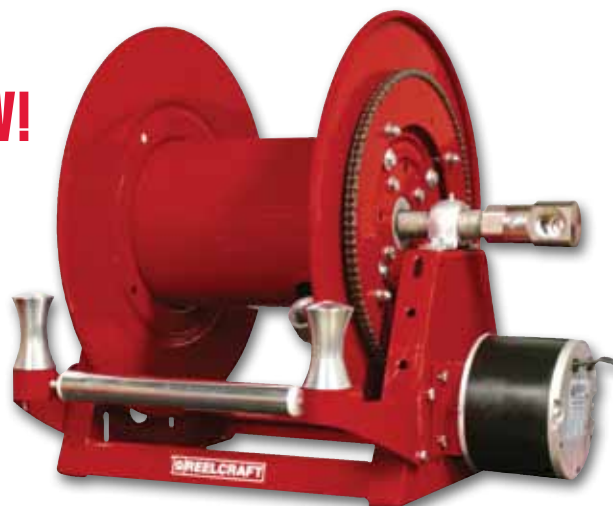

Nordic Series 1200


Shown with optional three-way roller bracket.

Nonexplosion-proof motor is standard "E" (pictured). Explosion proof (EP) motor is available upon request.

Made in USA

Product temperatures range from -20° to +225°F and standard pressures to 3000 PSI. Other temperatures or pressures can be furnished at extra cost; consult manufacturer.

Dimensions Diagram

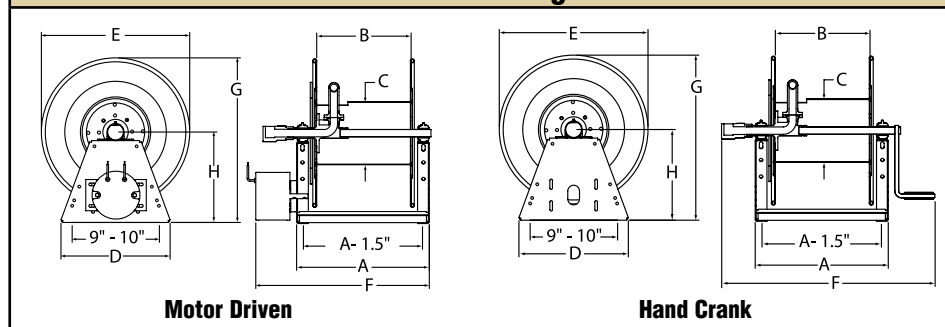

Hose I.D.	in mm	1/2 12.7	3/4 19.1	1 25.4	Specification - Hose Capacity and Reel Dimensions															
Hose O.D.	in mm	0.845 21.5	1.18 30	1.4 35.6	KEY: CRK = hand crank; "E" = nonexplosion-proof electric motor; EP = explosion-proof motor; AIR = air moter; BEVEL = bevel crank															
Model	Hose Length				Weight Crank*	Weight Motor*	Weight Bevel*		A	B	C	D	E	F CRK	F "E"	F EP	F AIR	F BEVEL	G	H
1200-19-6	ft	100	50	35	41 LB	58 LB	48 LB	in	11	6	8	14	19	22	16.5	18.5	16	24	21.1	11.6
	m	30	15	11	19 KG	26 KG	22 KG	mm	279	152	203	356	483	559	419	470	406	610	536	295
1200-19-12	ft	200	100	70	43 LB	60 LB	50 LB	in	17	12	8	14	19	28	22.5	24.5	22	30	21.1	11.6
	m	61	30	21	20 KG	27 KG	23 KG	mm	432	305	203	356	483	711	572	622	559	762	536	295
1200-19-18	ft	300	150	105	44 LB	61 LB	51 LB	in	23	18	8	14	19	34	28.5	30.5	28	36	21.1	11.6
	m	91	46	32	20 KG	28 KG	23 KG	mm	584	457	203	356	483	864	724	775	711	914	536	295
1200-19-22	ft	365	180	125	45 LB	62 LB	52 LB	in	27	22	8	14	19	38	32.5	34.5	32	40	21.1	11.6
	m	111	55	38	20 KG	28 KG	24 KG	mm	686	559	203	356	483	965	826	876	813	1016	536	295
1200-19-28	ft	465	230	160	46 LB	63 LB	53 LB	in	33	28	8	14	19	44	38.5	40.5	38	46	21.1	11.6
	m	142	70	49	21 KG	29 KG	24 KG	mm	838	711	203	356	483	1118	978	1029	965	1168	536	295
1200-23-6	ft	150	75	50	49 LB	66 LB	56 LB	in	11	6	11.25	15.25	23	22	16.5	18.5	16	24	25.1	13.6
	m	46	23	15	22 KG	30 KG	25 KG	mm	279	152	286	387	584	559	419	470	406	610	638	345
1200-23-12	ft	300	150	100	51 LB	68 LB	58 LB	in	17	12	11.25	15.25	23	28	22.5	24.5	22	30	25.1	13.6
	m	91	46	30	23 KG	31 KG	26 KG	mm	432	305	286	387	584	711	572	622	559	762	638	345
1200-23-18	ft	450	225	150	52 LB	69 LB	59 LB	in	23	18	11.25	15.25	23	34	28.5	30.5	28	36	25.1	13.6
	m	137	69	46	24 KG	31 KG	27 KG	mm	584	457	286	387	584	864	724	775	711	914	638	345
1200-23-22	ft	550	275	180	53 LB	70 LB	60 LB	in	27	22	11.25	15.25	23	38	32.5	34.5	32	40	25.1	13.6
	m	168	84	55	24 KG	32 KG	27 KG	mm	686	559	286	387	584	965	826	876	813	1016	638	345
1200-23-28	ft	700	350	230	54 LB	71 LB	61 LB	in	33	28	11.25	15.25	23	44	38.5	40.5	38	46	25.1	13.6
	m	213	107	70	24 KG	32 KG	28 KG	mm	838	711	286	387	584	1118	978	1029	965	1168	638	345

*Estimated weight on carbon steel frame. Refer to page 28 to build a complete model number.

Large Frame Reels | Nordic Heavy Duty Solutions

Reelcraft's Engineered Product Solutions

Full Flow Design

The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

✓ **Meets or Exceeds Military Vibration for Truck Transport test.**

MIL-STD-810F
500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized

The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

Nordic Series

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Inlet/Outlet Thread	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code
E 12 VDC	1200	19	6"-36" in 2" increments	50 1/2"	FM Female In/ Male Out	NP NPT	A Aluminum	LP 0-600	1 Straight	1 Left Hand Top Wind	R Red
NJ 24 VDC	2400	21		75 3/4"		BP BSPP	D Ductile Iron	1K 600-1000	2 90 Degree	2 Left Hand Bottom Wind	B Black
EP *12 VDC Exp	3900	23		10 1"	FF Female In/Out	BT BSPT	S Stainless	3K 1000-3000	5 1" LPG	3 Right Hand Top Wind	W White
EA *115 VAC Exp	3700	25		12 1 1/4"			B Bronze	5K 3001-5000	6 1 1/2" LPG	4 Right Hand Bottom Wind	G Grey
EX *230 VAC Exp	5900	28		15 1 1/2"	MF Male In/ Female Out			6K 5001-6000			S Silver
EJ *24 VDC Exp		31		20 2"				10K 10,000			
HD Hydraulic		36		25 2 1/2"	VM Victaulic In/ Male Out			15K 15,000			
AF 1 1/2 HP Air		39		30 3"							
AR 4 HP Air		46		40 4"	VF Victaulic In/ Female Out						
BC Bevel Crank											
HC Hand Crank											
S Storage											
CR Cable Reel											
*Exp=Explosion proof motor											
Material Options/ Drive Size											
1/2" Pitch Chain	##5										
5/8" Pitch Chain	##6										
3/4" Pitch Chain	##7										
Gear Driven	##9										
Alum. Frame/Spool	##5#										
304 S.S. Frame/Spool	##9#										
316 S.S. Frame/Spool	##8#										
Sewer Cleaning Reel	##15										
Twin Hose	####T										

Part No. Example: EP3900-23-28-15FFNPALP21-R00

EP(12VDC Electric Explosion Proof Motor)

3900(Series 3900 Hose Reel)

-23(23" Head Dia.) -28(28" Drum Length)

-15(1-1/2" Thread Size) FF(Female In/Out Thread Type)

NP(NPT Thread Style) A(Aluminum Fluid Path)

LP(0-600 PSI) 2(90° Inlet)

1(Left Hand Top Wind Fluid Path Location/Direction)

R(Red)

NOTE: Not all options available in every combination. Please contact manufacturer for price and availability.

Additional Options

Idler
Chain Guard
Roller Bracket (Top)
Roller Bracket (Bottom)
Inboard Motor
Brake
Auxiliary Bevel Crank
Hose Boss (Guide)
Junction Box
Explosion Proof Switch
Solenoid
Circuit Breaker
Control Valve

Heavy Duty Large Frame Reels Nordic Series 2400

1/2", 3/4" or 1" Fluid Path for 1/2" through 1" I.D. Hose

Rewind: Gear-drive rewind (new) or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2" up to 1" female/male NPT. Other sizes and/or threads, including male NST and male garden hose thread, can be furnished when specified.

Product temperatures from -20° to +225°F and standard pressures to 3000 p.s.i. Reels to operate at other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. ADD 12" to E dimension when crank is in rewind position.

NEW!
Gear drive
option




**1/2" pitch chain
now standard**

Shown with optional
bevel crank.

**Made
in USA**


Dimensions Diagram

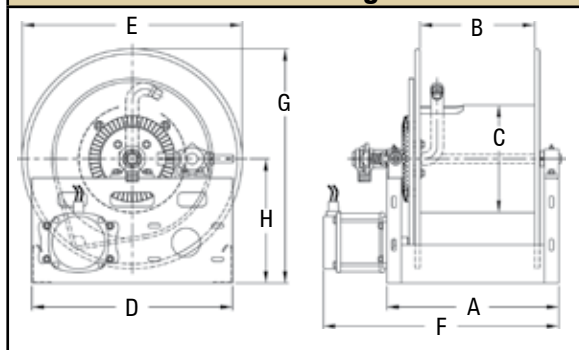

Fire Service / Booster Reels

The **aluminum Series 2450** reel for booster hose is corrosion-resistant and weighs up to 50% less than standard steel booster reels. Features include an aluminum spool and frame assembly, plated steel fluid path and plated sprocket and fasteners. **No painting or finishing is required.**

Nordic Series 2450

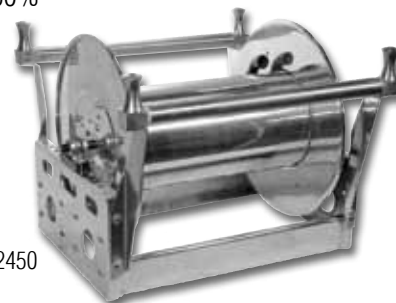

Hose I.D.	in mm	1/2 13	3/4 19	1 25	Specification - Hose Capacity and Reel Dimensions															
Hose O.D.	in mm	.875 22	1.281 33	1.563 40	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor															
Model	Hose Length (other std. lengths available)				Est. Weight		A	B	C	D	E CRK	E ELC	E AIR	E HYD	F CRK	F ELC	F AIR	F HYD	G	H
2400-19-16	ft m	200 61	100 30	50 15	70 LB 32 KG	in mm	22 559	16 406	11.25 286	21 533	21 533	21 533	21 533	26 660	27 737	28 711	28 711	22.5 572	13 330	
2400-23-14	ft m	315 96	150 46	100 30	74 LB 34 KG	in mm	20 508	14 356	11.25 286	21 533	23 584	23 584	23 584	24 610	27 686	26 660	26 660	24.5 622	13 330	
2400-23-18	ft m	485 148	240 73	150 46	78 LB 35 KG	in mm	24 610	18 457	11.25 286	21 533	23 584	23 584	23 584	28 711	31 787	30 762	30 762	24.5 622	13 330	
2400-23-20	ft m	535 163	260 79	165 50	80 LB 36 KG	in mm	26 660	20 508	11.25 286	21 533	23 584	23 584	23 584	30 762	33 838	32 813	32 813	24.5 622	13 330	
2400-23-24	ft m	625 191	300 91	200 61	84 LB 38 KG	in mm	30 762	24 610	11.25 286	21 533	23 584	23 584	23 584	34 864	37 940	36 914	36 914	24.5 622	13 330	
2400-25-8	ft m	235 72	125 38	60 18	72 LB 33 KG	in mm	14 356	8 203	11.25 286	21 533	25 635	25 635	25 635	18 457	21 533	20 508	20 508	26.5 673	14 356	
2400-25-14	ft m	450 137	225 69	110 34	74 LB 34 KG	in mm	20 508	14 356	11.25 286	21 533	25 635	25 635	25 635	24 610	27 686	26 660	26 660	26.5 673	14 356	
2400-31-8	ft m	435 133	185 56	125 38	74 LB 34 KG	in mm	14 356	8 203	11.25 286	24 610	31 787	31 787	31 787	18 457	21 533	20 508	20 508	32.5 826	17 432	
2400-31-10	ft m	540 165	235 72	165 50	76 LB 34 KG	in mm	16 406	10 254	11.25 286	24 610	31 787	31 787	31 787	20 508	23 584	22 559	22 559	32.5 826	17 432	
2400-31-16	ft m	900 274	400 122	300 91	80 LB 36 KG	in mm	22 559	16 406	11.25 286	24 610	31 787	31 787	31 787	26 660	29 737	28 711	28 711	32.5 826	17 432	

Refer to page 28 to build a complete model number. Refer to chart on page 31 for weight adders.

Modular Large Frame Reels


Series 40 - 1", 1¼", 1½" I.D.

Flexible Configurations

- ✓ Standard straight ball bearing swivel joint with female NPT threads and 2" victaulic groove. 90° swivel available, no extra charge.
- ✓ Hand crank, bevel crank, 12 VDC gear and chain drive rewind.
- ✓ Also available as standard, explosion proof 12VDC, 115 AC, hydraulic and pneumatic motor.
- ✓ Powder coated steel flanges included, aluminum also available as standard.
- ✓ Open spool spacer allows for easy access to reversible goose neck and open spool design allows for hose flexing under pressure without spool distortion.
- ✓ Plumbing and motor shown on left side; however, any configuration is available as a standard order.
- ✓ Standard colors are powder coat red with black frame. Other colors available upon request.
- ✓ Max pressure: 600 psi. Standard seals maximum temperature 174° F (79° C) and minimum temperature -20° F (-29° C). Extreme temperature seals maximum temperature 400° F (204° C) and minimum temperature -50° F (-45° C).
- ✓ Chain/gear guard is a recommended option, sold separately.

Shown with optional accessories: hose and roller bracket sold separately.

Straight swivel is standard on Series 40 reels. 90° swivel (pictured) available upon request.

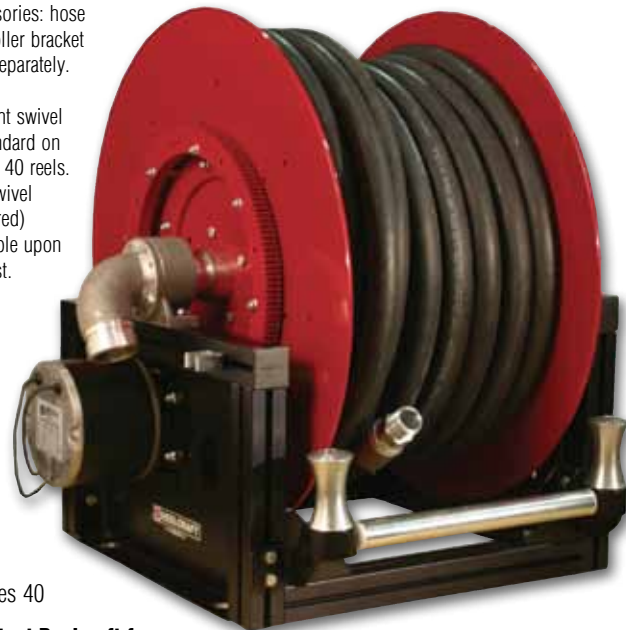

Series 40

Contact Reelcraft for guard, switch and roller brackets.

Made in USA

Also available in standard drive types:

Explosion proof
12VDC
24VDC
115VAC

Pneumatic Motor
Hydraulic Motor
Auxiliary Bevel Crank


Part Number Options 4□1131□□1LC

Hose ID:

- 1 = 1" hose
- 2 = 1 ¼" hose
- 3 = 1 ½" hose

Drive Type:

- CG = Hand Crank
- BG = Bevel Crank (only)
- DH = 12VDC, Gear Drive
- EH = 12VDC, Chain Drive

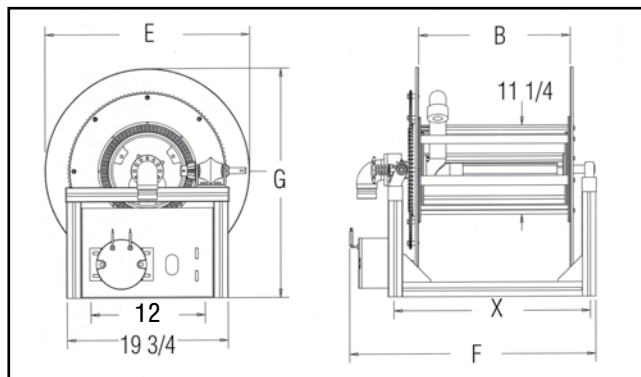

Hose Capacity	Series 41		Series 42		Series 43													
	in / mm		in / mm		in / mm													
Hose I.D.	1	25	1¼	32	1½	38	Dimensions											
Hose O.D.	1.563	40	1.813	46	2.063	52	KEY: Bevel = bevel crank; Electric = electric motor											
Model	Hose Length						B		E		F Bevel		F Electric		G		X	
	ft / m		ft / m		ft / m		in / mm		in / mm		in / mm		in / mm		in / mm		in / mm	
A4□1131□□1LC	80	24	50	15	---	---	13	330	21	533	23.75	603	25.75	654	24	610	18.75	476
A4□2081□□1LC	80	24	50	15	---	---	8	203	25	635	17.75	451	19.75	502	26	660	13.75	349
A4□1171□□1LC	100	30	80	24	50	15	17	432	21	533	26.75	679	28.75	730	24	610	22.75	578
A4□2101□□1LC	100	30	80	24	50	15	10	254	25	635	19.75	502	21.75	552	26	660	15.75	400
A4□1321□□1LC	200	61	150	46	100	30	32	813	21	533	41.75	1060	43.75	1111	24	610	37.75	959
A4□2191□□1LC	200	61	150	46	100	30	19	483	25	635	28.75	730	30.75	781	26	660	24.75	629
A4□3131□□1LC	200	61	150	46	100	30	13	330	28	711	26.75	679	28.75	730	30	762	18.75	476
A4□3221□□1LC	325	99	250	76	200	61	22	559	28	711	31.75	806	33.75	857	29	737	27.75	705
A4□4171□□1LC	350	107	275	84	200	61	17	432	31	787	26.75	679	28.75	730	34	864	22.75	578

Verify application dimensions and weight requirements prior to ordering. **Installation Note:** For the warranty to be valid, a flexible connector MUST be used between the swivel and the inlet piping.

Heavy Duty Large Frame Reels Nordic Series 3900

1½" Fluid Path for 1" through 1½" I.D. Hose

Rewind: Gear-drive rewind (new) or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" straight victaulic with 1½" female NPT straight swivel joint is standard. 2" victaulic 90° with 1½" NPT female available at extra cost.

Gooseneck: 1", 1¼" and 1½" female/male NPT outlet. Other sizes and/or threads can be furnished and must be specified.

ADD 12" to E dimension when crank is in rewind position.
The standard color for this series is red or gray.

NEW!
Gear drive option


1/2" pitch chain now standard

Shown with optional bevel crank.

Made in USA



Dimensions Diagram

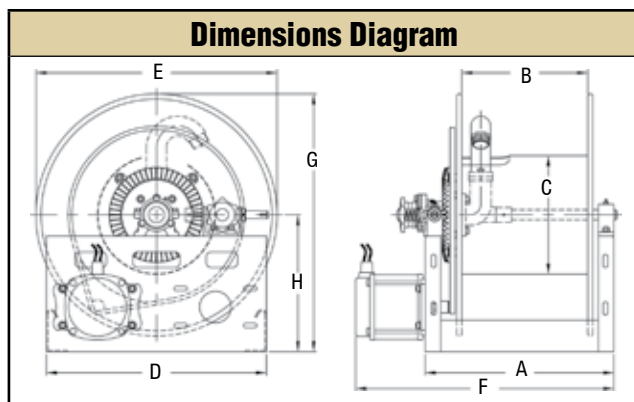

Standard seals maximum temperature 174° F (79° C) and minimum temperature -20° F (-29° C). Extreme temperature seals maximum temperature 400° F (204° C) and minimum temperature -50° F (-45° C) and standard pressures to 600 PSI. Other temperatures or pressures can be furnished at extra cost, consult manufacturer.

Note: Weights shown in chart are for crank rewind models.

Add these amounts and model number prefix for power rewind models.

Prefix	Type	LB / KG
EP	Electric	42 / 19
A	Air	26 / 12
H	Hyd	26 / 12

Hose I.D.		1	1 1/4	1 3/8	1 1/2	Specification - Hose Capacity and Reel Dimensions															
Hose O.D.		25	32	35	38																
		40	46	51	52	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor															
Model	Hose Length	Est. Weight	A	B	C	D	E CRK	E ELC	E AIR	E HYD	F CRK	F ELC	F AIR	F HYD	G	H					
3900-19-16	ft	55	45	45	40	90 LB	in	22	16	11.25	21	21	21	21	26	29	28	28	22.5	13	
	m	17	14	14	12	41 KG	mm	559	406	286	533	533	533	533	660	737	711	711	572	330	
3900-19-20	ft	70	65	60	55	93 LB	in	26	20	11.25	21	21	21	21	30	33	32	32	22.5	13	
	m	21	20	18	17	42 KG	mm	660	508	286	533	533	533	533	762	838	813	813	572	330	
3900-23-12	ft	95	60	55	50	87 LB	in	18	12	11.25	21	23	23	23	22	25	24	24	24.5	13	
	m	29	18	17	15	39 KG	mm	457	305	286	533	584	584	584	559	635	610	610	622	330	
3900-23-18	ft	155	90	90	80	93 LB	in	24	18	11.25	21	23	23	23	28	31	30	30	24.5	13	
	m	47	27	27	24	42 KG	mm	610	457	286	533	584	584	584	711	787	762	762	622	330	
3900-23-20	ft	165	105	100	95	95 LB	in	26	20	11.25	21	23	23	23	30	33	32	32	24.5	13	
	m	50	32	30	29	42 KG	mm	660	508	286	533	584	584	584	762	838	813	813	622	330	
3900-23-26	ft	220	120	110	105	100 LB	in	32	26	11.25	21	23	23	23	36	39	38	38	24.5	13	
	m	67	37	34	32	45 KG	mm	813	660	286	533	584	584	584	914	991	965	965	622	330	
3900-23-28	ft	240	145	140	135	103 LB	in	34	28	11.25	21	23	23	23	38	41	40	40	24.5	13	
	m	73	44	43	41	47 KG	mm	864	711	286	533	584	584	584	965	1041	1016	1016	622	330	
3900-23-36	ft	320	190	180	175	111 LB	in	42	36	11.25	21	23	23	23	46	49	48	48	24.5	13	
	m	98	58	55	53	50 KG	mm	1067	914	286	533	584	584	584	1168	1245	1219	1219	622	330	
3900-25-12	ft	95	85	55	50	89 LB	in	18	12	11.25	21	25	25	25	22	25	24	24	26.5	14	
	m	29	26	17	15	40 KG	mm	457	305	286	533	635	635	635	559	635	610	610	673	356	
3900-25-20	ft	165	155	100	95	97 LB	in	26	20	11.25	21	25	25	25	30	33	32	32	26.5	14	
	m	50	47	30	29	44 KG	mm	660	508	286	533	635	635	635	762	838	813	813	673	356	
3900-31-12	ft	210	155	115	105	92 LB	in	18	12	11.25	24	31	31	31	22	25	24	24	32.5	17	
	m	64	47	35	32	42 KG	mm	457	305	286	610	787	787	787	559	635	610	610	826	432	
3900-31-16	ft	305	205	155	150	96 LB	in	22	16	11.25	24	31	31	31	26	29	28	28	32.5	17	
	m	93	62	47	46	44 KG	mm	559	406	286	610	787	787	787	660	737	711	711	826	432	
3900-31-20	ft	365	275	200	190	100 LB	in	26	20	11.25	24	31	31	31	30	33	32	32	32.5	17	
	m	111	84	61	58	45 KG	mm	660	508	286	610	787	787	787	762	838	813	813	826	432	

Refer to page 28 to build a complete model number.

Heavy Duty Large Frame Reels

Nordic Series 3900 LPG

1½" or 2" Fluid Path for 1" through 2" I.D. Hose

Rewind: Gear-drive or chain and sprocket drive powered by explosion proof A.C. or D.C. electric motor, compressed air motor or hydraulic motor.


Inlet: Full Circle® UL approved swivels available in 1", 1½" and 2" as standard.

Hose Boss (optional accessory)


The Hose Boss Rewind Assist consists of a rewind switch mounted in an extended arm with two hose rollers. Assists in efficiently and safely unwinding and rewinding hose.

Now available in polished aluminum

Nordic Series 3900 LPG

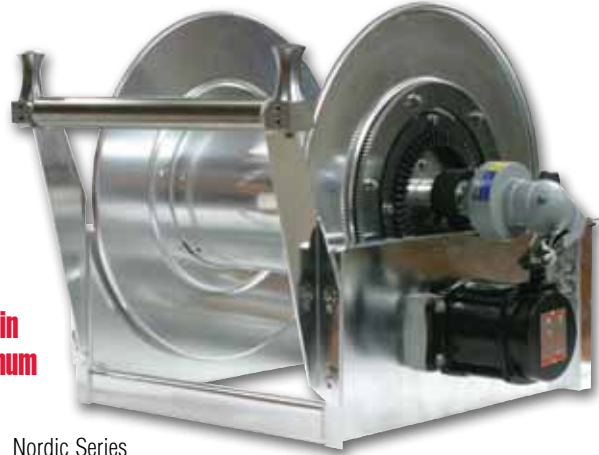

Inset: Nordic Series 3900 LPG with optional Hose Boss



Hose Boss

Heavy Duty Spring Retractable Reels


Series 80000/D80000 - ½", ¾", 1" I.D.

OPTIONS

Choose a reel model from the chart below, then use the suffix codes below to choose a flange/ end plate material.

LP82000 OL

Flange/End Plate Material	
S	Stainless Steel
P	Carbon Steel



Hose not included

Series 80000 Carbon steel With Full Circle® swivel

Made in USA



Model	Hose I.D.		Hose O.D.		Capacity		Pressure		Weight		A		B		D		E		F	
	in	mm	in	mm	ft	m	psi	bar	lbs	kg	in	mm	in	mm	in	mm	in	mm	in	mm
Series 80000 / D80000: Spring Driven Reels																				
LP82000 OL*	1/2	13	.845	21	100	30	300	21	82	37	24	610	25 3/8	645	15	381	10	254	6	152
LP83000 OL*	3/4	19	1.188	30	50	15	500	35	82	37	24	610	25 3/8	645	15	381	10	254	6	152
LPD83000 OL*	3/4	19	1.188	30	75	23	500	35	77	35	24	610	25 3/8	645	16 3/8	416	10 1/2	267	7 7/8	200
LPD84000 OL*	1	25	1.500	38	50	15	500	35	77	35	24	610	25 3/8	645	16 3/8	416	10 1/2	267	7 7/8	200

*Choose flange/end plate material from charts above. Refer to page 13 for dimension chart.

Hose I.D.	in	mm	1 25	1 1/4 32	1 1/2 38	2 51	Specification - Hose Capacity and Reel Dimensions Refer to chart on page 31 for Series 3900 LPG dimensions.													
Hose O.D.	in	mm	1.563 40	1.813 46	2.063 52	2.563 65														
Model	Hose Length					Est. Weight	A	B	C	D	E	F	G	H						
3900-19-20*	ft	75	70	55		103 LB	in	26	20	11.25	21	33	22.5	13						
	m	23	21	17		47 KG	mm	660	508	286	533	533	838	572	330					
3900-23-16*	ft	125	90	75		100 LB	in	22	16	11.25	21	23	29	13						
	m	38	27	23		45 KG	mm	559	406	286	533	584	737	622	330					
3900-23-20*	ft	160	125	100		105 LB	in	26	20	11.25	21	23	33	13						
	m	49	38	30		48 KG	mm	660	508	286	533	584	838	622	330					
3900-23-24*	ft	200	150	125		110 LB	in	30	24	11.25	21	23	37	13						
	m	61	46	38		50 KG	mm	762	610	286	533	584	940	622	330					
3900-25-14*	ft	150	100	65		102 LB	in	20	14	11.25	21	25	27	14						
	m	46	30	20		46 KG	mm	508	356	286	533	635	686	673	356					
3900-25-18*	ft	200	150	80		105 LB	in	24	18	11.25	21	25	31	14						
	m	61	46	24		48 KG	mm	610	457	286	533	635	787	673	356					
3900-23-26*	ft			90	35	112 LB	in	32	26	15	21	23	39	13						
	m			27	11	51 LG	mm	813	660	381	533	584	991	622	330					
3900-31-12*	ft			90	50	102 LB	in	18	12	15	24	31	25	17						
	m			27	15	46 KG	mm	457	305	381	610	787	635	826	432					
3900-31-22*	ft			185	110	115 LB	in	28	22	15	24	31	35	17						
	m			56	34	52 KG	mm	711	559	381	610	787	889	826	432					

*Refer to page 28 to build a complete model number including LPG swivel. Refer to charts on page 13 and 31 for dimensions.

Nordic Series 3700 & 5900

Rewind: Gear-drive crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Gooseneck: 2" (Series 3700) / 3" (Series 5900) / 4" (Series 5900) female NPT. Other sizes and/or threads can be furnished and must be specified.

Series 5900 product temperatures from -50° F to +400° F and standard pressures to 300 p.s.i. Series 3700 standard seals maximum temperature 174° F (79° C) and minimum temperature -20° F (-29° C). Extreme temperature seals maximum temperature 400° F (204° C) and minimum temperature -50° F (-45° C).

Series 3700 and 5900
are shown with optional
bevel crank.



Nordic Series 3700

**1/2" pitch chain
now standard**



Standard pressures to 300 PSI Other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. ADD 12" to E dimension when crank is in rewind position.

Hose I.D.	in mm	1 1/2 38	2 51	2 1/2 64	3 76	4 102	Specification - Hose Capacity and Reel Dimensions															
Hose O.D.	in mm	2.063 52	2.563 65	3.188 81	3.75 95	4.75 121	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor															
Model	Hose Length					Est. Weight		A	B	C	D	E CRK	E ELC	E AIR	E HYD	F CRK	F ELC	F AIR	F HYD	G	H	
3700-23-20	ft m	65 20	25 8				114 LB 52 KG	in mm	26 660	20 508	15 381	21 533	23 584	23 584	23 584	30 762	33 838	32 813	32 813	24.5 622	13 330	
3700-25-20	ft m	65 20	55 17				124 LB 56 KG	in mm	26 660	20 508	15 381	21 533	25 635	25 635	25 635	30 762	33 838	32 813	32 813	26.5 673	14 356	
3700-25-24	ft m	80 24	65 20				128 LB 58 KG	in mm	30 762	24 610	15 381	21 533	25 635	25 635	25 635	34 864	37 940	36 914	36 914	26.5 673	14 356	
3700-25-32	ft m	115 35	90 27				136 LB 62 KG	in mm	38 965	32 813	15 381	21 533	25 635	25 635	25 635	44 1067	45 1143	44 1118	44 1118	26.5 673	14 356	
3700-31-12	ft m	90 27	50 15				134 LB 61 KG	in mm	18 457	12 305	15 381	24 610	31 787	31 787	31 787	22 559	25 635	24 610	24 610	32.5 826	17 432	
3700-31-20	ft m	165 50	90 27				142 LB 64 KG	in mm	26 660	20 508	15 381	24 610	31 787	31 787	31 787	30 762	33 838	32 813	32 813	32.5 826	17 432	
3700-31-26	ft m	220 67	125 38				148 LB 67 KG	in mm	32 813	26 660	15 381	24 610	31 787	31 787	31 787	36 914	39 991	38 965	38 965	32.5 826	17 432	
3700-39-16	ft m	225 69	140 43				182 LB 83 KG	in mm	22 559	16 406	15 381	24 610	39 991	39 991	39 991	26 660	29 737	28 711	28 711	40.5 1029	21 533	
3700-39-24	ft m	350 107	220 67				190 LB 86 KG	in mm	30 762	24 610	15 381	24 610	39 991	39 991	39 991	34 864	37 940	36 914	36 914	40.5 1029	21 533	
5900-31-16	ft m		55 17	20 6	15 5		140 LB 64 KG	in mm	22 559	16 406	20 508	24 610	31 787	31 787	31 787	26 660	29 737	28 711	28 711	32.5 826	17 432	
5900-31-24	ft m		85 26	30 9	25 8		150 LB 68 KG	in mm	30 762	24 610	20 508	24 610	31 787	31 787	31 787	34 864	37 940	36 914	36 914	32.5 826	17 432	
5900-31-32	ft m		120 37	45 14	35 11		160 LB 73 KG	in mm	38 965	32 813	20 508	24 610	31 787	31 787	31 787	42 1067	45 1143	44 1118	44 1118	32.5 826	17 432	
5900-36-12	ft m		60 18	30 9	30 9		146 LB 66 KG	in mm	18 457	12 305	20 508	24 610	36 914	36 914	36 914	22 559	25 635	25 610	24 610	37.5 953	21 533	
5900-36-16	ft m		90 27	50 15	40 12	12 4	150 LB 68 KG	in mm	22 559	16 406	20 508	24 610	36 914	36 914	36 914	26 660	29 737	28 711	28 711	37.5 953	21 533	
5900-39-12	ft m		90 27	50 15	35 11	15 5	180 LB 82 KG	in mm	18 457	12 305	20 508	24 610	39 991	39 991	39 991	22 559	25 635	24 610	24 610	40.5 1029	21 533	
5900-39-16	ft m		135 41	80 24	50 15	15 5	200 LB 91 KG	in mm	22 559	16 406	20 508	24 610	39 991	39 991	39 991	26 660	29 737	28 711	28 711	40.5 1029	21 533	
5900-39-24	ft m		200 61	120 37	65 20	25 8	210 LB 95 KG	in mm	30 762	24 610	20 508	24 610	39 991	39 991	39 991	34 864	37 940	36 914	36 914	40.5 1029	21 533	

Refer to page 28 to build a complete model number. Refer to diagram on page 31 for dimension key.

Heavy Duty Large Frame Reels Petroleum Service

1½" or 2" Fluid Path for 1¼" through 2" I.D. Hose

Rewind: Chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.
30° manual rewind assembly available at extra cost.


Inlet: 90° 2" victaulic is standard. Straight swivel joints may be specified at no extra cost.

Gooseneck: 1¼", 1½" or 2" female/male NPT is available. Specify male or female fitting and hose size when ordering.

Brakes and locks: Manual friction brake and air operated caliper brake are standard.



Dimensions Diagram

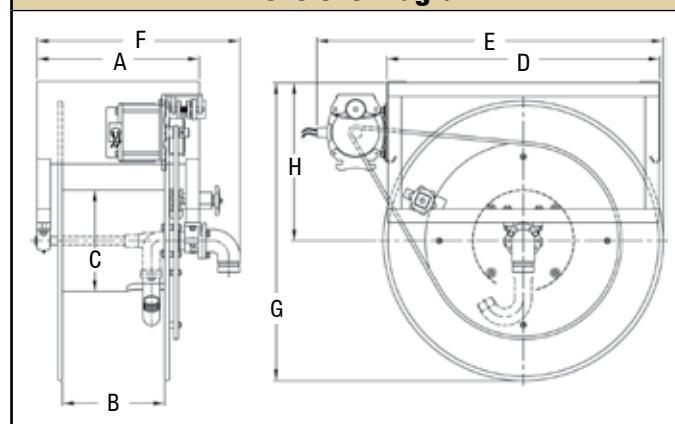

Made in USA 

Standard seals maximum temperature 174° F (79° C) and minimum temperature -20° F (-29° C). Extreme temperature seals maximum temperature 400° F (204° C) and minimum temperature -50° F (-45° C). Standard pressures to 300 PSI. Other temperatures or pressures can be furnished at extra cost; consult manufacturer. The standard color for this series is red or gray.

Hose I.D.	in mm	1 1/4 32	1 3/8 35	1 1/2 38	2 51	Specification - Hose Capacity and Reel Dimensions									
Hose O.D.	in mm	1.813 46	2.000 51	2.063 52	2.563 65										
Model	Hose Length					Est. Weight		A	B	C	D	E	F	G	H
3800-31-10	ft	130	90	80		174 LB	in	16	10	11.25	30	38.5	20.25	33	17.5
	m	40	27	24		79 KG	mm	406	254	286	762	978	514	838	445
3800-31-12	ft	155	115	105		176 LB	in	18	12	11.25	30	38.5	22.25	33	17.5
	m	47	35	32		80 KG	mm	457	305	286	762	978	565	838	445
3800-31-16	ft	205	155	150		180 LB	in	22	16	11.25	30	38.5	26.25	33	17.5
	m	62	47	46		82 KG	mm	559	406	286	762	978	667	838	445
3800-39-7	ft	120	100	85		212 LB	in	13	17	11.25	32	43.5	17.25	41	21.5
	m	37	30	26		96 KG	mm	330	432	286	813	1105	438	1041	546
3800-39-9	ft	150	135	120		214 LB	in	15	9	11.25	32	43.5	19.25	41	21.5
	m	46	41	37		97 KG	mm	381	229	286	813	1105	489	1041	546
3800-39-11	ft	220	170	155		216 LB	in	17	11	11.25	32	43.5	21.25	41	21.5
	m	67	52	47		98 KG	mm	432	279	286	813	1105	540	1041	546
3800-31-13	ft	120	110	105	60	178 LB	in	19	13	15	30	38.5	24.5	33	17.5
	m	37	34	32	18	81 KG	mm	483	330	381	762	978	622	838	445
3800-39-12	ft	225	180	160	105	218 LB	in	18	12	15	32	43.5	23.5	41	21.5
	m	69	55	49	32	99 KG	mm	457	305	381	813	1105	597	1041	546
3800-39-16	ft	305	245	225	150	224 LB	in	22	16	15	32	43.5	27.5	41	21.5
	m	93	75	69	46	102 KG	mm	559	406	381	813	1105	699	1041	546

Refer to page 28 to build a complete model number.



Heavy Duty Single Wrap Reels Petroleum / Aviation Fuel Service

1½", 2" or 3" Fluid Path for 1" through 3" I.D. Hose

Rewind: Chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" victaulic is standard for 1" through 2" ID hose. 3" victaulic is standard for 2½" and 3" ID hose. 1½", 2" and 3" NPT or BSPP available. 90° Inlets available.

Gooseneck: 1½", 2" and 3" NPT or BSPP. Specify male or female threads for gooseneck.

Brakes and locks: Air operated caliper brake and idler assembly is standard. Manual friction brake optional.


Materials: Standard frame and spool assembly are of heavy duty steel construction. Also available in aluminum. The standard color for this series is red or gray.

Operating pressure: 300 PSI maximum. Reels to operate at other pressure ratings available at extra cost. Consult manufacturer.

Operating temperatures: Maximum 400°F (204°C) / minimum -50°F (-46°C). Reels that are to operate at other temperature ratings are available at extra cost, consult manufacturer.



Dimensions Diagram

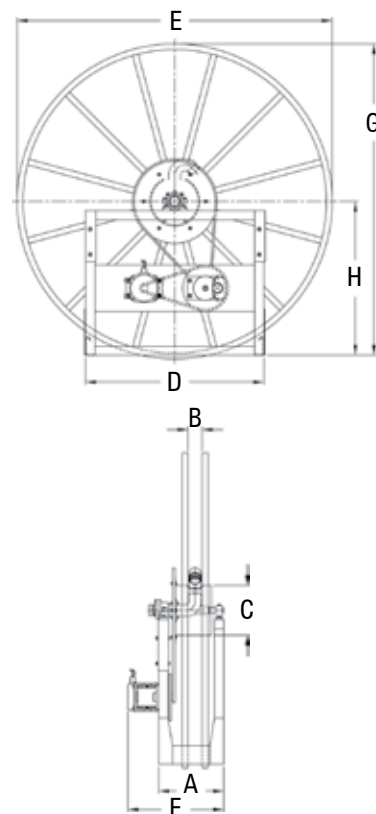

Hose I.D.	in mm	1 3/8 35	1 1/2 38	2 51	2 1/2 64	3 76					
Hose O.D.	in mm	2.000 51	2.063 52	2.563 65	3.063 81	3.750 95					
Model	Hose Length							D	E	G	H
6000-47	ft	55	50	30	25	20	in	38.5	47	48.5	25
	m	17	15	9	8	6	mm	978	1194	1232	635
6000-55	ft	80	75	50	40	35	in	38.5	55	55.75	28.25
	m	24	23	15	12	11	mm	978	1397	1416	718
6000-62	ft	100	100	70	50	50	in	38.5	62	62.75	31.75
	m	30	30	21	15	15	mm	978	1575	1594	806
6000-68	ft	125	120	85	70	60	in	38.5	68	68.75	34.75
	m	38	37	26	21	18	mm	978	1727	1746	883
6000-72	ft	150	140	100	80	70	in	38.5	72	72.75	36.75
	m	46	43	30	24	21	mm	978	1829	1848	933

Hose I.D.	Dimensions							
	A		B		C*		F	
	in	mm	in	mm	in	mm	in	mm
1 3/8"	12	305	2.5	64	18	457	18.5	470
1 1/2"	12	305	2.5	64	18	457	18.5	470
2"	12	305	3.5	89	24	610	18.5	470
2 1/2"	13	330	3.5	89	24	610	19.5	495
3"	14	356	4.5	114	24	610	20.5	521

*Drum diameter conforms to API 1529 Appendix A.

Light/Medium Duty Cord Reels

Reelcraft's new line of light and medium duty cord reels are designed for less strenuous applications in which a capable and long-lasting reel is required. The reels accommodate lengths of 16/3, 14/3, 12/3, and 10/3 diameter cable.

		Dimensions - Size Index							
	No.	1		2		3		4	
		in / mm		in / mm		in / mm		in / mm	
A		11 ⁷ / ₈	302	15 ¹ / ₄	387	13 ³ / ₄	349	17 ³ / ₄	451
B		9 ¹ / ₄	235	11 ¹ / ₂	292	11	279	17 ¹ / ₄	438
C		3 ³ / ₄	95	5	127	8 ³ / ₄	222	11 ¹ / ₈	283
D		2 ³ / ₄	98	9 ³ / ₁₆	233	1/4" mounting holes. If reels are to be mounted more than 15' overhead, consult manufacturer.			
E		2	51	3	76				
F		1 ⁷ / ₈	48	5 ¹ / ₂	139				
G		7 ⁷ / ₁₆	11	9 ⁹ / ₁₆	14				
H		N/A		1 ⁵ / ₈	41				

Series LD Cord Reels

Designed for overhead mounting, these reels are compact, feature a powder coated steel housing, adjustable cable stop and a resettable circuit breaker.

Model with Cord	Cord Ending	Cord Specifications					Volts	Amps	Weight		Size Index #
		AWG / mm	# Cond	ft / m	Type				lbs / kg		
LD2040 163 2*	Style 2	16 1.33	3	40 12	SJTW	120	0.3	11 5	1		
LD2030 163 9	Style 9	16 1.33	3	30 9	SJTW	125	10	8 4	1		
LD2030 143 9	Style 9	14 2.08	3	30 9	SJTW	125	13	9 4	1		

*Requires a minimum of five feet hanging cable (outside reel). Designed for ceiling mount.

Series LG Cord Reels

The medium duty Series LG cord reels are constructed from high-impact resistant composite materials to be lighter and compact. They may be mounted overhead, on a wall or detached from the mounting bracket completely. They also feature an adjustable cable stop and a circuit breaker that can be reset.

Model with Cord	Cord Ending	Cord Specifications					Volts	Amps	Weight		Size Index #
		AWG / mm	# Cond	ft / m	Type				lbs / kg		
LG3050 163 8*	Style 8	16 1.33	3	50 15	SJTW	120	10	13 6	2		
LG3050 143 9	Style 9	14 2.08	3	50 15	SJTW	125	13	14 6	2		
LG3040 123 9	Style 9	12 3.32	3	40 12	SJTW	125	15	14 6	2		

*Requires a minimum of five feet hanging cable (outside reel).

Series LH Hand Crank Reels

Designed with the contractor in mind, Series LH medium duty hand crank reels are portable and deliver power where and when it is necessary. They feature four circuit breaker protected outlets and a corrosion resistant powder coating.

Model with Cord*	Cord Ending	Cord Specifications					Volts	Amps	Weight		Size Index #
		AWG / mm	# Cond	ft / m	Type				lbs / kg		
LH2080 143	4 Outlets	14 2.08	3	80 24	SJTW	125	10	15 7	3		
LH3100*	4 Outlets	10 5.37	3	100 30	STW	125	15	13 6	4		

*Does not include cord

Products on this page are warranted for 90 days.

Light cord reels are UL listed for the United States. Power cord reels and hand crank reels are UL listed for United States and Canada.

Cord Options

Style #2

13 watt fluorescent light features a durable shock-resistant lamp holder and shatter-resistant tube with switch.



Style #8

13 watt fluorescent light features an on/off switch on the handle and an outlet.



Style #9

Triple outlet with grounded receptacles. For maximum ratings, consult manufacturer.



Light duty
LD2030 143 9

Light duty
LD2040 163 2



Light duty
LD2030 163 9



Medium duty
LG3050 163 8



Medium duty
LG3050 143 9

Portable power
LH2080 143



Portable Power
LH3100

Models listed with an icon can be shipped same day upon request when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Better by Design

Adjustable Bumper Stop

Allows any desired length of cord to be maintained outside the reel.

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.


Reelcraft offers many styles of outlets and lamps

- Single receptacle
- Duplex outlet box w/ GFCI(F)
- Triple tap
- R.V. plug
- Fluorescent
- Incandescent
- LED
- Flying lead

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Note: Swing brackets should be used if cords are pulled at more than 45°, see page 47.



Adjustable Guide Arm

Multiple guide arm positions for versatile uses and easier field adjustment.

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.



Structural Strength

Robotically welded heavy gauge steel frame.



Model Number Significance

This chart is for reference purposes only. Reels cannot be ordered by selecting from this chart. Please refer to selection charts on pages 38-39 or consult manufacturer for any questions about option combinations.

Model	Outside Dia. of Cord	Cord Specifications			
		AWG /mm ²	# Cond.	Type	
600193	.320" - .530"	16 1.33	3	SJO	
1-HR1004-A	.438" - .624"	12 3.32	3	SJO	
600267	.645"	10 5.37	3	SO	
1-HR1004	.625" - .749"	12 3.32	3	SO	
3-HR1004-3	1.06" - 1.30"	6 8.00	3	SO	

SERIES L4000 and L5000 CORD REELS

FOR REFERENCE ONLY

L 4 0 5 0 1 6 3 3

REEL SERIES

40 = 4000 SERIES REEL
45 = 4500 SERIES REEL
55 = 5500 SERIES REEL
57 = 5700 SERIES REEL

WIRE SIZE

10 = 10 GAUGE
12 = 12 GAUGE
16 = 16 GAUGE

LENGTH OF CORD

00 = W/O CORD
35 = 35 FEET
45 = 45 FEET
50 = 50 FEET

NO. OF CONDUCTORS

2 = TWO CONDUCTOR
3 = THREE CONDUCTOR

STYLE NUMBERS

NONE = OPEN END
1 = INCANDESCENT LAMP
2 = FLUORESCENT LAMP
3 = SINGLE RECEPTACLE
4 = R.V. PLUG (M)
5 = INCANDESCENT NON-SPARKING
6x = FLUORESCENT EXPLOSION PROOF
7 = DUPLEX OUTLET BOX (F) W/GFCI
8 = FLUORESCENT W/OUTLET
9 = TRI TAP
10 = LED LAMP
X = FLYING LEAD

Power and Light Cord Reels | Series L4000 / L5000

Made
in USA

Heavy duty
triple receptacle
L 4545 123 9G
NEW!



Heavy duty
flying lead
L 4050 163 X



Heavy duty GFCI
duplex outlet box
L 4545 123 7

- ✓ Compact for critical space requirements
- ✓ Durable abrasion and corrosion resistant baked-on powder coat finish
- ✓ Engineered for industrial use
- ✓ All models supplied with cord are complete with approximately 4-5 foot pigtail and three-prong plug
- ✓ Adjustable cord stop
- ✓ Wall, ceiling or bench mount

Model with Cord	Cord Ending	Cord Specifications				Volts	Amps	Shipping Weight	Size Index #
		AWG / mm	# Cond.	ft / m	Type				
L 4035 163 3	Single Receptacle	16 1.33	3	35 11	SJTOW	125	13	25 11	1
L 4050 163 3	Single Receptacle	16 1.33	3	50 15	SJTOW	125	13	26 12	1
L 4545 123 3	Single Receptacle	12 3.32	3	45 14	SJE0OW	125	15	27 12	1
L 5550 123 3	Single Receptacle	12 3.32	3	50 15	SJE0OW	125	15	44 20	3
L 4545 123 3A	Single Connector	12 3.32	3	45 14	SJE0OW	125	20	28 13	1
L 5550 123 3A	Single Connector	12 3.32	3	50 15	SJE0OW	125	20	44 20	3
L 4545 123 3B	Twist Lock Connector	12 3.32	3	45 14	SJE0OW	125	20	28 13	1
L 5550 123 3B	Twist Lock Connector	12 3.32	3	50 15	SJE0OW	125	20	44 20	3
L 5750 103 4	R.V. Plug	10 5.37	3	50 15	SOOW	125	30	50 23	4
L 4545 123 7A	Duplex Outlet Box w/GFCI (F)*	12 3.32	3	45 14	SJE0OW	125	20	29 13	1
L 4545 123 7	Duplex Outlet Box w/GFCI (F)*	12 3.32	3	45 14	SJE0OW	125	15	29 13	1
L 5550 123 7	Duplex Outlet Box w/GFCI (F)*	12 3.32	3	50 15	SE0OW	125	**20	45 20	3
L 4050 163 9	Triple Tap	16 1.33	3	50 15	SJE0OW	125	13	26 12	1
L 4545 123 9	Triple Tap	12 3.32	3	45 14	SJE0OW	125	15	28 13	1
L 4545 123 9G	Triple Tap w/ GFCI (F)	12 3.32	3	45 14	SJE0OW	125	15	29 13	1

For indoor non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220V. **Inlet plug is NEMA5-15P configuration. Plug ends not set up for 20 amp. **NOTE:** Swing brackets should be used if cords are pulled at more than 45°. * The GFCI Receptacle is designed to protect people from the line-to-ground shock hazards, which could occur from defective power tools or appliances operating from this device or from down line outlets protected by it. The Ground Fault Circuit Interrupter does not protect against short circuits or overloads; this is the function of the fuse or circuit breaker.

Cord Options

	Style #3 - Single Receptacle Single 15 AMP receptacle with clamp type strain relief available for both 16 AWG and 12 AWG cord.
	Style #3A - Single Receptacle Single 20 AMP receptacle.
	Style #3B - Single Receptacle Single 20 AMP receptacle with twist lock connector.
	Style #4 - R.V. Plug Male rubber plug used with recreational vehicles (RV's).
	Style #7 / 7A - Dual Outlet Box Dual outlet box with GFCI protection and flip-top lid.
	Style #9 - Triple Tap NEW! Molded triple tap available with GFCI protection.
	Style X - Flying Lead Bare cord/cable endings and conduit box.

Flying Lead Model with Cord	Model No Cord	Cord Specifications				Volts	Amps	Shipping Weight*	Size Index #
		AWG / mm	# Cond.	ft / m	Type				
L 4050 163 X	L 4000	16 1.33	3	50 15	SJE0OW	125	13	22 10	1
-----	L 4100	16 1.33	4	40 12	SJE0OW	125	13	22 10	1
L 4545 123 X	L 4500	12 3.32	3	45 14	SJE0OW	125	20	22 10	1
-----	L 5000	10 5.27	3	35 11	SO	125	30	29 13	2
-----	L 5400	12 3.32	3	35 11	SJE0OW	125	13	25 11	2
L 5550 123 X	L 5500	12 3.32	3	50 15	SE0OW	125	20	35 16	3
L 5550 124 X	-----	12 3.32	4	50 15	SE0OW	600	16	44 20	3
L 5750 103 X	L 5700	10 5.27	3	50 15	SE0OW	125	30	37 17	4
-----	L 7000	16 13.3	4	35 11	SOOW	220	45	41 19	**
L 7050 104 X	-----	10 5.27	4	50 15	SE0OW	600	20	65 29	**

For indoor non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase; suitable for 220 V. *Without cord. **Refer to master catalog or reelcraft.com.

Available
Options

Mounting
Brackets
See page 47



Replacement
Bumpers
See page 49



Models listed with an icon can be shipped same day upon request when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 Indiana & California Warehouses

California Warehouse
 Canadian Warehouse

Power and Light Cord Reels | Series L4000 / L5000

Dimensions - Size Index				
No.	1	2	3	4
	in / mm	in / mm	in / mm	in / mm
A	13 ¹ / ₄ 337	14 ¹ / ₂ 368	17 ¹ / ₂ 445	17 ¹ / ₂ 445
B	12 ⁵ / ₈ 321	13 ¹ / ₂ 343	16 ¹ / ₂ 419	16 ¹ / ₂ 419
C	8 203	9 ³ / ₄ 248	9 ³ / ₄ 248	9 ³ / ₄ 248
D	2 ¹ / ₂ 64	2 ¹ / ₂ 64	2 ¹ / ₂ 64	2 ¹ / ₂ 64
E	9 ³ / ₈ 239	10 ¹ / ₂ 267	10 ¹ / ₂ 267	12 ¹ / ₂ 318
F	1 ³ / ₄ 44	2 ¹ / ₈ 54	2 ¹ / ₈ 54	2 ¹ / ₈ 54

Four 5/16" (8mm) diameter mounting holes.

Model with Cord	Cord Ending	Cord Specifications				Volts	Amps	Shipping Weight		Size Index #
		AWG / mm	# Cond	ft / m	Type			lbs / kg		
L 4035 163 1	*Incandescent	16 1.33	3	35 11	SJTOW	125	13	23 10		1
L 4050 163 1	*Incandescent	16 1.33	3	50 15	SJTOW	125	13	27 12		1
L 4035 A 163 5**	*Incandescent	16 1.33	3	35 11	SJEOOW	125	13	25 11		1
L 4050 A 163 5**	*Incandescent	16 1.33	3	50 15	SJEOOW	125	13	28 13		1
L 5245 A 163 6X**	Fluorescent	16 1.33	3	45 14	SJEOOW	125	0.3	39 18		2
L 4035 162 2	Fluorescent	16 1.33	2	35 11	SJTOW	125	0.3	25 11		1
L 4050 162 2	Fluorescent	16 1.33	2	50 15	SJTOW	125	0.3	26 12		1
L 4035 163 8	Fluorescent Light and Outlet	16 1.33	3	35 11	SJTO	125	10	25 11		1
L 4050 163 8	Fluorescent Light and Outlet	16 1.33	3	50 15	SJTO	125	10	27 12		1
L 4035 163 10	LED	16 1.33	3	35 11	SJTOW	125	13	26 12		1
L 4050 163 10	LED	16 1.33	3	50 15	SJTOW	125	13	28 13		1

For indoor non-weather tight applications only. *Incandescent bulb 75 watt max. All models UL listed at 125 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220 V. **Models equipped with automatic on/off switch that activates power. **NOTE:** Swing brackets should be used if cords are pulled at more than 45°.

Auto-Switch Light Cord Reels

Models equipped with an automatic on/off switch incorporate a guide arm-mounted switch that activates power with a pull of the cord.



Heavy duty fluorescent
L 5245 A 163 6X



Note: Reel is not explosion proof

Fluorescent Hand Lamp - order model 1 163 3 8

- One foot #16/3 conductor SJTOW-A yellow cord with molded NEMA 5-15P plug
- SAF-T-TIE keeps the light plugged into receptacle



Heavy duty incandescent
L 4050 163 1

Made in USA

NEW!
Heavy duty LED
L 4050 163 10



Heavy duty fluorescent
L 4050 162 2

Cord Options

	Style #1 - Incandescent Light <ul style="list-style-type: none"> • Single receptacle tool tap • Push-through switch • Metal grounded guard
	Style #2 - Fluorescent Light <ul style="list-style-type: none"> • Durable shock absorbing lamp holder • Shatter-resistant tube with switch
	Style #5 - Incandescent Light <ul style="list-style-type: none"> • Rubber handle with vinyl-coated cage w/o switch or receptacle • Automatic on/off switch at reel guide arm • Complies with NEC #511-3.f., portable lighting equipment; meets OSHA requirements
	Style #6 - Fluorescent Light <ul style="list-style-type: none"> • Explosion Proof 13 watt fluorescent hand lamp • Automatic on/off switch at reel guide arm • Suitable for Class 1, group C and D locations Note: Reel is not explosion-proof.
	Style #8 - Fluorescent Light <ul style="list-style-type: none"> • 120v-15amp receptacle is located in line on cord • Scratch guard protects lamp cover
	Style #10 - LED Light <ul style="list-style-type: none"> • Eight ultra high intensity 1/2 watt LEDs • Polycarbonate shatter-resistant light tube

High Capacity Cable Reels Nordic Series CR2400/CR3100 for 3-conductor service



Series CR2400 - Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor or compressed air motor. An adjustable spring drag device is used to brake the reel.

Series CR3100 - Powered by a rugged spring protected by a tamperproof housing, a ratchet mechanism locks on payout of cable, but is easily disengaged with a pull to provide rewind.

Cable rollers: Series CR3100 models supplied with a 4-way roller guide assembly. Roller guide supplied with Series CR2400 models at extra cost. Roller position must be specified. If not specified, bottom wind will be supplied. Can be supplied or installed, consult manufacturer.


Note: A hose/cable stop should be used to prevent damage to rollers and to permit adjustment of free cable length.



Nordic
Series CR3100

Many more sizes, from standard components, available on request. Consult manufacturer.

Dimensions Diagram

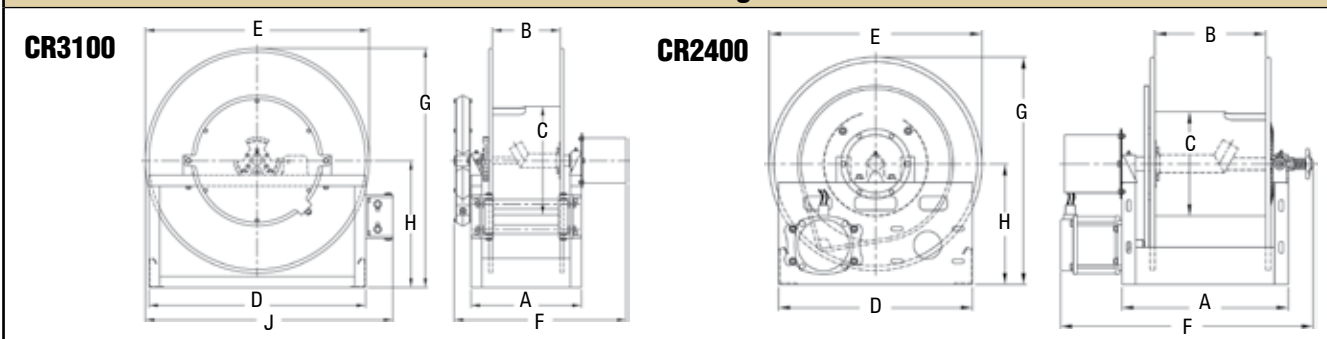

Gauge / No. of Conductors		16/3	14/3	12/3	10/3	8/3				Specifications - Cable Capacity and Reel Dimensions													
Cable O.D.		in mm	.375 10	.530 13	.580 15	.705 18	.750 19	1.000 25	1.250 32	1.500 38	"F" dimension based on three conductor slip ring												
Model	Cable Length									Est. Weight		A	B	C	D	E	E PWR	F	F PWR	G	H	J	
Spring Driven Reels																							
CR3100-23-4	ft	85	85	100	100	90				92 LB	in	9	4	15	21	23		18		24.5	13	26	
	m	26	26	30	30	27				42 KG	mm	229	102	381	533	584		457		622	330	660	
CR3100-25-4	ft	95	100	100	100	100				97 LB	in	9	4	15	21	25		18		26.5	14	27	
	m	29	30	30	30	30				44 KG	mm	229	102	381	533	635		457		673	356	686	
CR3100-31-4	ft	120	120	130	130	130				118 LB	in	9.25	4	20	30	31		19		33	17.5	34.5	
	m	37	37	40	40	40				54 KG	mm	235	102	508	762	787		483		838	445	876	
Hand Crank / Motor Driven Reels																							
CR2400-23-12	ft	1900	930	775	520	430	240	155	105	72 LB	in	18	12	11.25	21	23	23	29	29	24.5	13		
	m	579	283	236	158	131	73	47	32	33 KG	mm	457	305	286	533	584	584	737	737	622	330		
CR2400-31-8	ft	2700	1350	1100	750	660	360	185	135	79 LB	in	14	8	11.25	24	31	31	25	25	32.5	17		
	m	823	411	335	229	201	110	56	41	36 KG	mm	356	203	286	610	787	787	635	635	826	432		

Heavy Duty Cord and Cable Storage Reels

Hand Crank, Bevel Crank & Motor Driven

Keep long lengths of expensive electrical cord off the ground and out of harm's way with Reelcraft's expanded Series 30000 line, which includes cable storage reels and live power cord. The reels are designed to handle long lengths of 10/3, 12/3 and 16/3 cable.

Reelcraft's Series 30000 storage reels and live power cord reels are constructed of heavy gauge steel and are assembled with vibration-proof, self-locking fasteners to ensure assembly integrity. They undergo a five-stage cleaning process and are individually powder-coated for the highest quality, corrosion-resistant paint adhesion. Suited for indoor, non weather-tight applications only.

Cord/Cable Storage Reels

Cord and cable storage reels are used for storage, unwinding, and winding of conductive cord/cable. The reel is not intended to be live and the power source must be disconnected while reeling/de-reeling to avoid twisting the wires. Series 30000 cable storage reels are available in hand crank only.

Live Power Cord Reels

Live power cord reels have collector rings that allow the reel to wind/unwind the cord/cable with live current without twisting the wires. Live reels offer the advantage of using a reel as an effective piece of operating equipment rather than a simple device for the storage of cable or cord. Series 30000 live power cord reels are available in direct hand crank, bevel gear crank or electric motor-driven rewind.

New!




CA30112-CS
Cable not included.

New!



LE312 123 12D

**Made
in USA**

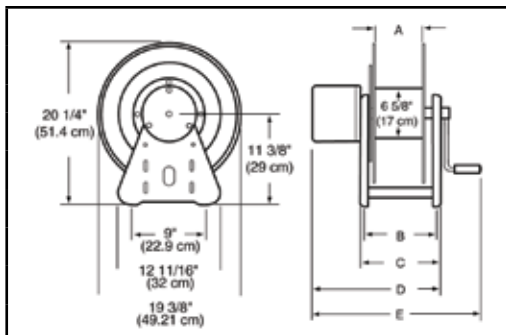

Dimensions - Size Index										
No.	1		2		3		4		5	
	in / mm		in / mm		in / mm		in / mm		in / mm	
A	6	152	12	305	12	305	12	305	12	305
B	9 ³ / ₄	248	15 ³ / ₄	400	15 ³ / ₄	400	15 ³ / ₄	400	15 ³ / ₄	400
C	11	280	17	432	17	432	17	432	17	432
D	N/A		N/A		23 ³ / ₄	603	23 ³ / ₄	603	23 ³ / ₄	603
E	19	483	25	635	29 ³ / ₈	746	29 ³ / ₈	746	25	635

Four 1/2" diameter mounting holes.

Model without Cable & bumper	Drive Type	Cord Specifications				Volts	Amps	Shipping Weight		Size Index #	
		AWG / mm²	# Cond.	ft / m				lbs / kg			
CA30106-CS*	Hand Crank	10	5.211	3	140	43	This reel is for storage only. Not intended to be live.		37	17	1
		12	3.131	3	175	53					
		16	1.0524	3	425	130					
CA30112-CS*	Hand Crank	10	5.211	3	280	86	This reel is for storage only. Not intended to be live.		46	21	2
		12	3.131	3	350	106					
		16	1.0524	3	850	260					
LB312 123	Bevel Crank	12	3.131	3	200	61	600	25	51	23	3
LB312 103	Bevel Crank	10	5.211	3	200	61	600	30	52	24	3
LC312 123	Hand Crank	12	3.131	3	200	61	600	25	50	23	4
LC312 103	Hand Crank	10	5.211	3	200	61	600	30	51	23	4
LE312 123 12D	Motor Driven**	12	3.131	3	200	61	600	25	68	31	5
LE312 103 12D	Motor Driven**	10	5.211	3	200	61	600	30	69	31	5

NOTE: Cord must be fully unspooled before use. Actual fill capacities vary with cord O.D. and jacket type. Consult manufacturer for applications requiring cord types other than SO, SOW, or SJO. Reel suited for indoor, non-weather tight applications only. *Power source must be disconnected while reeling/de-reeling. Through shaft on cable storage reels facilitates cable sizes up to .969" O.D. for other sizes, consult manufacturer. **All motor driven models are 12 volt DC non-explosion proof. Other motor options available upon request.

Available Options

Roller Guides
See page 47



Switches & Motors
See page 48



Replacement Bumpers
See page 49



Complete Welding Series | Series TW / STW / BA

Most Compact

Ideal for locations where space is limited



TW5425 OLP



Most Popular

Spring driven for hose lengths up to 60'



BA36106 L

TW7450 OLP



Bevel Crank

Longest hose lengths up to 250'

Model with Hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	Hose Outlet in	Reel Inlet in	Hose Length ft / m	Model without hose & bumper	Shipping Weight lbs / kg	Size Index #
Oxygen / Acetylene Hose Reels										
CA TW5425 OLP	26 12	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	25 8	TW5400 OLP	21 10	1
IN STW3450 OLP	29 13	300 21	1/4 6	.530 13	9/16-18(F)	9/16-18(M)	50 15	-----	-----	See pg. 21
CA TW7450 OLP	50 23	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	50 15	TW7400 OLP CA	42 19	2
TW7460 OLP	55 25	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	60 18	TW7400 OLP CA	42 19	2
Series 30000 Hand Crank	200 14	1/4 6	.530 13	9/16-18(M)	9/16-18(M)	125 38	BA36106 L	50 23		4
Series 30000 Hand Crank	200 14	1/4 6	.530 13	9/16-18(M)	9/16-18(M)	250 76	BA36112 L	57 26		5
Welding Gas (T-Grade) Hose Reels										
IN TW5425 OLPT	26 12	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	25 8	TW5400 OLPT	22 10	1
IN TW7450 OLPT	50 23	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	50 15	TW7400 OLPT	43 20	2
CA TW7460 OLPT	55 25	200 14	1/4 6	.530 13	9/16-18(F)	1/4 NPT(F)	60 18	TW7400 OLPT	43 20	2
CA TW84100 OLPT	101 46	200 14	1/4 6	.530 13	9/16-18(F)	9/16-18(F)	100 30	TW84000 OLPT	81 37	3
CA TW86075 OLPT	99 45	200 14	3/8 10	.625 16	9/16-18(F)	9/16-18(F)	75 23	TW86000 OLPT	86 39	3

Acetylene and fuel gas (red) inlet 1/4" FPT / oxygen (green) inlet 1/4" FPT. 9/16-18 models above are B size. Acetylene/fuel gas side has a LH thread and the oxygen side has a RH thread. Models supplied less hose have male outlets. Max temperature 150° F (65° C).

Inlet Hose Assemblies

Part Number	Hose I.D. in / mm	Length ft / m	End Fittings in / mm	Pressure psi / bar	Weight lbs / kg
Twin Welding Oxygen/acetylene (RM grade)					
S600100-2	1/4 dual 6	2 .61	9/16-18 LH/RH(F)	200 14	.70 .32
S600100-4	1/4 dual 6	4 1.22	9/16-18 LH/RH(F)	200 14	1.12 .51
S600100-6	1/4 dual 6	6 1.83	9/16-18 LH/RH(F)	200 14	1.90 .86
Twin Welding Other gases (T-grade)					
S601031-2	1/4 dual 6	2 .61	9/16-18 LH/RH(F)	200 14	.70 .32
S601031-4	1/4 dual 6	4 1.22	9/16-18 LH/RH(F)	200 14	1.12 .51
S601031-6	1/4 dual 6	6 1.83	9/16-18 LH/RH(F)	200 14	1.90 .86

Hose Inlet Connecting Fittings - Optional

Model No.	Inlet Connection Fittings
90°	S300090 ACETYLENE B size 9/16 - 18 LH (M) x 1/4" NPT (M)
	S300091 OXYGEN B size 9/16 - 18 RH (M) x 1/4" NPT (M)
Straight	261371 OXYGEN B size 9/16 - 18 RH (M) x 3/8" NPT (M)
	261372 ACETYLENE/fuel gas - B size 9/16 - 18 LH (M) x 3/8" NPT (M)

Hose supplied on oxygen/acetylene reels is twin-Siemese type meeting R.M.A. and C.G.A. type V.D., grade RM specifications.

Hose Assemblies

Part Number	I.D. & O.D. in / mm	Length ft / m	Pressure psi / bar	NPTF(M) End Fittings in	Weight lbs / kg
TWIN WELDING Oxygen-acetylene (RM grade) - LH/RH(F)					
601032-25	1/4 6	25 8	200 14	9/16-18	6.5 3.0
601032-50	1/4 6	50 15	200 14	9/16-18	12.1 5.5
601032-60	1/4 6	60 18	200 14	9/16-18	13.3 6.0
601032-100	1/4 6	100 30	200 14	9/16-18	24.2 11.0
TWIN WELDING Other gases (T-grade) - LH/RH(F)					
601031-25	1/4 6	25 8	200 14	9/16-18	6.5 3.0
601031-50	1/4 6	50 15	200 14	9/16-18	12.1 5.5
601031-60	1/4 6	60 18	200 14	9/16-18	14.4 6.50
601031-100	1/4 6	100 30	200 14	9/16-18	24.2 11.0

Caution: Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

NOTE: Reels without hose, Series TW5400 OLP(T), TW7400 OLP(T), TW84000 OLPT and TW86000 OLPT are U/L listed #70H2.

Features

- ✓ Designed to improve safety in the work area with an increase in productivity and efficiency
- ✓ Full flow shaft swivels
- ✓ Independent dual swivel body manufactured from aluminum and hard-coated for wear resistance assures positive separation of gases due to its unique design
- ✓ Double-sealed, O-rings prevent leakage
- ✓ Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation
- ✓ Durable abrasion and corrosion resistant baked-on red powder-coated finish
- ✓ Reel frame, spool and drum are fabricated of heavy gauge steel
- ✓ Temperature operating range - 20° F / -29° C to +250° F / +120° C

Economical
Lighter weight
for hose lengths
up to 50'

STW3450 OLP
*See page 21 for
additional details.
Made in Australia




High Volume
Dual welding,
spring driven
for high volume
of gas

TW84100 OLPT
Available in T grade only



Made in USA



**Dual swivel is
an exclusive
Reelcraft design**

Independent dual
swivel body

manufactured from aluminum and hard coated for wear resistance. Assures positive separation of gases due to its unique design.

Double - sealed, special molded O-rings prevent leakage. Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation. Available with TW5000 and TW7000 series reels.

"T" Grade Fuel Gas Reels

"T" grade hose reels are used for a wide variety of gases such as mapp gas, propane gas, natural gas and fuel gases. When ordering any welding hose reels you must specify the type of gas being used. To order "T" Grade reels, add a suffix "T" to the TW Models. Example - TW 5425 OLPT.

Series 5000 / 7000 / 80000						
No.	1	2	3			
	in / mm	in / mm	in / mm			
A	14 1/2 368	20 1/4 514	25 3/8 645			
B	13 3/4 349	19 483	24 610			
C	9 3/4 248	7 7/8 200	10 254			
D	2 1/2 64	3 7/8 98	6 152			
E	6 152	7 178	13 330			

Series 5000 reels have four 5/16" (8mm) diameter mounting holes. Series 7000 and 80000 reels have four 1/2" (12.7mm) mounting holes.

Series 30000				
No.	4	5		
	in / mm	in / mm		
A	15 5/8 397	21 5/8 550		
B	6 152	12 305		
C	9 3/4 248	15 3/4 400		
D	11 280	17 432		

Four 1/2" (12.7mm) mounting holes. Overall length with crank handle removed is 17 3/4" (451mm).

**Available
Options**

**Mounting
Brackets**
See page 47



**Inlet Hose
Assemblies**
See page 42



**Replacement
Bumpers**
See page 49



**Replacement
Hoses**
See page 42






CEA30006

Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC

- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 AMP, 90V DC (maximum) rated enclosed slip ring
- Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/Asc Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization

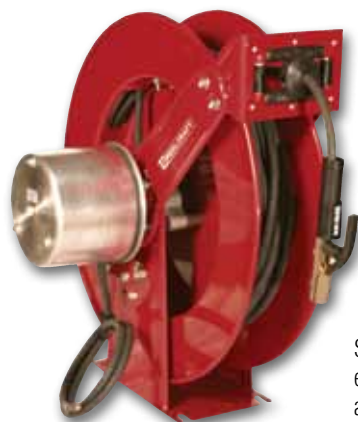

WC80001

Shown with electrode, clamp and cable (not included)



WC7000

Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

Dimensions - Size Index				
No.	1		2	
	in / mm		in / mm	
A	20 1/4	514	25 3/8	645
B	19	483	24	610
C	7 7/8	200	10	254
D	3 7/8	98	6	152
E	13 1/4	337	16	406

Four 1/2" (12.7mm) diameter mounting holes.

Dimensions - Size Index				
No.	3		4	
	in / mm		in / mm	
A	6	152	12	305
B	9 3/4	248	15 3/4	400
C	11	279	17	432
D	15	381	21	533
E	21	533	27	686

Four 1/2" (12.7mm) diameter mounting holes.

Available Options

Mounting Brackets
See page 47



Replacement Bumpers
See page 49



Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.



Model without cable & bumper	Cable Size				Shipping Weight		Size Index #
	#2 (31mm ²)	#1 (39mm ²)	#1/0 (50mm ²)	#2/0 (62mm ²)			
CEA30006	300 91	250 76	200 61	150 46	46 21		3
CEA30012	500* 152	500* 152	400 122	300 91	54 24		4
WC7000	-----	50 15	50 15	50 15	58 26		1
WC80001	-----	75 23	75 23	75 23	102 46		2
WC80002	-----	100 30	-----	-----	104 47		2

*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel.

Hand Crank Reels

Up to 150' fuel gas
Up to 200' 12/3 cable



Ideal for applications where space, weight and flexibility are key, these reels are designed for manual winding of air/water/fuel gases hose, electric cord and welding cable. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of hose or cord.



Dual Spool

Side-by-side combinations

T-2462-0


Dual Spool

Stacked combinations
T-2464-0



Model without cable	AMP	Reel Capacity ft / m	Shipping Weight lbs / kg	Cable AWG/Cond	Size Index #
Single Welding Cable 600 V, 2/0 Cable					
T-1460-0 CA	250	200 61	32 15	-----	2
Single Power Cable - 3 Conductor					
T-1535-003	30	150 45	18.5 5	8 / 3	1
T-1535-083-100*	33	100 30	50 23	8 / 3	1
T-1535-103-200*	24	200 61	81 37	10 / 3	1
T-1535-123-100*	25	100 30	46 21	12 / 3	1
T-1535-123-200*	20	200 61	71 32	12 / 3	1

*Includes cable.

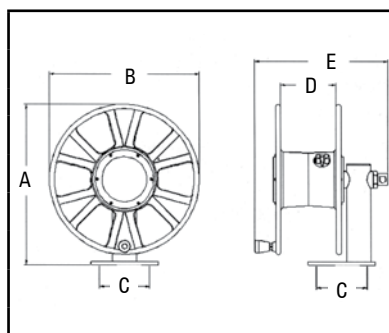

Dimensions - Size Index				
No.	1	2	3	
	in / mm	in / mm	in / mm	
A	19 483	19 483	19 483	
B	18 457	18 457	18 457	
C	6 152	6 152	6 152	
D	6 1/2 165	6 1/2 165	12 1/2 165	
E	15 3/4 401	16 1/4 412	21 3/4 552	

Four 1/2" diameter mounting holes.

Model without hose	Shipping Weight lbs / kg	Pressure psi / bar	Hose I.D. in / mm	Hose O.D. in / mm	Reel Capacity ft / m	Size Index #
Single Spool Air / Water Hose Reels Maximum Temperature 150° F (65° C)						
T-1115-08	18 8	300 21	1/2 13	.844 21	150 46	1
T-1116-08	22 10	300 21	1/2 13	.844 21	250 76	3
T-1117-12	18 8	250 17	3/4 19	1.188 30	50 15	1
T-1118-12	22 10	250 17	3/4 19	1.188 30	75 23	3
Single Spool Oxygen/Acetylene T-Grade Seals Maximum Temperature 150° F (65° C)						
T-1225-04 CA	19 9	200 14	1/4 6	.530 13	150 45	2
T-1225-04-100T*	44 20	200 14	1/4 6	.530 13	100 30	2
T-1226-06	19 9	200 14	3/8 10	.625 16	100 30	2

*Includes hose.

Single Spool



T-1225-04-100T

Detail of heavy duty shaft

with tapered roller bearing for high rigidity



Shaft sizes are 1 to 1.25" in diameter, supported by tapered roller bearings with 2 to 2.3" housings.

Model without cable	AMP	Reel Capacity ft / m	Shipping Weight lbs / kg	Size Index #
Dual Side-by-Side Welding Cable (2) 600 V, 2/0 Cable				
T-2462-0	250	200 61	51 23	5
Dual Stacked Welding Cable (2) 600 V, 2/0 Cable				
T-2464-0	250	200 61	62 28	4
Dual Side-by-Side Power Cable / Air Hose				
T-2735-2-0*	35	200 150 61 45	40 18	5

*Air hose side has 1/2" (12.7mm) inlet.

Dimensions - Size Index				
No.	4	5		
	in / mm	in / mm		
A	38 965	19 483		
B	18 457	18 457		
C	6 152	6 152		
D	6 1/2 165	6 1/2 165		
E	16 1/4 737	29 737		


Four 1/2" diameter mounting holes.

Caution: Compressed air hoses should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. Oxygen/Acetylene cannot be combined with welding cable or power cord. **Note:** Models listed are without hose and/or cable except where listed. Weights listed above are actual product weight without packaging materials. Safe-T-Reels are available with cable or hose and in various combinations. Please consult Reelcraft customer service for additional information.

Top Five Benefits

1. Balances the weight of assembly tools, making them nearly weightless
2. Reduces operator fatigue
3. Improves safety and ergonomics
4. Increases productivity by keeping tools positioned for immediate use with minimal operator motion
5. Reduces tool damage by preventing tools from being accidentally dropped

TB 1-5 Dimensions

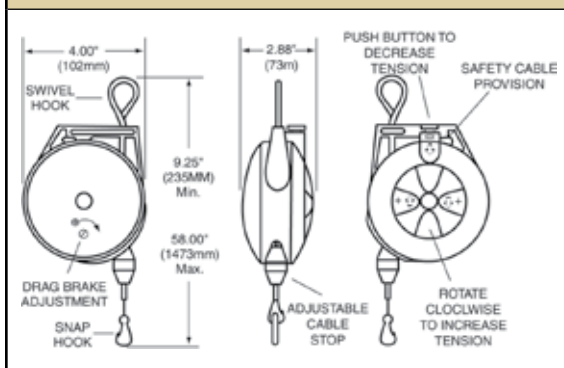

Model	Min - Max Load		Cable Length*		Shipping Weight	
	lbs	kg	ft	m	lbs	kg
TB 01	0.0 - 1.5	0.0 - 0.7	6	1.8	1.0	0.5
TB 03	1.5 - 3.0	0.7 - 1.4	6	1.8	1.0	0.5
TB 05	3.0 - 5.0	1.4 - 2.3	6	1.8	1.5	1

*Cable lengths listed are "active" or "working" cable. Safety tool clip and cable stop included. Maximum temperature 150° F (65° C).



Model	Min - Max Load		Cable Length*		Shipping Weight		Ratchet Lock
	lbs	kg	ft	m	lbs	kg	
Constant Pull Reels - may be adjusted to balance through 6-18 in. (152-457mm) range.							
TB 10	5.0 - 10	2.3 - 4.5	8	2.4	9	4	NO
TB 12	8.0 - 12	3.6 - 5.4	8	2.4	10	4.5	NO
TB 15	10 - 15	4.5 - 6.8	8	2.4	10	4.5	NO
TB 23	16 - 23	7.2 - 10.4	8	2.4	10	4.5	NO




Reels with Ratchet Lock - retract tool upward when manually released.							
TBL 10	5.0 - 10	2.3 - 4.5	8	2.4	9	4	YES
TBL 12	8.0 - 12	3.6 - 5.4	8	2.4	10	4.5	YES
TBL 15	10 - 15	4.5 - 6.8	8	2.4	10	4.5	YES
TBL 23	16 - 23	7.2 - 10.4	8	2.4	10	4.5	YES

*Cable lengths listed are "active" or "working" cable. Safety tool clip and cable stop included. Maximum temperature 150° F (65° C).



Tool balancers make tools nearly weightless, reduce fatigue

TB 10-23 Dimensions

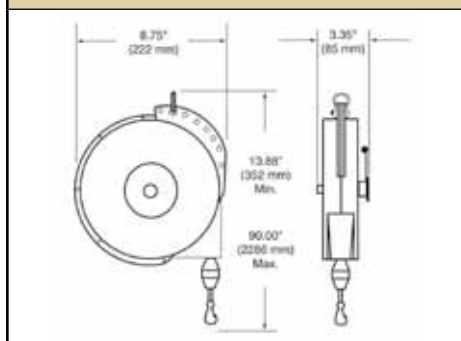

Optional Accessories

Cables can be combined for added length

Overhang Cable


Model No.	Length
600605-3	3.0 ft / 91.5 cm
600605-5	5.0 ft / 152.4 cm

Safety Cable/Chain


Model No.	Length
600603*	1.0 ft / 30.5 cm
600604**	1.0 ft / 30.5 cm

*Nylon covered steel cable (1 to 6 lbs models)

**Steel link chain (10 to 23 lbs models)



Strongly recommended, secondary steel cable or steel link chain. Prevents balancer from accidental fall. Balancers have extra holes for cable or chain.

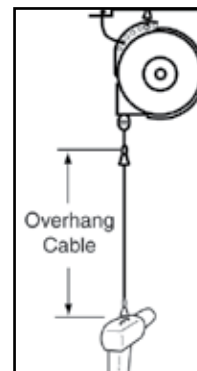

Nylon covered steel cable with safety clip. Brings tools closer to work area without unwinding cable from reel or mounting reel at lower height.

Roller Hose Guide Assemblies



HR 1057






HR 1145



600168






Model	Accommodates	Weight	Dimensions							
	Hose O.D.		A		B		C		D	
	in (mm)		in / mm	in / mm	in / mm	in / mm	in / mm	in / mm	in / mm	in / mm
HR1057	.603 (16) - .906 (23)	.25 .12	0.875 22.3	3.125 79.4	3.125 79.4	1.6875 29.8	1.6875 29.8	1.6875 29.8	N/A	N/A
HR1059	.250 (6.4) - .625 (15.9)	.25 .12	0.625 15.9	3.125 79.4	3.125 79.4	1.6875 29.8	1.6875 29.8	1.6875 29.8	N/A	N/A
HR1145	.603 (16) - .906 (23)	.34 .15	2 50.8	1 25.4	3.75 95.3	2.75 69.9	2.125 54.1	3.125 79.4		
S270109	.900 (23) - 2.00 (50.8)	5.39 2.44	5.25 133.4	2.375 60.4	12 305	8 204	5 127	10.5 267		
600168	.900 (23) - 1.38 (35)	1.75 .34	1.75 44.5	2.0625 27	5.125 130	5.125 130	4 102	4 102		

These four-way roller guide assemblies are for use with reels on cabinet door openings and for similar locations where sharp edges may cut or damage the hose. The four-way design permits pulling or retracting hose at any angle. Model S270109 has nylon rollers mounted on an 11 gauge steel frame with pre-drilled mounting holes.





Note: A hose bumper should be used with the four-way roller hose guide assemblies to prevent damage to rollers and nozzles. See chart on page 49.

Additional Accessories

	340° Pivot Base Aligns reel to the direction of hose or cord run. May be mounted with reel upright or hanging. Weight 10 lbs. (5kg). Note: Use if hoses or cords are pulled at more than 45°.	For Reel Series RT / 4000 / 5000 / 5005 / 7000	Part # 600608
		80000 / D80000 / 30006	600801
		30012	600801-12
 	Wall-Mounted Universal Swing Bracket Bracket will pivot approximately 180°. All steel construction with a durable baked on powder coat finish. Weight 6 lbs (3kg). Note: Use if hoses or cords are pulled at more than 45°. Note: Not for overhead mounting.	For Reel Series RT	Part # 600992
		4000 / 5000	600993
		RT / 4000 / 5000 / 5005 / 7000	600626
		80000 / D80000 / DP7000	600980
 	Top Mounting Channels and Beam Clamps 600370 Top channel and beam clamps -for one reel 600295 Top channel and beam clamps -for two reels For mounting Series 4000 through 7000 reels to I-beam or overhead support. Mounting channels can be mounted end to end to mount three or more reels. (See Adaptor Assembly)		
	600230 Adaptor Assembly Channels are designed to accommodate Series 7000 reels. Adaptor #600230 permits the mounting of Reelcraft Series RT, 4000, 5000, 5005 and electric cord reels on mounting channel. Used with top channels and beam clamps only.		
	Additional Series 30000 Accessories S600812 Battery Box Battery not included. Supplied with mounting hardware. Inside dimensions = 9" Height x 14" Width x 7.5" Depth 600814 Battery Cable Connector Battery not included. See page 48 for switches, motors and chain guards, page 49 for inlet hoses and page 50 for replacement hoses.		

Roller Guide Assemblies

			
<p>Spools and blocks are chrome-plated to resist corrosion and abrasion. Rollers speed handling and reduce wear on hose. All painted parts are finished with durable abrasion resistant baked-on powder coat. Delrin bearing surfaces give a quiet operation with minimum wear and all features combine to give trouble-free maximum service life.</p>			
<p>For the special UHMW composite rollers, add a "U" at the end of the part number. (Example: S600693-1U)</p>			
Hose Reel Spool Size	Bottom Wind Roller bracket assembly model number	Top Wind Roller bracket assembly model number	Multi Position Roller bracket assembly model number
in / mm			
Series 30000 - Four Way Rollers			
6 152	S600693-1	S600692-1	S600533-1
12 305	S600693-2	S600692-2	S600533-2
18 457	S600693-3	S600692-3	S600533-3
22 559	S600693-4	S600692-4	S600533-4
28 711	S600693-5	S600692-5	S600533-5
Series 30000 - Three Way Rollers			
6 152	S602132-1	S602133-1	
12 305	S602132-2	S602133-2	
18 457	S602132-3	S602133-3	
22 559	S602132-4	S602133-4	
28 711	S602132-5	S602133-5	
<p>Bottom wind and top wind may be used with all models except bevel crank. Multi position may not be used on models with a chain guard or 37000 series reels.</p>			

Bottom wind and top wind may be used with all models except bevel crank. Multi position may not be used on models with a chain guard or 37000 series reels.

Operating Switches


Part No.	Specification	Use with motor
Push Button Switch		
S600870	115/230 VAC, 10 AMP fuse	S260430
600811	12/24 VDC, up to 1/3 HP, breaker and relay	S260409, 260450
S600808	600811 switch with bracket, 12/24 VDC	S260409, 260450
600869	12/24 VDC, up to 2/3 HP	S260583, S260626
260424	Momentary contact with rubber cap, 12/24 VDC, non-explosion proof	Any DC motor
260425	Momentary contact, class 1 group D, for 115/230 VAC rewind motor. May also be used with solenoid for 12 or 24 VDC.	Any explosion proof motor

Part No.	Specification	Use with motor
Speed Control Switch		
600871	115/230 VAC, 10 AMP	S260430
600866	12/24 VDC	S260409, S260583, 260450, S260626

Part No.	Specification	Use with motor
Push Button Switch with Speed Control		
S600872	115/230 VAC, 10 AMP fuse, adjustable speed control	S260430
600873	115/230 VAC, 10 AMP fuse, forward/reverse adjustable speed control	
600867	DC, 25 AMP, up to 1/3 HP	S260409
600868	DC, 40 AMP circuit breaker, up to 2/3 HP	S260583

Switch Accessories

Part No.	Specification
Circuit Breaker	
S260422	40 AMP. Use with DC electric rewind motors. Manual reset button must be pressed firmly to reset.
Starting Solenoid	
S260426	12 VDC for activation of motor.
Mounting Bracket	
260532	Combination for circuit, solenoid and starting switch.
Junction Box	
370200	For explosion proof motor.



Rewind Motors

Reels are equipped with electric or compressed air motors to drive chain and sprocket rewind mechanisms.

Part No.	Specification
Electric Motors	
S260409	Reversible type, 12 VDC 1/3 HP
260450	Reversible type, 24 VDC 1/3 HP

Part No.	Specification
Explosion Proof Electric Motors	
S260430	Reversible type, single phase, explosion proof, Class 1 Group D Division 1, 115 VAC 1/2 HP. An explosion proof, Class I Group D junction box is available for wiring A.C. motors - #370200
S260626	24 VDC 2/3 HP. Electric motor reversible type. Explosion proof.
S260583	12 VDC 2/3 HP. Electric motor reversible type. Explosion proof.

Part No.	Specification
Hydraulic Motor	
370066	1021 RPM, 668 lb-in, 2400 psi, 2.2 in ³ intermittent 1800 psi continuous.

Part No.	Specification
Air Motors	
260428	4 AM delivers up to 1 1/2 horsepower, 1/4" N.P.T. (F) inlet.
260429	6 AM delivers up to 4 horsepower, 1/2" N.P.T.F. (F) inlet.

Additional Accessories

Part No.	Specification
Chain Shrouds	
S600518	Optional chain shroud for Series 30000 and Series 1200 reels.
S261746	Optional chain shroud for Series 40, 2400, 3700 and 3900 reels.

Part No.	Specification
Control Valves	
260454	Pneumatic on/off flow control valve assembly, 1/4" N.P.T. (F) inlet and outlet to be used with 4 AM compressed air motors. We also recommend using a filter, regulator, and lubricator with compressed air motors.
260455	Same as above with 3/8" N.P.T.F. (F) inlet and outlet, to be used with 6 AM motors.


*Reference reelcraft.com for detailed specifications.



Adjustable Hose Bumpers

Adjustable hose bumpers are solid molded rubber assuring a long life and nonslip grip. Hose bumpers allow the desired length of hose to be permanently stored outside the reel. Hose bumpers are included on the reels purchased with hose. Reels purchased without hose do not include the hose bumper. When ordering, advise the part number, reel model and the hose I.D. and O.D. **NOTE: To order hose bumper with stainless steel hardware, change part number prefix from HR to HS.**

For Reel Series	Part Number	Hose O.D. (dia A) in (mm)	Hose I.D. in / mm	Dia. B-C-E in / mm	Dia. D in / mm	Weight lbs / kg
4000 / 5000 / RT400 / 3100 6000 / L4500 / L5000 / DP	1-HR1004-A	.438 (11) - .625 (16)	1/4 6	2.5 64	1.25 32	.24 .10
4000 / 5000 / D8000 / RT400 RT600 / 6000	1-HR1004	.625 (16) - .749 (19)	3/8 10	2.5 64	1.25 32	.25 .11
7000 / 80000 / E8000 / 3100 RT800 / 5000 / D80000 / DP	1-HR1004-3	.625 (16) - .749 (19)	3/8 10	3 73	1.25 32	.24 .10
5000 / A5005 / 7000 / 80000 D8000 / E8000 / RT800 / DP	2-HR1004-3	.750 (19) - 1.05 (27)	1/2 or 3/8 13 or 10	3 73	1.25 32	.23 .10
7000 / 8000 / D8000 / 80000 GC7000 / F7000 / F80000 / L7000 / DGM	3-HR1004-3	1.06 (27) - 1.38 (35)	3/4 19	3 73	1.25 32	.32 .14
TW5000 / TW7000 / 3100T TW80000 / TWD80000	8-HR1004-3	.530 (13) twin	1/4 twin 6	3 73	1.25 32	.24 .10
TH80000 / TW80000 / 3100T TH7000 / TW8000	600521	.680 (17) twin	3/8 twin 10	3.5 89	2 51	.45 .20
3100T / 4800T / TH80000	600522	.810 (21) twin	1/2 twin 13	3.5 89	2 51	.49 .22
D9000 / E9000 / 3100 / 4800	2-HR1005	.750 (19) - 1.05 (27)	1/2 13	3.5 89	2.875 73	.95 .43
D9000 / E9000 / FE9000 / 3100 / 4800 / SD	3-HR1005	1.06 (27) - 1.38 (35)	3/4 19	3.5 89	2.875 73	.95 .43
D80000 / D8000 / D9000 / E9000 / FD9000 / FE9000 / 3100 / 4800 / SD	4-HR1005	1.39 (35) - 1.55 (39)	1 25	3.5 89	2.875 73	.81 .36
FE9500 / FF9500 / 4800	S600547-1	1.55 (39) - 1.75 (44)	1 1/4 32	3.75 95	2.875 73	.70 .31
FE9600 / FF9600 / 4800	S600547-2	1.75 (44) - 2.03 (52)	1 1/2 38	3.75 95	2.875 73	.57 .25



Inlet Hose Assemblies

A flexible hose connection must be used between the hose reel inlet and the source of supply to prevent possible misalignment and binding or warranty is void. Please furnish the following information when ordering: Part number, product and pressure to be handled. Other sizes available as well. **NOTE:** Swivel fittings are recommended to protect hose during installation.

Part Number	Hose I.D. in / mm	Hose O.D. in / mm	Length ft / m	End Fittings in / mm	Pressure psi / bar	Weight lbs / kg
Low Pressure Air and water - PVC Nylon Braid						
S601024-2	3/8 10	.600 15	2 .61	3/8 x 3/8 NPTF(M)	300 21	.54 .24
S601020-2	1/2 13	.750 19	2 .61	1/2 x 1/2 NPTF(M)	300 21	.70 .32
601026-2	3/4 19	1.075 27	2 .61	3/4 x 3/4 NPTF(M)	250 17	1.50 .68
601034-3	3/4 19	1.075 27	3 .91	3/4 x 3/4 NPTF(M)	250 17	1.72 .78
601026-7	3/4 19	1.075 27	7 2.13	3/4 x 3/4 NPTF(M)	250 17	3.00 1.36
S601027-2	1 27	1.375 35	2 .61	3/4 x 1 NPTF(M)	300 21	1.72 .78
601027-5	1 27	1.375 35	5 1.52	3/4 x 1 NPTF(M)	300 21	3.25 1.47
Medium Pressure Oil and petroleum fluids - 100 R1T 1 Wire Braid						
32-260043	3/8 10	.710 18	2 .61	3/8 x 3/8 NPTF(M)	2250 155	1.00 .45
S17-260043	1/2 13	.850 22	2 .61	1/2 x 1/2 NPTF(M)	2000 138	.91 .41
39-260043	1/2 13	.850 22	5 1.52	1/2 x 1/2 NPTF(M)	2000 138	2.00 .91
High Pressure Chassis grease - 100 R2T 2 Wire Braid						
S17-260044	1/4 6	0.580 15	2 .61	1/4 x 1/4 NPTF(M)	5000 345	.75 .34
S14-260044	3/8 10	0.730 19	2 .61	3/8 x 1/2 NPTF(M)	4000 276	.83 .38



Replacement Hose Assemblies Partial List

Part Number	I.D. in	O.D. in	Length ft	Pressure psi	End Fittings in - NPTF(M)	Wgt. lbs
Low Pressure Air and water - PVC Nylon Braid						
601001-20	1/4	.475	20	300	1/4 x 1/4	2.60
601001-25	1/4	.475	25	300	1/4 x 1/4	3.00
601001-35	1/4	.475	35	300	1/4 x 1/4	3.20
601001-50	1/4	.475	50	300	1/4 x 1/4	5.00
601013-15	3/8	.600	15	300	1/4 x 1/4	3.10
S601013-25	3/8	.600	25	300	1/4 x 1/4	4.50
S601013-35	3/8	.600	35	300	1/4 x 1/4	4.70
S601013-50	3/8	.600	50	300	1/4 x 1/4	6.00
601014-40	3/8	.600	40	300	1/4 x 1/2	6.00
601014-100	3/8	.600	100	300	1/4 x 1/2	15.00
601017-50	3/8	.600	50	300	1/4 x 1/2	6.00
601017-70	3/8	.600	70	300	1/4 x 1/2	7.90
601015-15	3/8	.600	15	300	3/8 x 1/2	3.00
601015-50	3/8	.600	50	300	3/8 x 1/2	6.50
601015-75	3/8	.600	75	300	3/8 x 1/2	8.00
601015-100	3/8	.600	100	300	3/8 x 1/2	14.00
601021-30	1/2	.750	30	300	3/8 x 1/2	6.30
601021-35	1/2	.750	35	300	3/8 x 1/2	7.40
601021-50	1/2	.750	50	300	3/8 x 1/2	10.50
601022-35	1/2	.750	35	300	1/2 x 1/2	6.50
601022-50	1/2	.750	50	300	1/2 x 1/2	10.50
601035-75	1/2	.750	75	300	1/2 x 1/2	13.70
601022-100	1/2	.750	100	300	1/2 x 1/2	18.00
601026-20	3/4	1.075	20	250	3/4 x 3/4	5.90
601026-25	3/4	1.075	25	250	3/4 x 3/4	7.70
601026-30	3/4	1.075	30	250	3/4 x 3/4	9.00
601026-40	3/4	1.075	40	250	3/4 x 3/4	12.00
601026-50	3/4	1.075	50	250	3/4 x 3/4	15.00
601026-75	3/4	1.075	75	250	3/4 x 3/4	18.75
601026-100	3/4	1.075	100	250	3/4 x 3/4	22.60
601026-150	3/4	1.075	150	250	3/4 x 3/4	37.00
601026-200	3/4	1.075	200	250	3/4 x 3/4	58.00
601027-30	1	1.375	30	250	3/4 x 1	13.50
601027-40	1	1.375	40	250	3/4 x 1	17.70
601027-45	1	1.375	45	250	3/4 x 1	20.00
601027-50	1	1.375	50	250	3/4 x 1	21.80
Low Pressure Fuel - 4 Spiral Poly Yarn Braid						
600160-1	3/4	1.188	25	-----	3/4 x 3/4	17.50
600160-4	3/4	1.188	25	-----	3/4 x 3/4	24.50
600160-2	3/4	1.188	50	-----	3/4 x 3/4	35.00
600160-3	3/4	1.188	75	-----	3/4 x 3/4	52.50
600451-2	1	1.500	2	-----	1 x 1	1.70
600451-35	1	1.500	35	-----	1 x 1	30.00
600451-50	1	1.500	50	-----	1 x 1	42.00

Caution: Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

Part Number	I.D. in	O.D. in	Length ft	Pressure psi	End Fittings in - NPTF(M)	Wgt. lbs
Medium Pressure Oil and petroleum fluids - 100 R1T 1 Wire Braid						
13-260043	1/4	.530	20	2750	1/4 x 3/8	3.20
14-260043	1/4	.530	25	2750	1/4 x 3/8	4.00
20-260043	1/4	.530	30	2750	1/4 x 3/8	4.70
33-260043	1/4	.530	35	2750	1/4 x 3/8	5.20
43-260043	1/4	.530	50	2750	1/4 x 1/4	7.90
15-260043	3/8	.710	20	2250	3/8 x 3/8	4.90
12-260043	3/8	.710	25	2250	3/8 x 3/8	6.00
3-260043	3/8	.710	30	2250	3/8 x 1/2	11.70
16-260043	3/8	.710	30	2250	3/8 x 3/8	7.10
44-260043	3/8	.710	35	2250	3/8 x 1/2	8.00
4-260043	3/8	.710	40	2250	3/8 x 1/2	9.60
46-260043	3/8	.710	50	2250	3/8 x 1/2	10.20
5-260043	3/8	.710	50	2250	3/8 x 1/2	10.40
40-260043	1/2	.850	16	2000	1/2 x 1/2	7.40
21-260043	1/2	.850	25	2000	1/2 x 1/2	8.40
6-260043	1/2	.850	30	2000	1/2 x 1/2	8.90
37-260043	1/2	.850	35	2000	1/2 x 1/2	9.00
22-260043	1/2	.850	40	2000	3/8 x 1/2	22.00
7-260043	1/2	.850	40	2000	1/2 x 1/2	11.70
8-260043	1/2	.850	50	2000	1/2 x 1/2	14.10
24-260043	1/2	.850	75	2000	1/2 x 1/2	22.00
26-260043	3/4	1.120	30	1250	3/4 x 3/4	13.00
27-260043	3/4	1.120	50	1250	3/4 x 3/4	22.20
28-260043	3/4	1.120	75	1250	3/4 x 3/4	30.00
High Pressure Chassis grease - 100 R2T 2 Wire Braid						
6-260044	1/4	0.580	20	5000	1/4 x 1/4	5.20
10-260044	1/4	0.580	25	5000	1/4 x 1/4	6.40
7-260044	1/4	0.580	30	5000	1/4 x 1/4	7.70
20-260044	1/4	0.580	35	5000	1/4 x 1/4	9.00
8-260044	1/4	0.580	40	5000	1/4 x 3/8	10.20
9-260044	1/4	0.580	50	5000	1/4 x 3/8	12.70
13-260044	3/8	0.730	25	4000	1/4 x 1/4	9.70
25-260044	3/8	0.730	25	4000	3/8 x 3/8	9.70
3-260044	3/8	0.730	30	4000	1/4 x 3/8	10.72
24-260044	3/8	0.730	35	4000	3/8 x 3/8	12.40
26-260044	3/8	0.730	35	4000	3/8 x 1/2	12.40
4-260044	3/8	0.730	40	4000	1/4 x 3/8	15.40
5-260044	3/8	0.730	50	4000	1/4 x 3/8	19.20
27-260044	3/8	0.730	50	4000	3/8 x 3/8	20.70
19-260044	3/8	0.730	50	4000	3/8 x 1/2	20.90
23-260044	3/8	0.730	75	4000	3/8 x 3/8	25.00
18-260044	3/8	0.730	75	4000	3/8 x 1/2	26.60
22-260044	3/8	0.730	100	4000	3/8 x 3/8	33.00

Caution: Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

S = Spring Driven
H = Hand Crank
E = Electric Motor
* Without hose or cable
Note: Unless specified with an asterisk, all Quick Ship reels include hose or cord installed.

IN: Indiana Warehouse
CA: California Warehouse
CN: Canadian Warehouse

Same Day Quick Ship Reels

The models listed below can be shipped same day upon request when the order is received by 11:30am local time (or 11:00am Toronto time for Canada) for quantities of 5 or fewer. Applied to North American orders only. Further restrictions may apply.

Part Warehouse Capacity										Part Warehouse Capacity									
Pg#	Model #	CA	IN	CN	Size	Length	Rating	Drive	Description	Pg#	Model #	CA	IN	CN	Size	Length	Rating	Drive	Description
9	4420 OLP	X	X		1/4"	20'	300 psi	S	Air / Water	25	CA33118 L	X	X		3/4"	175'	1000 psi	H	Air / Water
9	4425 OLP	X	X	X	1/4"	25'	300 psi	S	Air / Water	25	CA37118 L	X	X	X	1"	100'	300 psi	H	Air / Water
9	4400 OLP			X	1/4"	35'	500 psi	S	Air / Water	25	CA32106 M	X			1/2"	100'	3000 psi	H	Medium Pressure
8	RT435-OLP	X	X		1/4"	35'	300 psi	S	Air / Water	25	CA32112 M	X	X	X	1/2"	200'	3000 psi	H	Medium Pressure
9	4435 OLP	X	X	X	1/4"	35'	300 psi	S	Air / Water	25	EA32112 L12D	X			1/2"	200'	1000 psi	E	Air / Water
8	RT450-OLP	X	X	X	1/4"	50'	300 psi	S	Air / Water	25	EA32118 L12D			X	1/2"	325'	1000 psi	E	Air / Water
9	5400 OLP	X	X	X	1/4"	50'	500 psi	S	Air / Water	25	EA33112 L12D		X		3/4"	100'	1000 psi	E	Air / Water
9	5450 OLP	X	X	X	1/4"	50'	300 psi	S	Air / Water	25	EA33118 L12D		X		3/4"	175'	1000 psi	E	Air / Water
8	RT625-OLP	X	X		3/8"	25'	300 psi	S	Air / Water	25	EA37118 L12D	X			1"	100'	300 psi	E	Air / Water
9	4625 OLP	X	X	X	3/8"	25'	300 psi	S	Air / Water	23	CT6050HN	X			3/8"	50'	5000 psi	H	Pressure Wash
9	4600 OLP	X		X	3/8"	25'	500 psi	S	Air / Water	23	CT6100HN	X			3/8"	100'	5000 psi	H	Pressure Wash
8	RT635-OLP	X	X		3/8"	35'	300 psi	S	Air / Water	23	CM6050HN	X			3/8"	50'	5000 psi	H	Pressure Wash
9	5600 OLP	X			3/8"	35'	500 psi	S	Air / Water	23	CM6100HN		X		3/8"	100'	5000 psi	H	Pressure Wash
9	5635 OLP	X	X	X	3/8"	35'	300 psi	S	Air / Water	22	H18006 M	X			3/8"	100'	5000 psi	H	Pressure Wash
8	RT605-OLP	X			3/8"	50'	300 psi	S	Air / Water	22	PW7650 OHP			X	3/8"	50'	5000 psi	S	Pressure Wash
8	RT650-OLP	X	X	X	3/8"	50'	300 psi	S	Air / Water	22	PW81000 OHP	X	X	X	3/8"	100'	5000 psi	S	Pressure Wash
21	SGA3650 OLP	X	X	X	3/8"	50'	232 psi	S	Air / Water	20	4625 OLPSW5		X		3/8"	25'	250 psi	S	Water
9	5605 OLP	X	X	X	3/8"	50'	500 psi	S	Air / Water	21	SCA3850 OLP			X	1/2"	50'	232 psi	S	Chemical
9	5650 OLP	X	X	X	3/8"	50'	300 psi	S	Air / Water	19	5600 OLS	X			3/8"	35'	500 psi	S	SS Air / Water
10	7650 OLP	X	X	X	3/8"	50'	300 psi	S	Air / Water	19	7800 OLS	X	X		1/2"	50'	500 psi	S	SS Air / Water
11	DP5650 OLP	X	X		3/8"	50'	300 psi	S	Air / Water	19	HS18000 M	X			1/2"	200'	3000 psi	H	SS Medium Pressure
11	DP7650 OLP	X	X		3/8"	50'	300 psi	S	Air / Water	19	7800 OMS	X			1/2"	50'	3000 psi	S	SS Medium Pressure
10	7600 OLP	X	X	X	3/8"	70'	500 psi	S	Air / Water	17	THA7600 OMP	X			3/8"	30'	3000 psi	S	Twin Hydraulic
10	7670 OLP	X	X		3/8"	70'	300 psi	S	Air / Water	17	TH88000 OMP	X		X	1/2"	50'	3000 psi	S	Twin Hydraulic
13	81100 OLP	X	X	X	3/8"	100'	300 psi	S	Air / Water	17	TH88050 OMP			X	1/2"	50'	2000 psi	S	Twin Hydraulic
8	RT825-OLP	X			1/2"	25'	300 psi	S	Air / Water	36	LD2040 163 2		X		16/3	40'	0.3 AMP	S	Electric Cord, Fluorescent
9	A5825 OLP	X	X	X	1/2"	25'	300 psi	S	Air / Water	36	LD2030 163 9		X		16/3	30'	10 AMP	S	Electric Cord, Triple Outlet
8	RT803-OLP	X			1/2"	35'	300 psi	S	Air / Water	36	LD2030 143 9		X		14/3	30'	13 AMP	S	Electric Cord, Triple Outlet
8	RT835-OLP	X	X		1/2"	35'	300 psi	S	Air / Water	36	LG3050 163 8		X		16/3	50'	10 AMP	S	Electric Cord, Fluorescent
11	DP5835 OLP	X			1/2"	35'	300 psi	S	Air / Water	36	LG3050 143 9		X		14/3	50'	13 AMP	S	Electric Cord, Triple Outlet
8	RT850-OLP	X	X	X	1/2"	50'	300 psi	S	Air / Water	36	LG3040 123 9		X		12/3	40'	15 AMP	S	Electric Cord, Triple Outlet
9	A5850 OLP	X	X	X	1/2"	50'	300 psi	S	Air / Water	36	LH2080 143		X		14/3	80'	10 AMP	H	Electric Cord, Quad Outlet
10	7800 OLP	X	X	X	1/2"	50'	500 psi	S	Air / Water	36	LH3100		X			100'	15 AMP	H	Electric Cord, Quad Outlet
10	7850 OLP	X	X	X	1/2"	50'	300 psi	S	Air / Water	38	L 4545 123 7	X	X	X	12/3	45'	15 AMP	S	Electric Cord, GFCI
11	DP7850 OLP	X	X		1/2"	50'	300 psi	S	Air / Water	38	L 5550 123 7	X	X		12/3	50'	20 AMP	S	Electric Cord, GFCI
12	D8850 OLP	X	X		1/2"	50'	300 psi	S	Air / Water	39	L 4050 163 1	X	X	X	16/3	50'	13 AMP	S	Electric Cord, Incandescent
13	82075 OLP	X			1/2"	75'	300 psi	S	Air / Water	39	L 4050 162 2	X	X		16/2	50'	0.3 AMP	S	Electric Cord, Fluorescent
13	82000 OLP	X	X	X	1/2"	100'	500 psi	S	Air / Water	38	L 7000		X			35'	45 AMP	S	Electric Cord
13	82100 OLP	X	X	X	1/2"	100'	300 psi	S	Air / Water	38	L 4545 123 3	X	X	X	12/3	45'	15 AMP	S	Electric Cord, Single Outlet
10	7925 OLP	X	X		3/4"	25'	250 psi	S	Air / Water	38	L 4035 163 3		X		16/3	35'	13 AMP	S	Electric Cord, Single Outlet
13	83000 OLP		X		3/4"	50'	500 psi	S	Air / Water	38	L 4050 163 3	X	X	X	16/3	50'	13 AMP	S	Electric Cord, Single Outlet
13	83050 OLP	X	X	X	3/4"	50'	250 psi	S	Air / Water	38	L 5550 123 3	X	X		12/3	50'	15 AMP	S	Electric Cord, Single Outlet
13	D83075 OLP	X			3/4"	75'	250 psi	S	Air / Water	18	F7900 OLP	X			3/4"	25'	500 psi	S	Fuel
13	D84000 OLP			X	1"	50'	500 psi	S	Air / Water	18	F7925 OLP	X	X		3/4"	25'	250 psi	S	Fuel
13	D84050 OLP	X			1"	50'	250 psi	S	Air / Water	18	F83000 OLP	X			3/4"	50'	500 psi	S	Fuel
9	5600 OMP	X	X		3/8"	30'	3000 psi	S	Oil	18	F83050 OLP	X			3/4"	50'	250 psi	S	Fuel
9	5630 OMP	X	X		3/8"	30'	2250 psi	S	Oil	18	FD83000 OLP	X	X		3/4"	75'	500 psi	S	Fuel
10	7600 OMP			X	3/8"	50'	3000 psi	S	Oil	18	FD9350 OLPBW	X			3/4"	50'	250 psi	S	Fuel
8	RT835-OMP	X			1/2"	35'	1000 psi	S	Oil	18	FD84000 OLP	X	X	X	1"	50'	500 psi	S	Fuel
11	DP5835 OMP	X			1/2"	35'	2000 psi	S	Oil	18	FD84050 OLP	X			1"	50'	250 psi	S	Fuel
10	7800 OMP	X	X	X	1/2"	50'	3000 psi	S	Oil	18	FD9400 OLPBW	X			1"	50'	500 psi	S	Fuel
10	7850 OMP	X	X	X	1/2"	50'	2000 psi	S	Oil	18	FD9450 OLPBW	X			1"	50'	500 psi	S	Fuel
11	DP7850 OMP	X	X		1/2"	50'	2000 psi	S	Oil	18	FF9500 OLPBW	X			1 1/4"	50'	600 psi	S	Fuel
9	A5825 OMP	X			1/2"	25'	2000 psi	S	Oil	18	FF9600 OLPBW	X			1 1/2"	50'	600 psi	S	Fuel
9	A5800 OMP	X			1/2"	25'	3000 psi	S	Oil	18	G 3050		X	X		50'		S	Grounding
12	D8800 OMP		X		1/2"	50'	3000 psi	S	Oil	18	G 3050 Y	X	X			50'		S	Grounding
12	D8850 OMP	X	X		1/2"	50'	2000 psi	S	Oil	18	G 3050 N	X	X			50'		S	Grounding
13	82000 OMP	X			1/2"	75'	2000 psi	S	Oil	18	GA3100 N	X				100'		S	Grounding
13	83000 OMP	X			3/4"	50'	1500 psi	S	Oil	46	TB 01			X		6'	0.0~1.5 lbs	S	Tool Balancer, w/ Rachet
9	5430 OHP	X			1/4"	30'	5000 psi	S	Grease	46	TB 03		X	X		6'	1.5~3 lbs	S	Tool Balancer, w/ Rachet
10	7450 OHP	X			1/4"	50'	5000 psi	S	Grease	46	TB 05		X	X		6'	3~5 lbs	S	Tool Balancer, w/ Rachet
10	7600 OHP				3/8"	50'	5000 psi	S	Grease	46	TB 10			X		8'	5~10 lbs	S	Tool Balancer, Constant Pull
10	7650 OHP			X	3/8"	50'	4000 psi	S	Grease	46	TB 12			X		8'	8~12 lbs	S	Tool Balancer, Constant Pull
11	DP7650 OHP	X	X		3/8"	50'	4000 psi	S	Grease	46	TB 15			X		8'	10~15 lbs	S	Tool Balancer, Constant Pull
12	D8650 OHP	X			3/8"	50'	4000 psi	S	Grease	46	TB 23			X		8'	16~23 lbs	S	Tool Balancer, Constant Pull
13	81000 OHP	X			3/8"	100'	5000 psi	S	Grease	46	TBL 10			X		8'	5~10 lbs	S	Tool Balancer, w/ Rachet
23	CU6050LN	X	X		3/8"	50'	300 psi	H	Air / Water	46	TBL 12			X		8'	8~12 lbs	S	Tool Balancer, w/ Rachet
23	CU6100LN	X			3/8"	100'	300 psi	H	Air / Water	46	TBL 15			X		8'	10~15 lbs	S	Tool Balancer, w/ Rachet
23	CU8050LN	X			1/2"	50'	300 psi	H	Air / Water	46	TBL 23			X		8'	16~23 lbs	S	Tool Balancer, w/ Rachet
23	CU8100LN	X			1/2"	100'	300 psi	H	Air / Water	42	TW5425 OLP	X			1/4"	25'	200 psi	S	Gas Welding
23	CT6050LN	X</																	



North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com
www.reelcraft.com/china

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire NN18 8AG United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
europe@reelcraft.com
www.reelcraft.com/europe

Pacific Rim

P.O. Box 53776, Clark Freeport Zone
Philippines 2023
Ph: +63 (45) 625-6624
Fax: +63 (45) 321-0643
rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
sales@recoila.com
www.reelcraft.com