DRAWING NUMBER	REV.
A 503D-300 SHEET 1 OF 1	B

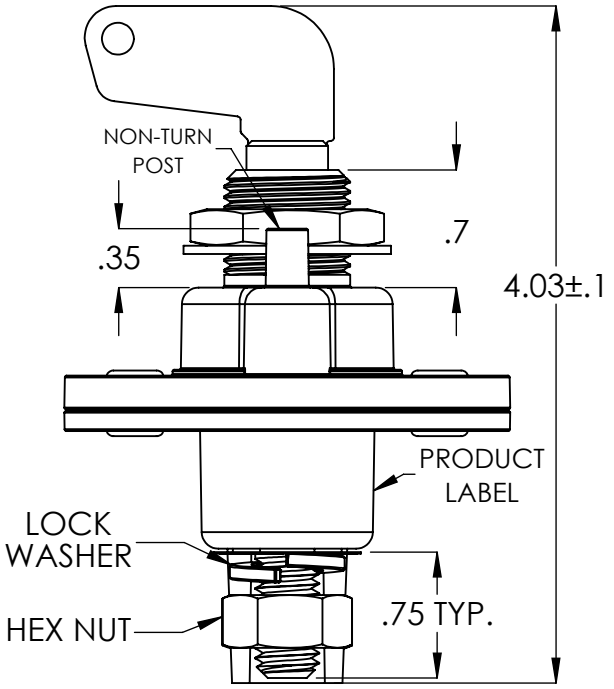

"OFF" POSITION

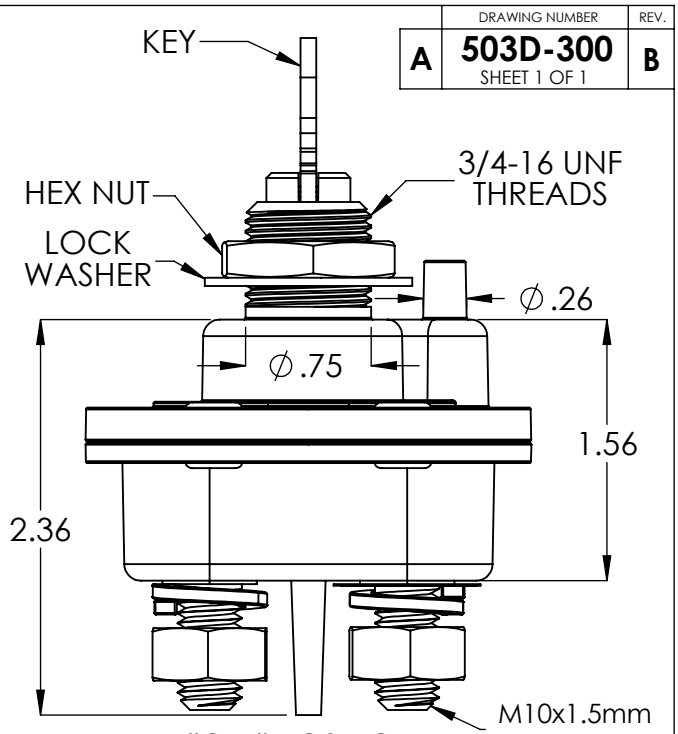

"OFF" POSITION

MOUNTING DETAIL

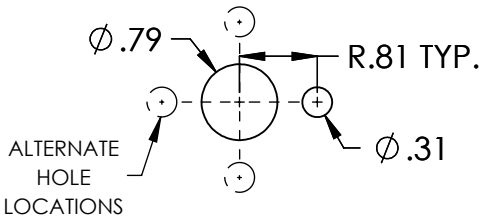

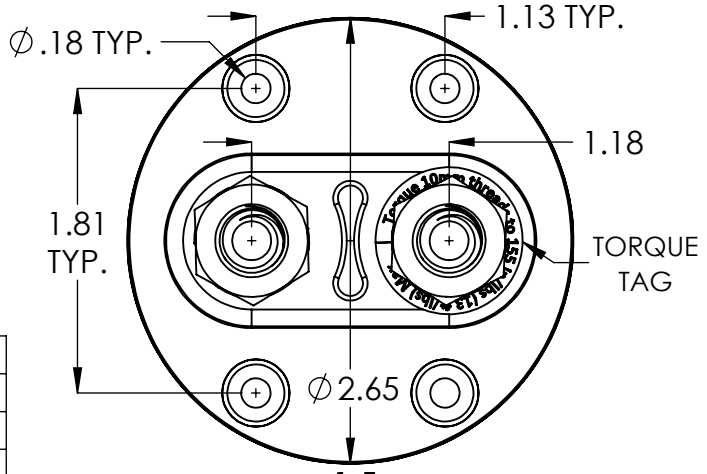

PRODUCT LABEL

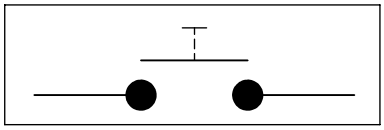

SPST CIRCUIT DIAGRAM

Technical Data	
Handle Material:	GF Nylon 6
Housing Material:	Zinc Diecast
Case Material:	GP Phenolic
Min. Insulation Resistance:	100 Mohm
Dielectric Withstanding Voltage:	1,100V - 1min
Voltage Drop Max:	0.175mV
Voltage:	to 48VDC
Duty Rating:	300A
Overload:	750A - 180sec
	1,500A - 30sec
Sealing:	IP67
Vibration:	4G / 50-2kHz
Shock:	6G / 11ms
Temperature Range:	-40 to +85C
Terminal Torque:	155 in.lbs
Mounting Torque:	18 ft.lbs

REV.	DESCRIPTION	DATE	APP'D
REVISIONS			

PROPRIETARY AND CONFIDENTIAL

This document contains proprietary data for products designed by Shallco, Inc., of Smithfield, NC. No disclosure; reproduction, or use of any part thereof may be made except by written permission.

	NAME	DATE
DRAWN	JRT	12-21-16
CHECKED		
ENG APPR.	RMF	12-21-16
MFG APPR.		
Q.A.		

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±.015
THREE PLACE DECIMAL ±.005

SHALLCO
308 COMPONENTS DRIVE, SMITHFIELD, NC 27577 USA

DO NOT SCALE DRAWING

TITLE: **KEYED BATTERY DISCONNECT 48VDC-300AMP**

BLANK WEIGHT: - PART WEIGHT: 0.7 LBS

SIZE A | DWG. NO. 503D-300 | REV. B | SHEET 1 OF 1

SCALE:1:2 | FILENAME: 503D-300

DWG NO:503D-300