

ATC® Blade Fuses

Specifications

Fast acting

Current Rating: 1-40A

Voltage Rating: 32VDC

Interrupt Rating: 1000A @ 32VDC


Housing Material: UL 94-V0 rated

Terminal Material: Tin-plated zinc alloy

Temperature Rating: -76°F (-60°C) to 230°F (110°C)

Marking: Amperage marking is OCR compliant.

Compliances: UL-Recognized (3-40A) available; SAE J1284;
ISO 8820-3; SAE J1171 (Ignition Protection) available, RoHS compliant

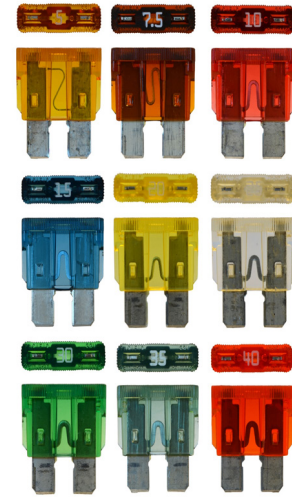

Dimensions in Inches (mm)

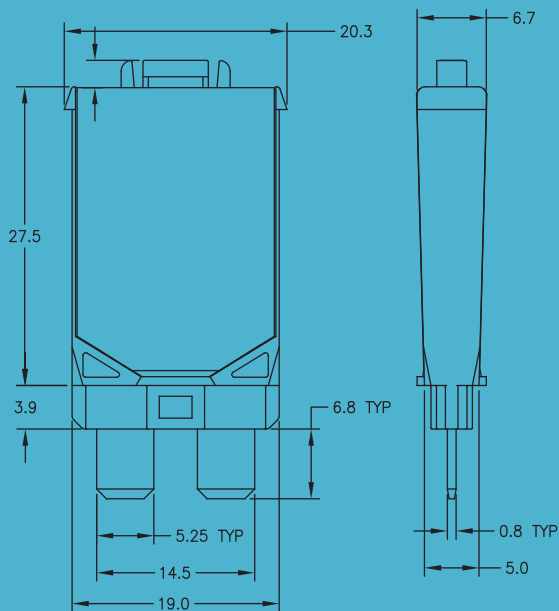


FIGURE 1. 22XXX-0XX WITH GENERAL DIMENSIONS




FIGURE 2. 22XXX-2XX




FIGURE 3. 22XXX-3XX




FIGURE 4. 22XXX-4XX

Specifications

Part Number (Amp)	Fuse Body Color
BK-ATC-1	Black
BK-ATC-2	Gray
BK-ATC-3	Violet
BK-ATC-4	Pink
BK-ATC-5M	Tan
BK-ATC-7-1-2M	Brown
BK-ATC-10M	Red
BK-ATC-15M	Blue
BK-ATC-20M	Yellow
BK-ATC-25M	Clear
BK-ATC-30M	Green
BK-ATC-35	Blue/Green
BK-ATC-40	Orange

Time Current Curves

