


Standards :

- ISO 8820-3:2010

Packaging :

- 3.000 pz.

Example Fuse time-current curve (FORM C 10A) :

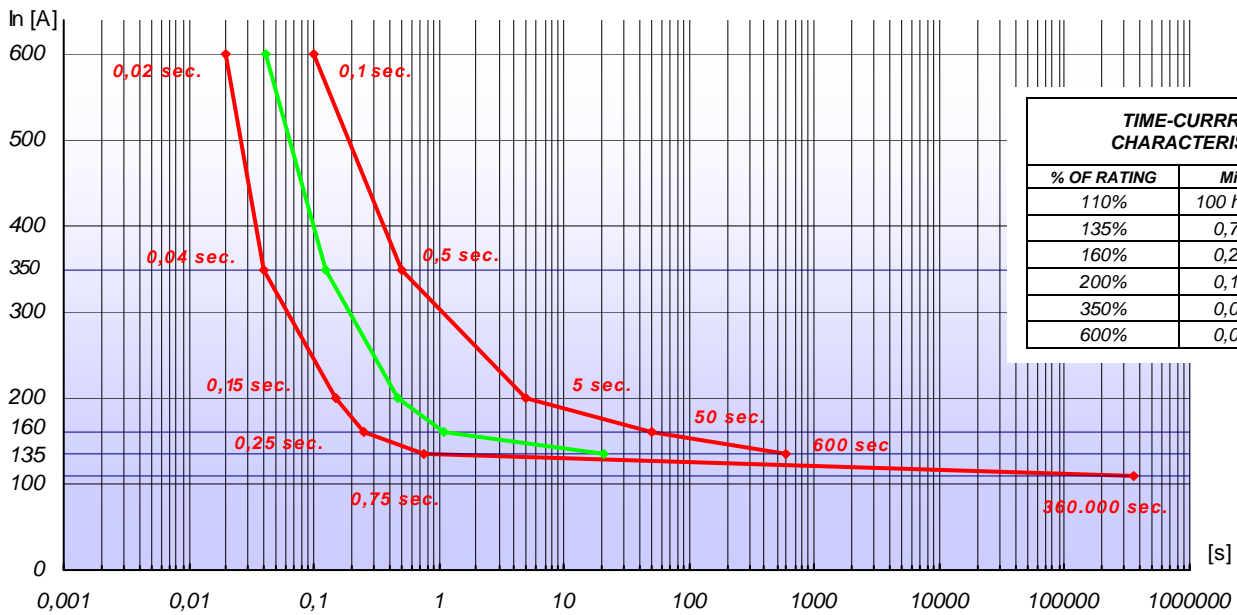

AΩ Part. No	Rated current	Rated voltage	Nominal Cold resistance	Colour	Voltage Drop max.	Breaking capacity
50.001.0	1A	32V	122,0mΩ	Black	250mV	1000A 32V DC Leackage current I _{max} : 0,3mA
50.002.0	2A	32V	51,0mΩ	Grey	225mV	
50.003.0	3A	32V	30,0mΩ	Violet	200mV	
50.004.0	4A	32V	21,7mΩ	Pink	200mV	
50.005.0	5A	32V	16,7mΩ	Tan	175mV	
50.007.5	7.5A	32V	10,5mΩ	Brown	150mV	
50.010.0	10A	32V	7,2mΩ	Red	140mV	
50.015.0	15A	32V	4,7mΩ	Blue	125mV	
50.020.0	20A	32V	3,4mΩ	Yellow	125mV	
50.025.0	25A	32V	2,4mΩ	Natural	125mV	
50.030.0	30A	32V	2,0mΩ	Green	120mV	
50.035.0	35A	32V	1,8mΩ	Dark green	120mV	
50.040.0	40A	32V	1,3mΩ	Orange	120mV	