


Standards :

- ISO 8820-3:2010

Packaging :

- 3.000 pz.

Example Fuse time-current curve (FORM F 10A) :

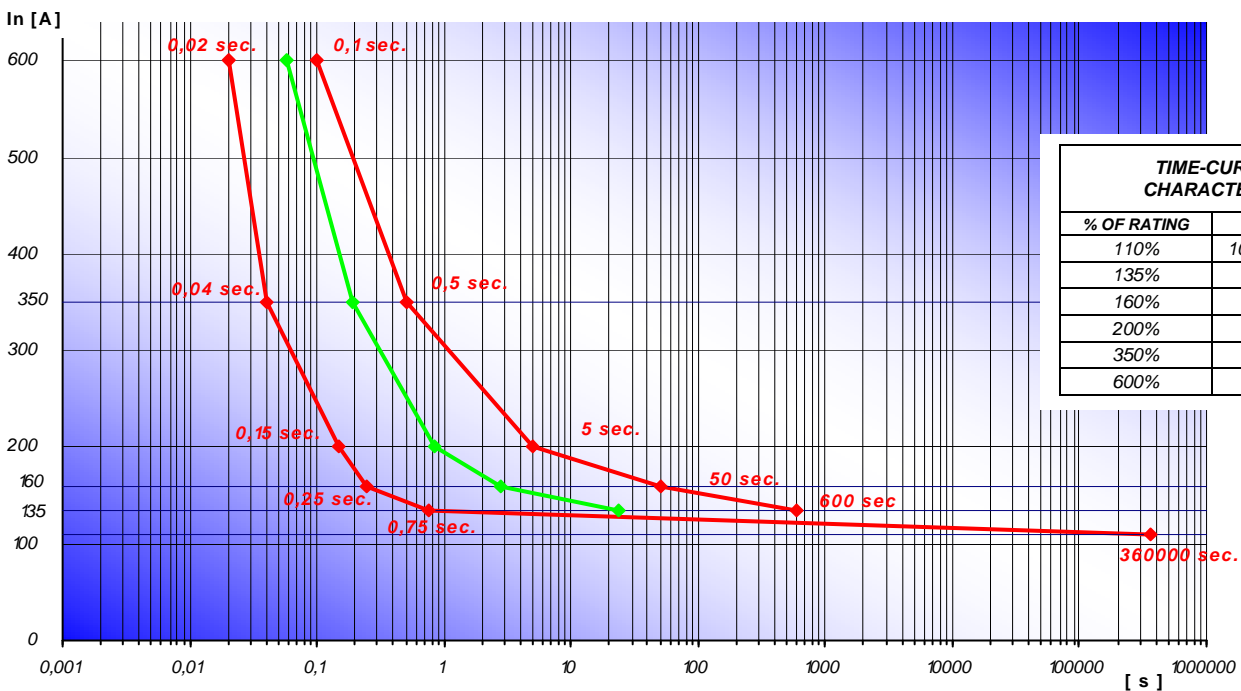

TIME-CURRENT CHARACTERISTICS		
% OF RATING	Min.	Max.
110%	100 hours	/
135%	0,75s	600s
160%	0,25s	50s
200%	0,15s	5,0s
350%	0,04s	0,5s
600%	0,02s	0,1s

AΩ Part. No	Rated current	Rated voltage	Nominal cold resistance	Colour	Voltage Drop max.	Breaking capacity
30.005.0	5A	32V	17,4mΩ	Tan	175mV	Leakage current To agree upon
30.007.5	7,5A	32V	11,2mΩ	Brown	150mV	
30.010.0	10A	32V	7,8mΩ	Red	125mV	
30.015.0	15A	32V	4,6mΩ	Blue	125mV	
30.020.0	20A	32V	3,2mΩ	Yellow	125mV	
30.025.0	25A	32V	2,6mΩ	Natural	125mV	
30.030.0	30A	32V	2,1mΩ	Green	120mV	