


CTR-SS

STAINLESS STEEL ACCESS DOOR WITH HIDDEN FLANGE - FOR ALL SURFACE TYPES

INSTALLATION

> EXCLUSIVE <
ACCESS DOOR

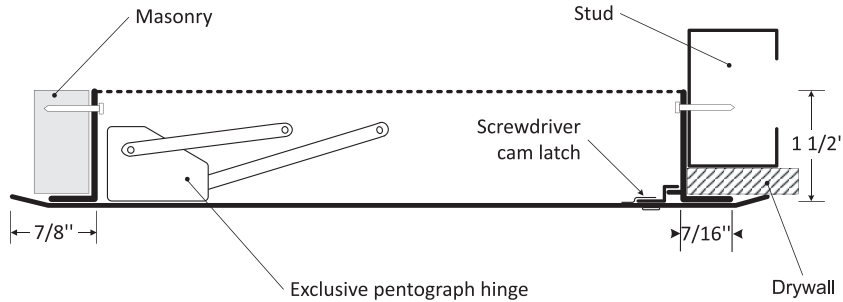

A LABOR SAVING alternative to doors with DRYWALL FLANGES


"No need to mud or plaster"

DIMENSIONS AND APPEARANCE


LEED ready: This product contributes to LEED® credits.

ACCESS DOORS
MADE FAST!

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS
8 1/4 x 8 1/4 (210 x 210)	1
8 1/4 x 12 (210 x 304)	1
10 x 10 (254 x 254)	1
12 x 12 (304 x 304)	1
14 x 14 (355 x 355)	1
12 x 18 (304 x 457)	1
16 x 16 (406 x 406)	1
18 x 18 (457 x 457)	3
18 x 24 (457 x 609)	4
20 x 20 (508 x 508)	3
22 x 22 (558 x 558)	3
22 x 30 (558 x 762)	5
22 x 36 (558 x 914)	5
24 x 24 (609 x 609)	4
24 x 30 (609 x 762)	5
24 x 36 (609 x 914)	5

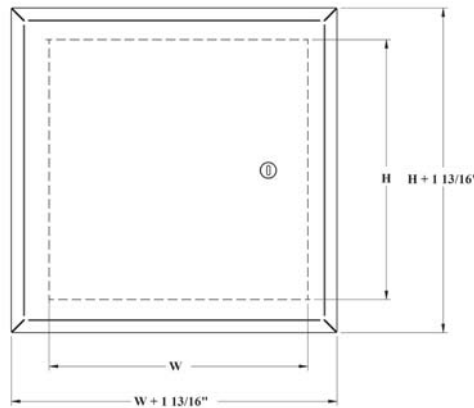

Rough wall opening is door size + 1/4" or + 6mm

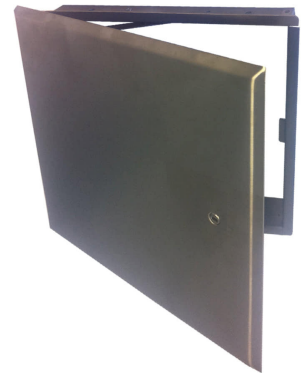


DESCRIPTION AND MATERIAL SPECIFICATION

- Material:** 16 gauge stainless steel: type 304
- Hinge:** concealed, exclusive hinge design
- Lock / latch:** screwdriver operated cam latch
- Finish:** # 4 - satin finish
- Packaging:** individually wrapped, 1 per box

POPULAR OPTIONS:

- Lock / latch:** key operated cylinder cam latch, hex head cam latch, pinned hex head cam latch, handle operated cam latch, mortise preparation for cylinder.
- Gasketing:** neoprene gasket

INSIDE HINGE SHOWN:



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			