

Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching for Glass 3/16" to 1/4"  
Frame Has Single-side Fasteners. Available in Round Shapes or Wood Veneer


### SPECIFICATIONS:

<b>Material:</b>	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
<b>Door:</b>	For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size.
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish. <u>Woodlite</u> has wood veneer plugs covering screw heads.
<b>Powder Coat Finishes:</b>	____ (B) Mineral Bronze ____ (G) Gray (stock colors for VSL) ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (BRA) Brass ____ (S) Sand ____ (AB) AMS Beige ____ <a href="#">View Color Samples Online</a>
<b>Glass:</b>	3/16"- 1/4" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. Glass size is 1" under order size. <b>Fire-Rated Air Louvers Glazing to fit this Product: WS, KFRF, PYRO, and PPF.</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSL and SLR, <b>depending on the glazing used</b> . See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

### OPTIONS AT ADDITIONAL COST:



<b>PAK:</b>	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually.
<b>UBC 7-2 Installation:</b>	____ Additional intumescent tape for Positive Pressure UL10C. See detailed installation instructions. <b>NOTE: Intumescent tape NOT needed for 20 Minute Wood doors for UL Label.</b>
<b>Finishes &amp; Materials:</b>	____ (S) 20 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanized Sheet for Exterior Applications. ____ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Woodlite Wood Veneers:</b>	____ VWL .010 Wood Veneer to Match Wood Finish. (excludes SLR ) Rated 90 mins ____ Veneer Type: (MA) Maple, (WB) White Birch, (RO) Red Oak. <a href="#">See website for more wood type codes and photos.</a> Up to 60" x 77". Samples upon request.
<b>Fasteners:</b>	____ Torx ____ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Round Lite Two Sizes:</b>	____ VSLR-12: One piece, 18 gauge construction. 11" glazing. (n/a (S) material) ____ VSLR-18: One piece, 18 gauge construction. 17" glazing. (n/a (S) material)
<b>Privacy Screen:</b>	Add the Velo Privacy Screen to This Vision Lite— <a href="#">See Web Page for Details</a>
<b>Custom:</b>	Contact customer service for special orders.

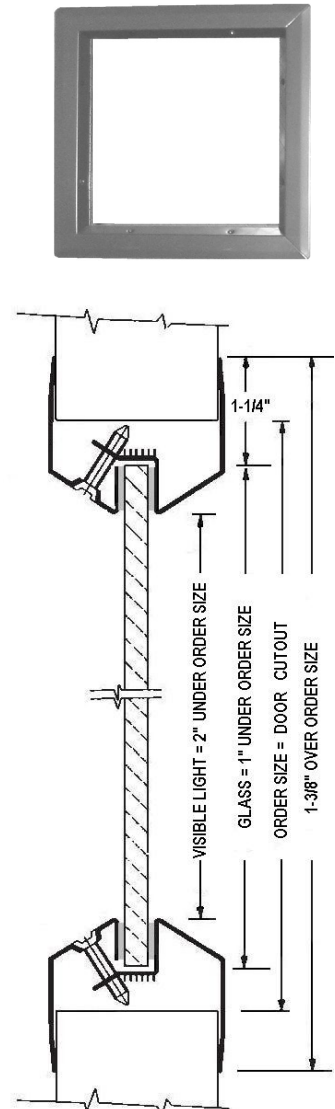

**STOCK ITEM - MANY  
STANDARD SIZES OF VSL  
FRAMES IN STOCK FOR  
NEXT DAY SHIPMENT FROM  
ALL WAREHOUSES**

### Order Format:

VSL, VSLR, VWL Option S,G,E W H Color

Example: VSL 1212W

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 © 2019 Activar Construction Products Group, Inc.	<b>Distributor:</b>	
	<b>Architect:</b>	
	<b>Contractor:</b>	
	<b>Project:</b>	