

Careguard®

Laminar Stream - 1.5 gpm max

Flow Restricted Regular Size

Features and Benefits

- Provides a splash free crystal clean (non aerated) stream.
- With built in Agion® antimicrobial protection.
- Saves water and energy (1.5 gpm max)
- Unique screenless 100% plastic Cascade® construction prevents lime build up.
- Recommended for use in medical facilities to prevent airborne bacteria from entering the water stream.
- Virtually unbreakable single piece insert ensures a longer useable life.
- compatible with all NEOPERL® regular male and female housings, vandal proof and metric size housings.

Certification

ANSI/NSF 61
 ASME A112.18.1 M
 Meets the guidelines of the LEED® program for a 30% reduction in flow rate over EPAAct 2005.
 WaterSense listed



Designation & Thread Sizes

Designation	Thread Size
Insert only	
Regular male	15/16"-27
Regular female	55/64"-27
Regular dual thread	15/16"-27 x 55/64"-27
Regular male vandal proof	15/16"-27
Regular female vandal proof	55/64"-27
Regular dual thread vandal proof	15/16"-27 x 55/64"-27
Vandal key	

*Other combinations also available

Housings



Regular Male



Regular Male VP



Regular Female



Regular Female VP


Color Code

Dome: Gray	Ring: Gray	Basket: Gray
------------	------------	--------------




Dimensions

No	mm	In
A	12.00	.472
B	20.95	.825
C	≈ 13	≈ 1/2

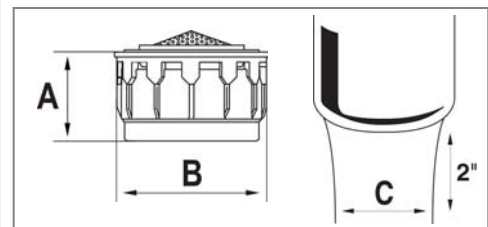

Flow Rate Curve

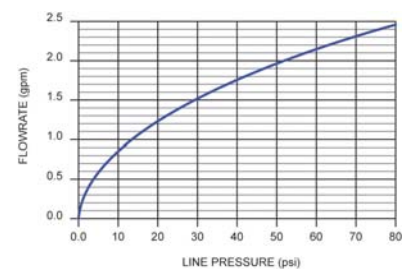

Technical Data

Material:

Body Acetal
 O-ring Silicone

Working temperature: 150°F
 Working pressure: 125 psi