



**CONSERVATION
WAREHOUSE**

Tel: (800) 875-2955
Fax: (484) 944-1590

www.conservationwarehouse.com
Certified WBE Company

PCA® Mikado® Spray Faucet Attachment - 0.35 gpm max Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- ▶ Distinguished stream with delicate lines and a unique spray pattern.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372 (pending)
ASME A112.18.1M and CSA B125 (pending)
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
32 335	Insert only	
32 300	Regular male	15/16"-27
32 310	Regular female	55/64"-27
32 320	Regular dual thread	15/16"-27 x 55/64"-27
32 304	Vandal Proof Regular male	15/16"-27
32 314	Vandal Proof Regular female	55/64"-27
32 326	Vandal Proof Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts *1 pc (bag), 6 pcs (tube), 50 pcs (bag)*
Reg. male/female/dual thread *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*
Reg. vandal proof male/female/dual thread *1 pc (bag), 6 pcs (tube), 40 pcs (tray)*

Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

Flow Rate Curve

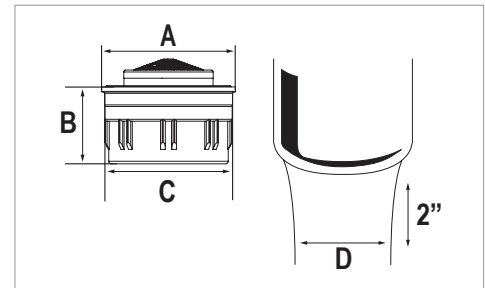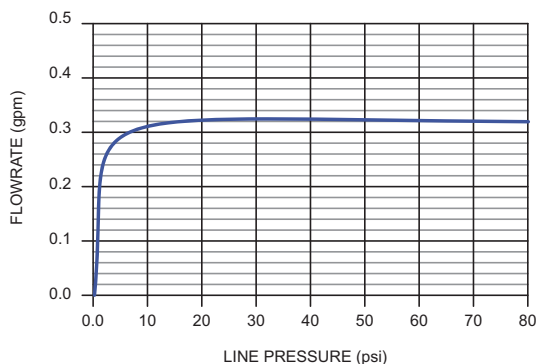

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

