

# PCA® Perlator®

## Faucet Attachment - 1.0 gpm max

Pressure compensating Small Size

### Features and Benefits

- Pressure compensating for constant flow from 20 to 80 psi.
- Anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Color-coded to identify flow rate.
- Patented construction provides a splash-free stream, well aerated and soft to the touch.
- Available housing finishes: chrome.
- Marking: roll (custom and/or statutory mark) or laser for vandal proof housings only (custom logo possible).
- Rubber washer.

### Certification

ANSI/NSF 61

ASME A112.18.1M

CSA B125

WaterSense listed



### Designation & Thread Sizes

| Designation               | Thread Size |
|---------------------------|-------------|
| Insert only               |             |
| Small male                | 13/16"-27   |
| Small female              | 3/4"-27     |
| Small male vandal proof   | 13/16"-27   |
| Small female vandal proof | 3/4"-27     |
| Vandal key                |             |
|                           |             |
|                           |             |

\*Other combinations also available

### Housings



Small Male



Small Male VP



Small Female



Small Female VP


### Insert Color Code

|             |             |              |
|-------------|-------------|--------------|
| Dome: White | Ring: White | Basket: Gray |
|-------------|-------------|--------------|




### Dimensions

| No | mm    | In     |
|----|-------|--------|
| A  | 10.21 | .402   |
| B  | 18.20 | .717   |
| C  | ≈ 11  | ≈ 7/16 |

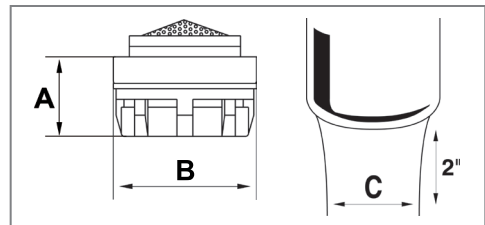

### Flow Rate Curve

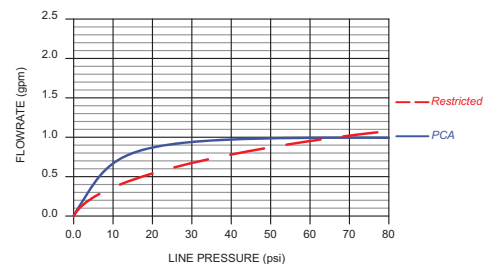

### Technical Data

Material:

Body Acetal  
O-ring EPDM  
Washer EPDM

Working temperature: 150°F  
Working pressure: 125 psi