



**CONSERVATION
WAREHOUSE**

Tel: (800) 875-2955

Fax: (484) 944-1590

www.conservationwarehouse.com

Certified WBE Company

PCA® Perlator® Faucet Aerator - 1.0 gpm max

Pressure Compensating Regular Size





flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel, and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense

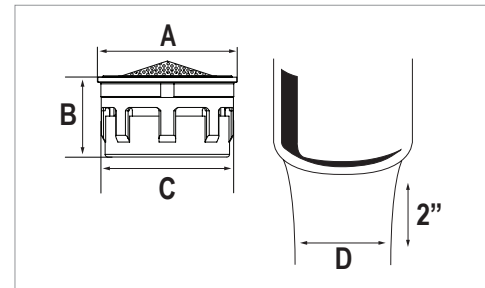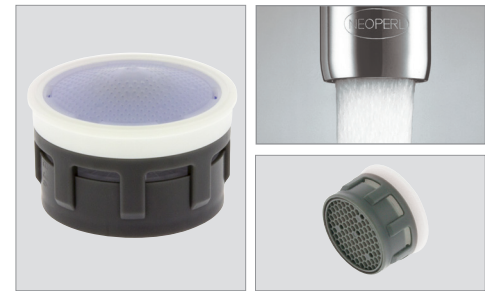

Thread & Part Number

Part #	Designation	Thread Size
11 735	Insert only	
11 700	Regular male	15/16"-27
11 710	Regular female	55/64"-27
11 720	Regular dual thread	15/16"-27 x 55/64"-27
11 704	Vandal proof regular male	15/16"-27
11 714	Vandal proof regular female	55/64"-27
11 726	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.


Packaging:

Inserts 1 pc (bag), 6 pcs (tube), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Blue	Dark Gray

Flow Rate Curve

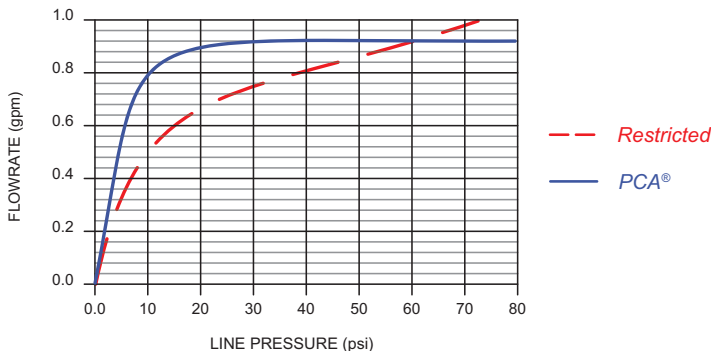

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

