

# PCA® Perlator®

## Laminar stream - 1.5 gpm

Pressure compensating Small Size

### Features and Benefits

- Pressure compensating for constant flow from 20 to 80 psi.
- Anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Color-coded to identify flow rate.
- Patented construction provides a splash-free crystal clear (non aerated) stream.
- Available housing finishes: chrome.
- Marking: roll (custom and/or statutory mark) or laser for vandal proof housings only (custom logo possible).
- Rubber washer.

### Certification

ANSI/NSF 61  
ASME A112.18.1M  
CSA B125  
WaterSense listed



### Designation & Thread Sizes

Designation	Thread Size
Insert only	
Small male	13/16"-27
Small female	3/4"-27
Small male vandal proof	13/16"-27
Small female vandal proof	3/4"-27
Vandal key	

\*Other combinations also available

### Housings



Small Male



Small Male VP



Small Female



Small Female VP


### Insert Color Code

Dome: Green	Ring: White	Basket: Light gray
-------------	-------------	--------------------




### Dimensions

No	mm	In
A	10.21	.402
B	18.20	.717
C	≈ 11	≈ 7/16

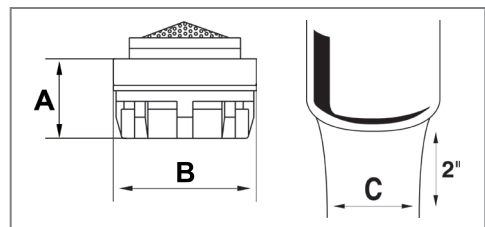

### Flow Rate Curve

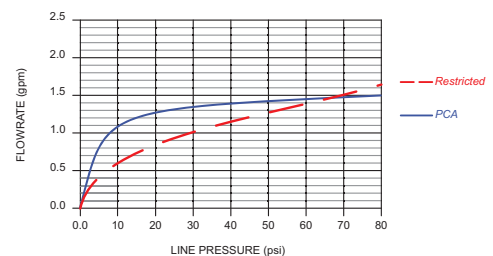

### Technical Data

Material:

Body Acetal  
O-ring EPDM  
Washer EPDM

Working temperature: 150°F  
Working pressure: 125 psi