

PCA® Spray

Faucet Attachment - 0.5 gpm max

Pressure compensating Tom Thumb® Size

Features and Benefits

- Pressure compensating for constant flow from 20 to 80 psi.
- Provides non-splashing, non-aerated spray.
- Anti-clogging dome screen filters sediment and particles.
- Color-coded to identify flow rate.
- Virtually unbreakable single piece insert ensures a longer usable life.
- Available housing finishes: chrome.
- Compatible with all NEOPERL® Tom Thumb® male and female metric size housings.
- Rubber washer.

Certification

Designation & Thread Sizes

Designation	Thread Size
Insert only	
Tom Thumb male	M18 x 1
Tom Thumb female	M16 x 1

*Other combinations also available

Housings



Tom Thumb Male



Tom Thumb Female


Insert Color Code

Dome: White / Green	Diffuser: Lime Green	Basket: Gray
---------------------	----------------------	--------------




Dimensions

No	mm	In
A	12.90	.508
B	15.00	.591
C	≈ 16	≈ 5/8

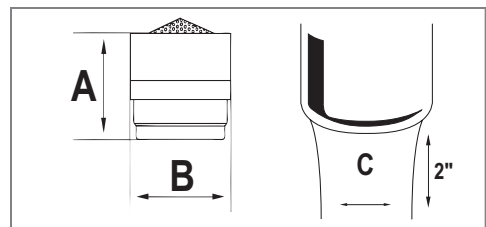

Flow Rate Curve

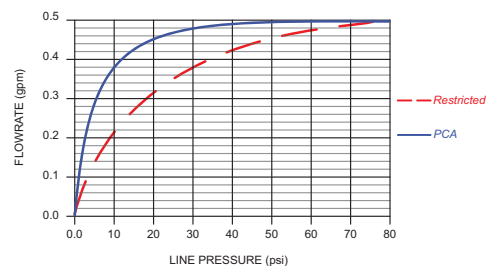

Technical Data

Material:

Body: Acetal
 O-ring: EPDM
 Washer: NBR

Working temperature: 150°F
 Working pressure: 125 psi