



**CONSERVATION
WAREHOUSE**

Tel: (800) 875-2955

Fax: (484) 944-1590

www.conservationwarehouse.com

Certified WBE Company

PCA® Spray Faucet Attachment - 0.35 gpm max Pressure Compensating Junior Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED® points in green buildings.

Certifications

ANSI/NSF®-61-372

ASME A112.18.1M and CSA B125 (pending)

Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
13 665	Insert only	
13 670	Junior male	13/16"-27
13 680	Junior female	3/4"-27
13 658	Junior dual thread	13/16"-27 x 3/4"-27
13 674	Vandal proof junior male	13/16"-27
13 684	Vandal proof junior female	3/4"-27
13 659	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (tube), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. dual thread/vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

Flow Rate Curve

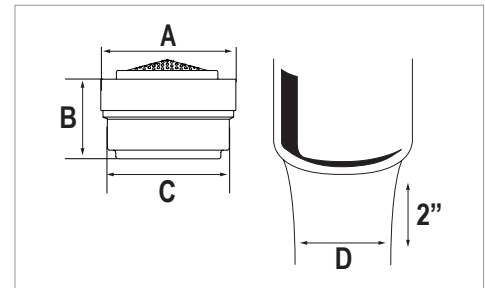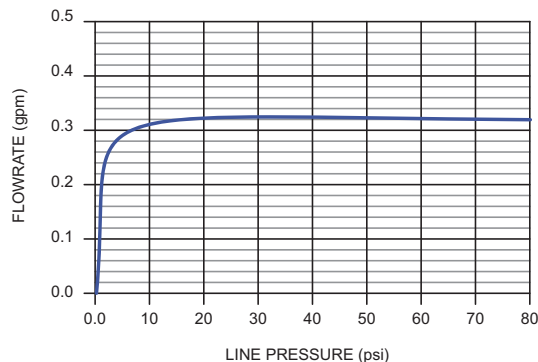

Dimensions

No	mm	In
A	18.20	.717
B	10.35	.407
C	16.60	.654
D	≈ 22	≈ 7/8

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

