



**CONSERVATION  
WAREHOUSE**

Tel: (800) 875-2955

Fax: (484) 944-1590

www.conservationwarehouse.com

Certified WBE Company

## PCA® Spray

### Faucet Attachment - 0.35 gpm max

#### Pressure Compensating Tom Thumb® Size



flow, stop and go®

#### Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED® points in green buildings.

#### Certifications

ANSI/NSF®-61-372 (pending)

ASME A112.18.1M and CSA B125 (pending)

Meets **CALGreen** requirements

#### Thread & Part Number

Part #	Designation	Thread Size
13 695	Insert only	
13 696	Tom Thumb® male	M18x1
13 697	Tom Thumb® female	M16x1

Other product combinations available.



#### Packaging:

Inserts *1 pc (bag), 6 pcs (bag), 50 pcs (bag)*  
Tom Thumb® male/female *1 pc (bag), 50 pcs (tray)*

#### Color Code

Dome	Flow Regulator	Basket
Clear	Brown	Dark Gray

#### Flow Rate Curve

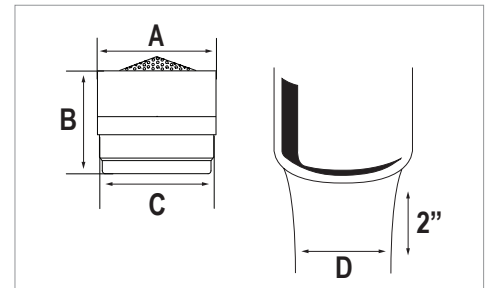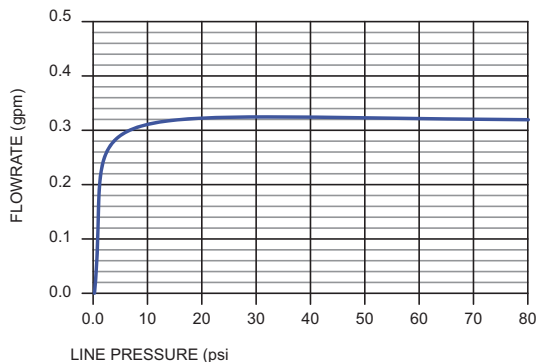

#### Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 16	≈ 5/8

#### Housings



Tom Thumb® Male



Tom Thumb® Female

#### Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer NBR

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

