

# Perlator®

## Faucet Aerator - 1.0 gpm max

Flow Restricted Regular Size

### Features and Benefits

- ⇒ Watercolours® design: color coding to identify flow rate and stream pattern (U.S. patent pending).
- ⇒ Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ⇒ Anti-clogging dome screen filters sediment and particles.
- ⇒ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ⇒ Compatible with all NEOPERL® regular male and female housings, vandal proof and metric size housings.
- ⇒ Available housing finishes: chrome.
- ⇒ Laser marked housings: custom logo.
- ⇒ Rubber washer.

### Certification

ANSI/NSF 61

### Designation & Thread Sizes

| Designation                      | Thread Size           |
|----------------------------------|-----------------------|
| Insert only                      |                       |
| Regular male                     | 15/16"-27             |
| Regular female                   | 55/64"-27             |
| Regular dual thread              | 15/16"-27 x 55/64"-27 |
| Regular male vandal proof        | 15/16"-27             |
| Regular female vandal proof      | 55/64"-27             |
| Regular dual thread vandal proof | 15/16"-27 x 55/64"-27 |
| Vandal key                       |                       |

\*Other combinations also available

### Housings




Regular Male



Regular Male VP



Regular Female



Regular Female VP


### Color Code

|             |             |                   |
|-------------|-------------|-------------------|
| Dome: Ivory | Ring: White | Basket: Dark Gray |
|-------------|-------------|-------------------|




### Dimensions

| No | mm    | In    |
|----|-------|-------|
| A  | 12.00 | .472  |
| B  | 19.97 | .786  |
| C  | ≈ 13  | ≈ 1/2 |

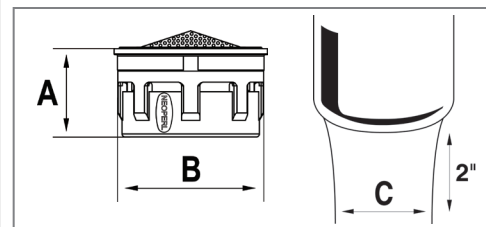

### Flow Rate Curve

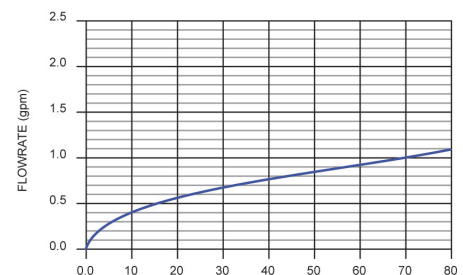

### Technical Data

Material:

Body: Acetal  
 O-ring: EPDM  
 Washer: EPDM

Working temperature: 150°F  
 Working pressure: 125 psi