

Perlator®

Faucet Aerator - 2.2 gpm

Flow Restricted Small Size

Features and Benefits

- ⇒ Anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ⇒ Anti-clogging dome screen filters sediment and particles.
- ⇒ Color-coded to identify flow rate
- ⇒ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ⇒ Compatible with all NEOPERL® regular male and female housings, vandal proof and metric size housings.
- ⇒ Available housing finishes: unplated, chrome and PVD.
- ⇒ Marking: roll (custom and/or statutory mark) or laser for vandal proof housings only (custom logo possible).
- ⇒ Rubber washer.

Certification

ANSI/NSF 61

Designation & Thread Sizes

Designation	Thread Size
Insert only	
Small male	13/16"-27
Small female	3/4"-27
Small male vandal proof	13/16"-27
Small female vandal proof	3/4"-27
Vandal key	

*Other combinations also available

Housings



Small Male



Small Male VP



Small Female



Small Female VP


Color Code

Dome: Red	Ring: White	Basket: Dark Gray
-----------	-------------	-------------------




Dimensions

No	mm	In
A	10.21	.402
B	18.20	.717
C	≈ 11	≈ 7/16

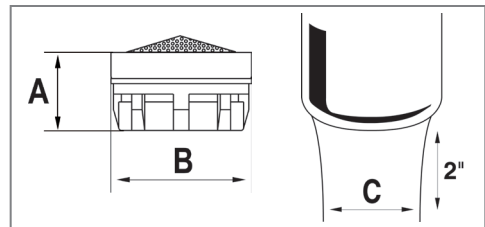

Flow Rate Curve

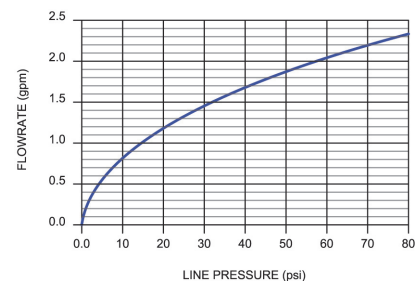

Technical Data

Material:

Body: Acetal
O-ring: EPDM
Washer: EPDM

Working temperature: 150°F
Working pressure: 125 psi