Mounting Washers and Locking Ring ®


Approximate Dimensions in Inches (mm)

Size	Description	Material	Thickness Dim. "A"	Inside Diameter Dim "B"	Across Flats Dim. "C"	Dimension Across Corners Dim. "D"	Catalog Number	
For 15/32 bushing	Locking ring	Zinc-plated steel	0.040 (1.02)	0.475 (12.07)	0.718 (18.24)	_	29-761-5	

Dimensions

Approximate Dimensions in Inches (mm)

Mounting Hardware

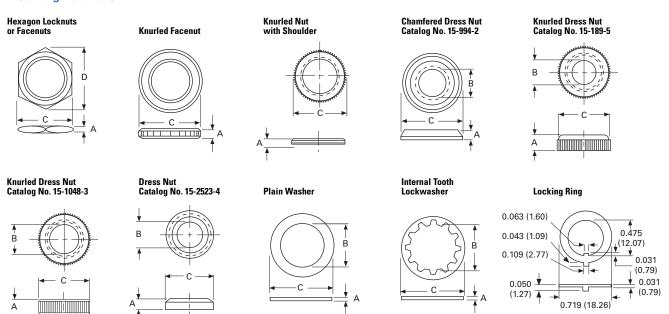

Note

① Hardware items are sold for use with Eaton switches only.

Decorator Facenuts

Product Selection ^①

Туре	Color	Catalog Number
Knurled facenuts	Bright black Bright clear	15-1048-3 15-1048-7
Beveled facenuts	Bright black Bright clear	15-1049-3 15-1049-7

Dimensions


Approximate Dimensions in Inches (mm)

Catalog Number 15-1048 Catalog Number 15-1049 0.438 (11.13) 0.438 (11.13) Dia. Hole Dia. Hole 0.625 0.625 (15.88) -_ (15.88) _ Dia. 0.060 Dia 20° (1.63)

Panel Seal

- Prevents moisture and contaminants from entering panel enclosure
- Behind panel mounting
- Stainless-steel cup washer ensures proper seating of silicone rubber seal
- Seal withstands 20 psi water pressure
- Cat. No. 32-341

Dimensions - 32-341



Replacement Terminal Screws

Product Selection

Screw Size	Catalog Number ②
#5-40 x 1/8 in	11-1117
#5-40 x 5/32 in	11-26
#5-40 x 3/16 in binding head	811-7206
#5-40 x 1/4 in binding head	811-14
#6-32 x 3/16 in binding head	811-2
#6-32 x 1/4 in binding head	811-161
#6-32 x 1/4 in binding head	811-7248
#6-32 x 1/4 in pan head, brass	11-1893
#6-32 x 3/8 in binding head	811-129
#8-32 x 3/16 in binding head	11-1618
#8-32 x 1/4 in	11-1369
#8-32 x 1/4 in	811-408-2
#8-32 x 3/8 in binding head	11-1766
#8-32 x 3/8 in binding head	11-6074-4
#6-32 x 7/32 in binding head	11-6085-2

Toggle Boot


- Prevents moisture and contaminants from entering lever to bushing enclosure
- · Front panel mounting
- Threaded mounting nut ensures proper assembly of silicon rubber boot
- Brass nut: 15/32-32 NS-2A
- Black color

SW1RY3030

Product Selection

Mounting Description	Color	Number
Front panel mounting Molded in brass mounting nut (15/32-32 NS-2A) ensures proper assembly of silicon rubber boot	Black	SW1RY3030

Dimensions—15/32-32 NS-2A



Notes

- ① Decorator facenuts for 15/32 in bushing switches, 15/32-32 thread.
- ² Hardware items are sold for use with Eaton switches only.

Indicating Plates


Product Selection—Indicating Plates for 15/32-Inch Bushing Mounted Switches

	Keyway Location	Marking Opposite Keyway	Keyway Side	Material	Finish	Catalog Number
ON	Keyway on bottom	ON	OFF	0.032 in steel	Plain	30-5632
					Statuary bronze	30-5632-3
					Burnished nickel	30-5632-4
OFF				0.032 in brass	Black cupric oxide ①	30-2899-3
		RAD	PHO	0.032 in steel	Statuary bronze	30-5632-7
					Burnished nickel	30-5632-6
		RUN	START	0.032 in steel	Burnished nickel	30-5632-11
		HOT	COLD	_		30-5632-15
		HI	LOW	_		30-5632-16
		ON	STOP			30-5632-17
		FOR	REV	0.032 in steel	Burnished nickel	30-2899-2
		AUTO	TEST			30-2899-6
		PUSH	START			30-2899-7
		RUN	TEST			30-2899-9
		BLANK	BLANK	0.032 in steel	Burnished nickel	30-5632-8
	Keyway on side	ON	OFF	0.032 in steel	Burnished nickel	30-5632-13
O N		OFF	ON	_		30-2899-8
N	Keyway on top	T	В	0.032 in steel	Burnished nickel	30-5632-12
		OFF	ON	_		30-5632-14
OFF		SET	RUN			30-2899-10
		BLANK	RESET			30-2899-12
.]	Keyway on top	0	I	0.032 in steel	Burnished nickel	30-5632-23
		I	0			30-5632-19

Dimensions

Approximate Dimensions in Inches

Indicating Plate



Note

① White lettering.